



REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAY12/17	L.CHAN

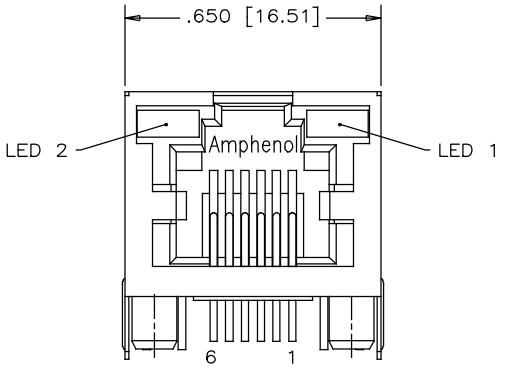

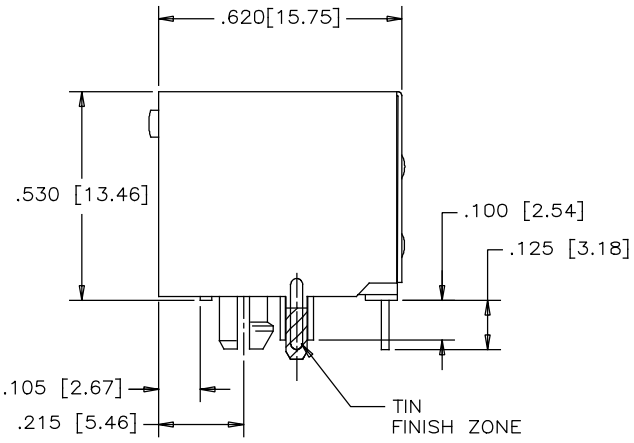


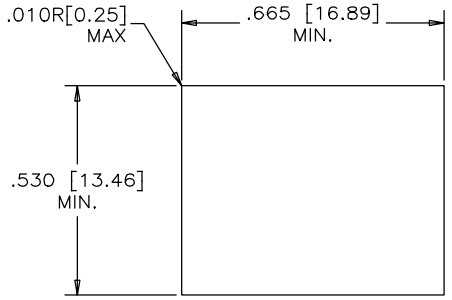


RECOMMENDED PANEL CUTOUT

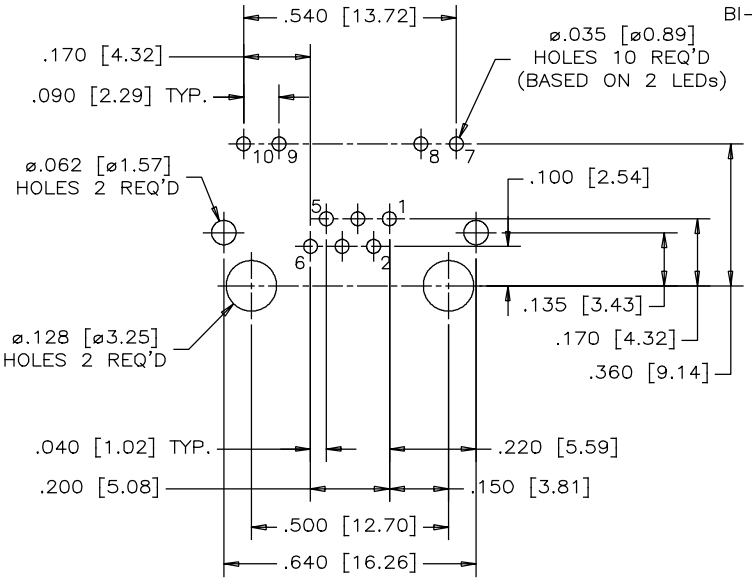

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

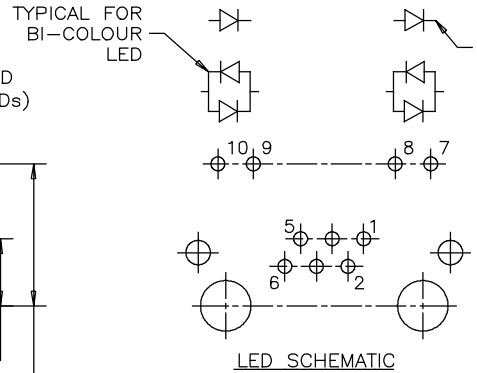

LED SCHEMATIC



BI-COLOUR LED DETAIL
(RED/YELLOW AND GREEN/ORANGE
LED'S ARE ALSO AVAILABLE)

MATERIALS:

PLASTIC HOUSING: THERMOPLASTIC POLYESTER
FLAMMABILITY RATING UL 94V-0

CONTACTS: PHOSPHOR BRONZE
PLATING: 50 MICROINCHES
[1.27 MICRONS] MIN.
GOLD OVER NICKEL
TIN/LEAD TAIL

SHIELD: COPPER ALLOY
PLATING: NICKEL WITH TIN FINISH ON TAIL.

PART NUMBER: RJHSE-7F6X
REFER TO LED OPTIONS DRAWING
FOR ORDERING CODES

AMPHENOL CANADA CORP
RoHS COMPLIANT
2011/65/EU RECAST

UNLESS SPECIFIED OTHERWISE	DRAWN W.QIU	DATE MAY12/17	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS INCH	CHECKED L.CHAN	MAY12/17	
SECONDARY MILLIMETER	M.E. APP'D		TITLE: HIGH SPEED MODULAR JACK, 6 POSITIONS, 6 STAMPED CONTACTS, SHIELDED, WITH LED'S
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE ±0.025	ENG. REL. NO.		DWG. NO. P-RJHSE-7F6X REV A
2 DECIMAL PLACES ±0.020	REF.		
3 DECIMAL PLACES ±0.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1
ANGULAR DEGREES ±1.0°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.