


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	FEB08/22	L.CHAN

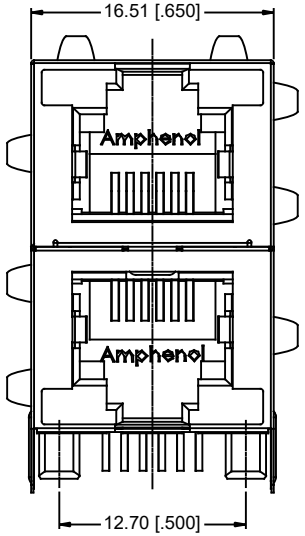


FRONT VIEW

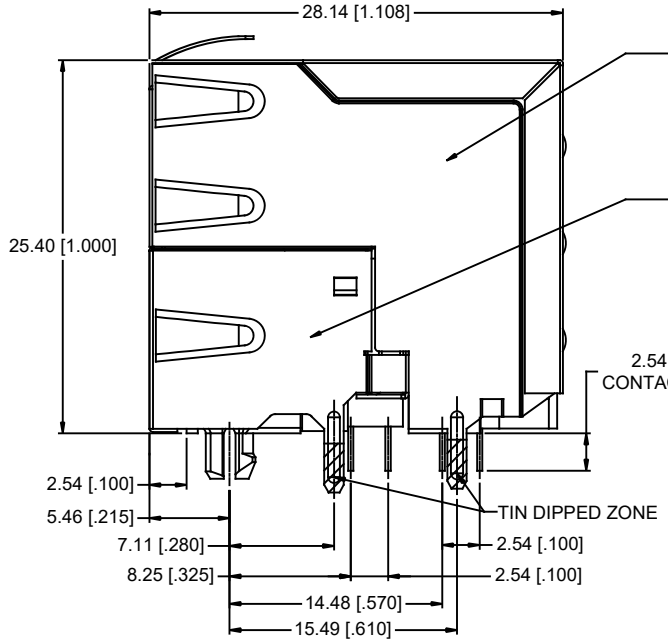

SIDE VIEW



ISOMETRIC VIEW
(SCALE 2:1)

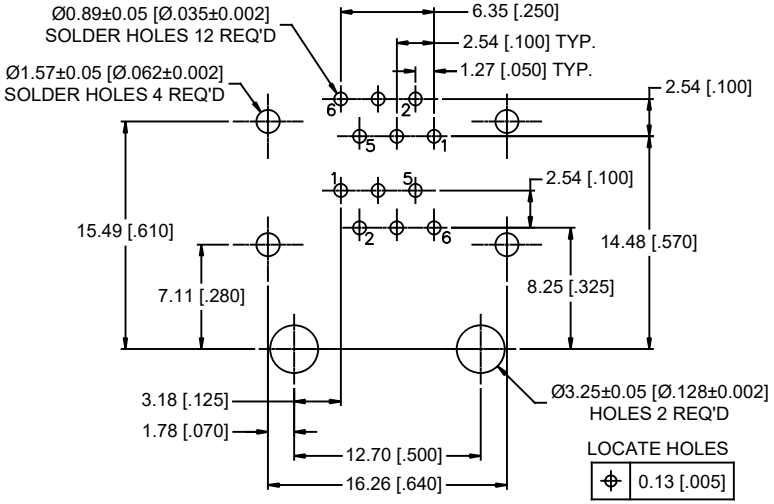


RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE OF PC BOARD

LOCATE HOLES

⌖	0.13 [.005]

HOLE DIMENSIONS
ARE BASIC

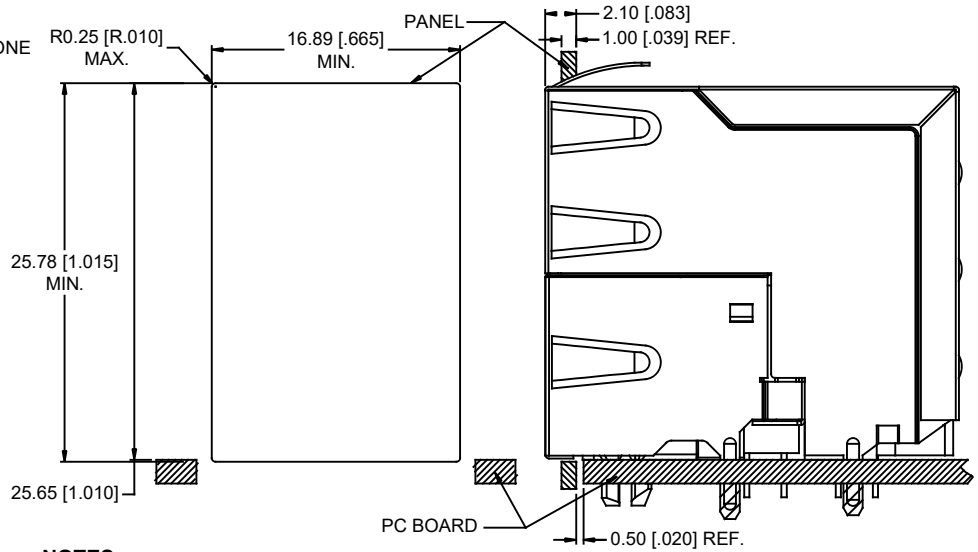

RECOMMENDED PANEL CUTOUT

NOTES:

1. MATERIALS:
   CONTACTS: PHOSPHOR BRONZE,
   PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES. SEE PART NO. FOR THICKNESS.
   50 MICRO" MIN. NICKEL OVERALL.
   100 MICRO" MIN. MATTE TIN OR GOLD FLASH ON TAILS.
   HOUSING: HIGH TEMPERATURE THERMOPLASTIC, FLAMMABILITY RATING UL 94V-0
   COLOR - BLACK.
   SHIELD: COPPER ALLOY
   PLATING: NICKEL WITH TIN DIPPED PCB TAILS.

2. RECOMMENDED SOLDERING TEMPERATURE:
   WAVE SOLDERING PEAKED AT 260°C FOR 5-8 SECONDS.

AMPHENOL PART NO.: RJSAE-X360-02

GOLD PLATING OPTION:
E = 6u" GOLD PLATING
H = 15u" GOLD PLATING
L = 30u" GOLD PLATING
7 = 50u" GOLD PLATING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE	DRAWN RONNIE.C	FEB08/22	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS MILLIMETERS	CHECKED KELVIN.T	FEB08/22	
SECONDARY INCHES	M.E. APP'D		STACKABLE 2X1 MODULAR JACK, 6 POSITION, 6 CONTACTS, SHIELD, NO LED, 0.100INCH CONTACT TAILS – RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		
1 DECIMAL PLACE	ENG. REL. NO.		DWG NO. P–RJSAE–X360–02 REV A
2 DECIMAL PLACES ±0.38	REF.		
3 DECIMAL PLACES	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 | DWG SIZE X | SCALE 4:1 | SHEET 1 OF 1
ANGULAR DEGREES ±1.5°			