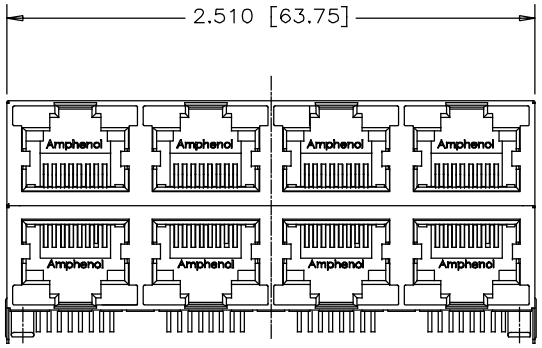
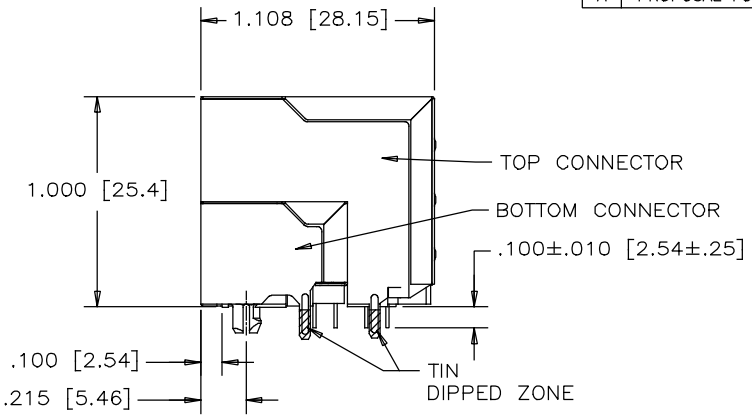

| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION, ECN, EAR NO. | DATE | APP'D |
| A | PROPOSAL FOR EAR# RJ19077 | JUN11/19 | L.CHAN |



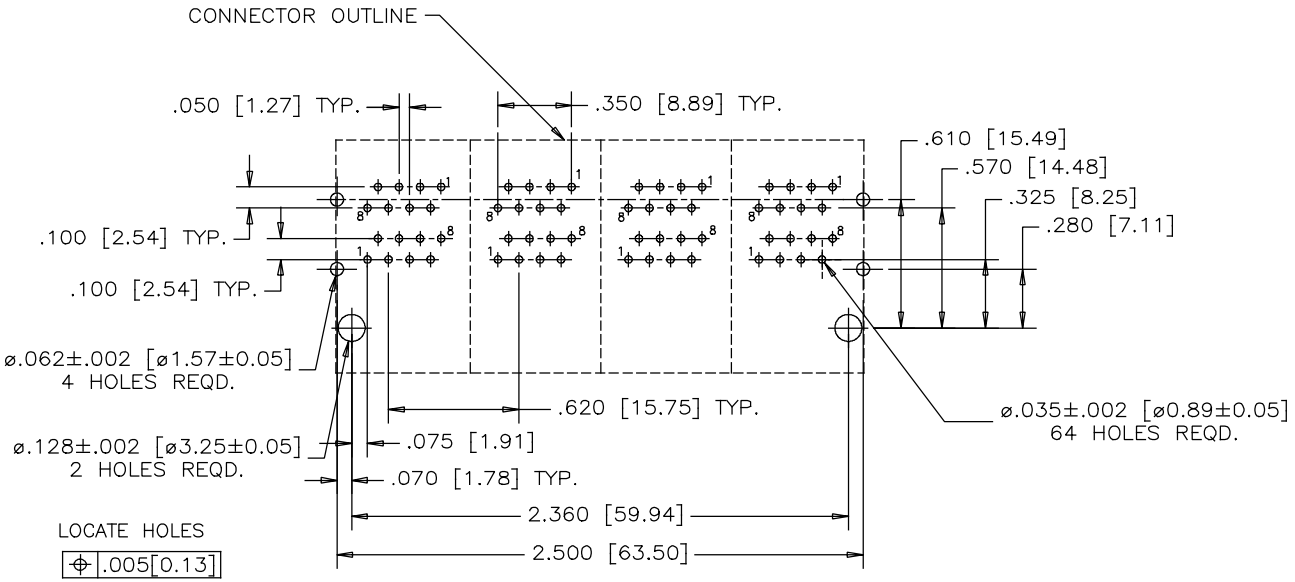

FRONT VIEW



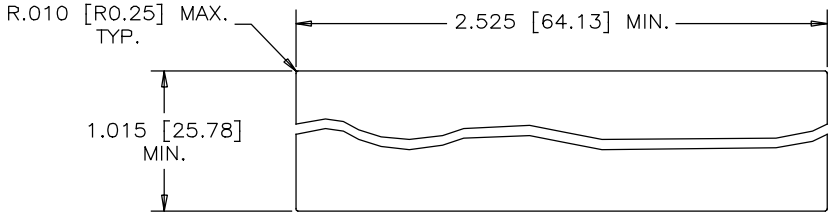

SIDE VIEW



BACK VIEW




P.C.B. HOLE LAYOUT
(COMPONENT SIDE OF BOARD)




RECOMMENDED PANEL LAYOUT

AMPHENOL CANADA CORP
RoHS COMPLIANT
2011/65/EU RECAST

MATERIALS:
HOUSING: ENGINEERING THERMOPLASTIC.
FLAMMABILITY RATING UL 94V-0

CONTACTS: PHOSPHOR BRONZE
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES. SEE PART NO. FOR THICKNESS.
50µ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE.
100µ" [2.54 MICRONS] MIN. MATTE TIN OR GOLD FLASH ON CONTACT TAILS.

SHIELD: COPPER ALLOY
PLATING: NICKEL WITH TIN DIPPED PCB TAIL.

UNLESS OTHERWISE SPECIFIED, THE TOLERANCE IS ±0.015[±0.38]

PART NUMBER: RJSAE-XF80-08

GOLD PLATING OPTION:
D=6u'' GOLD PLATING
G=15u'' GOLD PLATING
J=30u'' GOLD PLATING
5=50u'' GOLD PLATING

| | | |
|---|---|---|
| UNLESS SPECIFIED OTHERWISE | DRAWN RONNIE.C | JUN11/19 |
| PRIMARY UNITS INCHES | CHECKED L.CHAN | JUN11/19 |
| SECONDARY MILLIMETERS | M.E. APP'D | |
| REFERENCE IN PARENTHESES | Q.A. APP'D | |
| | DWG APP'D | |
| 1 DECIMAL PLACE | ENG. REL. NO. | |
| 2 DECIMAL PLACES | REF. EAR# RJ19077 | |
| 3 DECIMAL PLACES ±0.015 | THIRD ANGLE PROJECTION | DO NOT SCALE DRAWING |
| ANGULAR DEGREES ±1.5° | | |

Amphenol Canada Corp.
Commercial Products

TITLE: STACKABLE MULTI-PORT MODULAR JACK, 8 POS. 8 CONTACTS, SHIELDED WITHOUT TAB, WITH .100INCH CONTACT TAILS, -RoHS COMPLIANT

DWG NO. P-RJSAE-XF80-08 REV A

CODE ID NO. 03554 | DWG SIZE | SCALE | SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.