


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	SEP09/19	L.CHAN

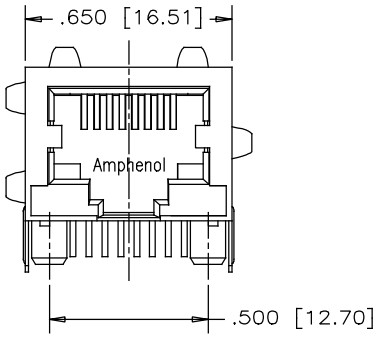


FRONT VIEW

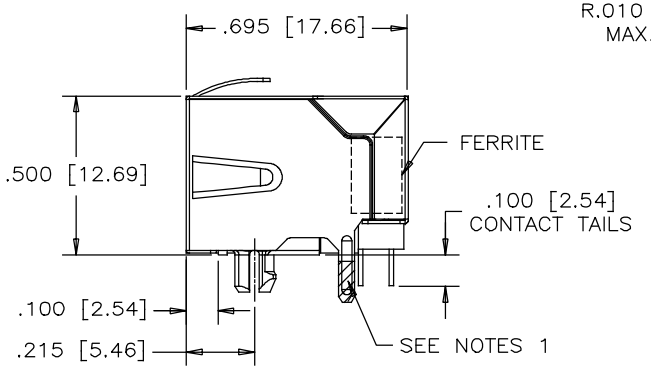


SIDE VIEW

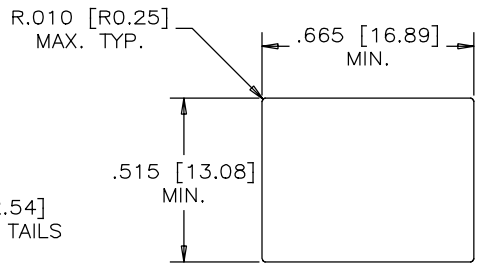

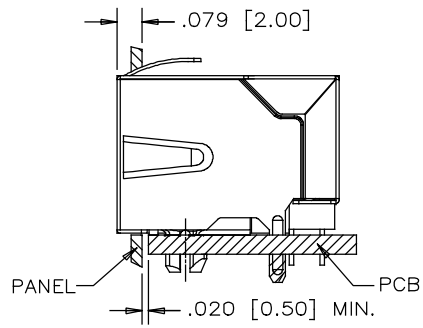

RECOMMENDED PANEL CUTOUT

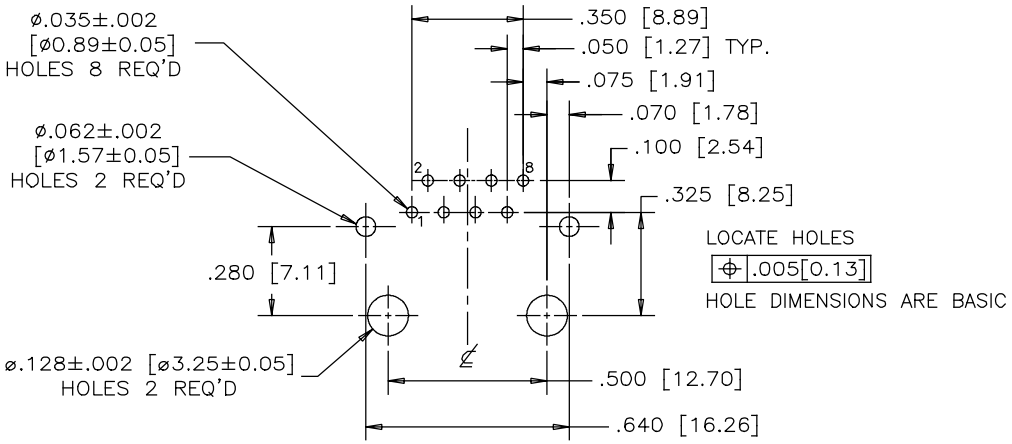

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

NOTES:

1. MATERIALS:

CONTACTS: PHOSPHOR BRONZE,
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES. SEE PART NO. FOR THICKNESS.
50 MICRO" MIN. NICKEL OVERALL.
100 MICRO" MIN. MATTE TIN OR GOLD FLASH ON TAILS.

HOUSING: ENGINEERING THERMOPLASTIC
COLOR – BLACK.
FLAMMABILITY RATING UL 94V–0

SHIELD: COPPER ALLOY
PLATING: NIVKEL WITH TIN FINISHED ON PCB TAILS.

2. RECOMMENDED SOLDERING TEMPERATURE

WAVE SOLDERING PEAKED AT 260°C MAX. FOR 5 SECONDS MAX.

AMPHENOL PART NO.: RJSBE–X280–C1

GOLD PLATING OPTION:
D = 6u" GOLD PLATING
G = 15u" GOLD PLATING
J = 30u" GOLD PLATING
5 = 50u" GOLD PLATING

AMPHENOL CANADA CORP. RoHS COMPLIANT 2011/65/EU RECAST

UNLESS SPECIFIED OTHERWISE	DRAWN RONNIE.C	SEP09/19	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS INCHES	CHECKED KELVIN.T	SEP09/19	SINGLE PORT MODULAR JACK, 8 POSITION, 8 CONTACTS, WITHOUT LED, WITH FRRITE, SHIELDED WITH TOP AND SIDE TABS, – RoHS COMPLIANT
SECONDARY MILLIMETERS	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D		
1 DECIMAL PLACE	ENG. REL. NO.		DWG NO. P–RJSBE–X280–C1 REV A
2 DECIMAL PLACES	REF.		
3 DECIMAL PLACES ±.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE X SCALE N/A SHEET 1 OF 1
ANGULAR DEGREES ±1.5°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.