


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	APR 12/17	L.CHAN

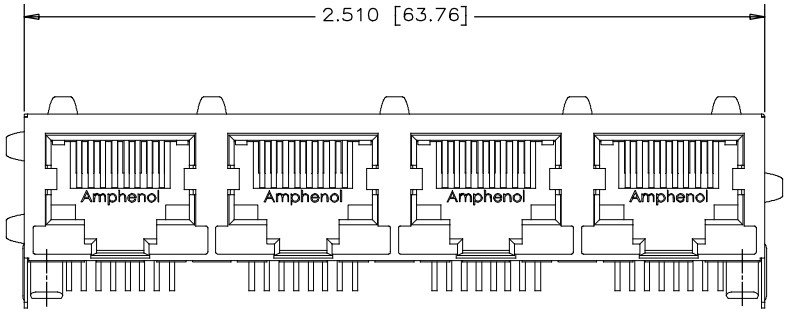


FRONT VIEW

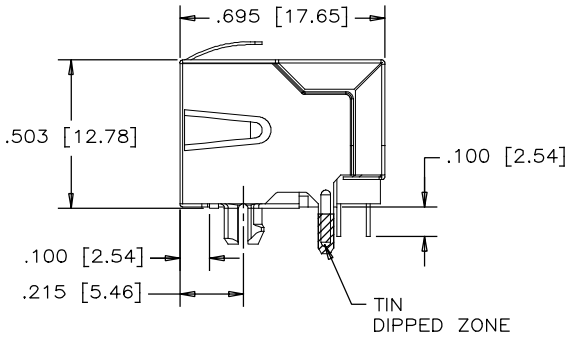

SIDE VIEW

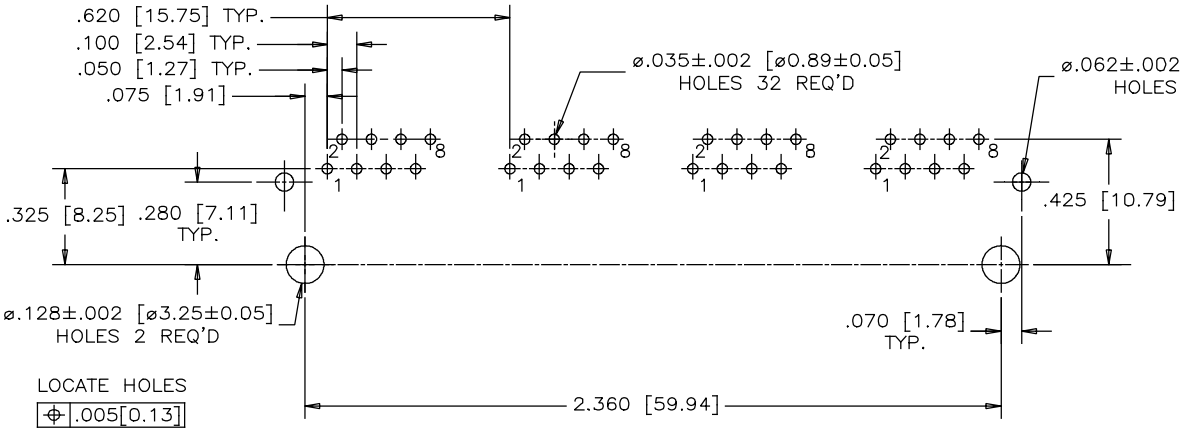

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

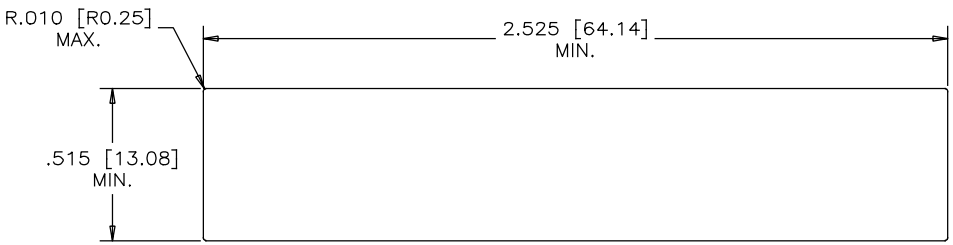

RECOMMENDED PANEL CUTOUT

MATERIALS:

CONTACTS: PHOSPHOR BRONZE,
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES SEE AMPHENOL PART NUMBER FOR DETAIL.
50 MICRO" MIN. NICKEL OVERALL.
100 MICRO" MIN. MATTE TIN OR GOLD FLASH ON TAILS.

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
COLOR – BLACK, FLAMMABILITY RATING UL 94V–0

SHIELD: COPPER ALLOY
PLATING: NICKEL WITH TIN DIPPED PCB TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING AT 260°C MAXIMUM FOR 10 SEC MAXIMUM

OPERATING TEMPERATURE: –40°C TO 85°C

PART NUMBER: RJSBE–X380–C4

GOLD PLATING OPTION:
D = 6u'' GOLD PLATING
G = 15u'' GOLD PLATING
J = 30u'' GOLD PLATING
5 = 50u'' GOLD PLATING

UNLESS SPECIFIED OTHERWISE	DRAWN Hanson.C	DATE APR 12/17	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS INCH	CHECKED LAWRENCE.C	APR 12/17	
SECONDARY MILLIMETER	M.E. APP'D		TITLE: 4 PORT MODULAR JACK,8 POSITION, 8 CONTACT, SHIELDED, WITHOUT LED, WITH .100[2.54] CONTACT LENGTH, – RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE ±0.025	ENG. REL. NO.		DWG. NO. P–RJSBE–X380–C4 REV A
2 DECIMAL PLACES ±0.020	REF.		
3 DECIMAL PLACES ±0.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1
ANGULAR DEGREES ±1.0°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.