

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	OCT 30/17	L.CHAN
B	REMOVE THE LED HOLE	NOV 13/17	L.CHAN




TOP VIEW


AMPHENOL CANADA CORP RoHS COMPLIANT 2011/65/EU RECAST




FRONT VIEW

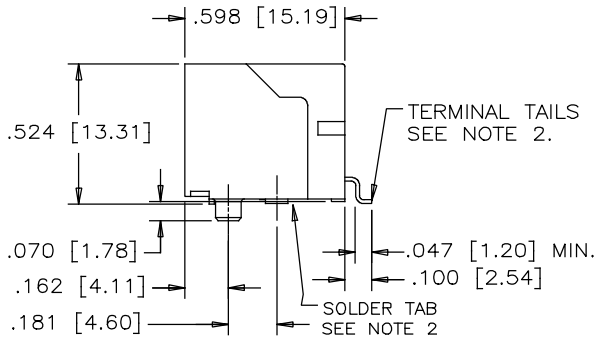

SIDE VIEW

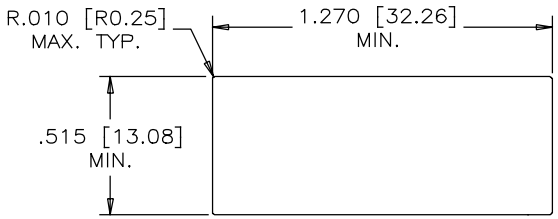

RECOMMENDED PANEL CUTOUT

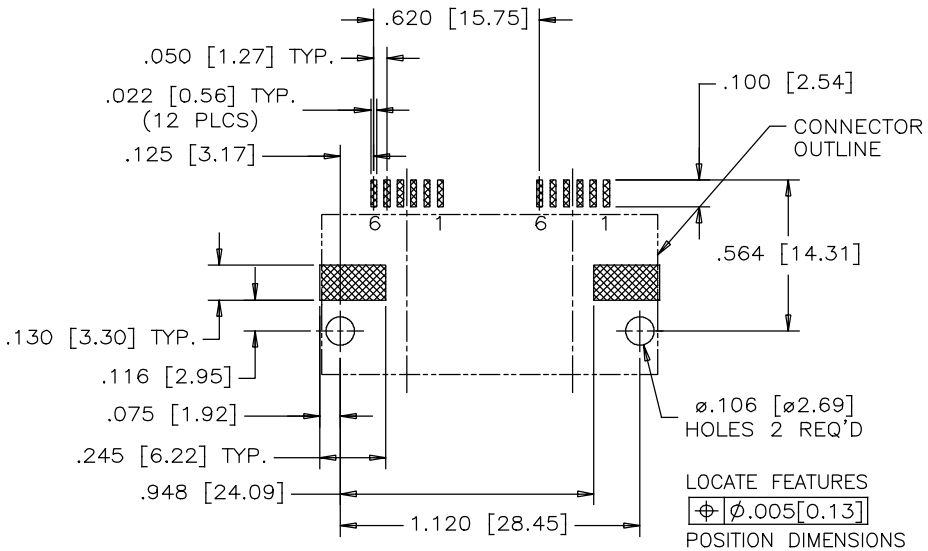

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)
TOLERANCE: ±0.05 [.002]

NOTES

1. MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0
COLOR:BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: 20 µ" [0.508 MICRONS]
MIN. GOLD ON MATING SURFACES.
50 µ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 µ" [2.54 MICRONS]
MIN. MATTE TIN OR GOLD FLASH
ON CONTACT TAILS.

SOLDER TAB: COPPER ALLOY WITH TIN PLATING.

2. COPLANARITY SPECIFICATION:
WITH THE MODULAR JACK SITTING ON A LEVEL SURFACE, THE MAXIMUM GAP BETWEEN THE LEVEL SURFACE AND ALL TERMINAL TAILS AND BOTH FITTING NAILS IS .004 [0.10].

AMPHENOL PART NUMBER: RJSSE-7060-02

UNLESS SPECIFIED OTHERWISE	DRAWN RONNIE.C	DATE OCT 30/17	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS INCH	CHECKED AMY.Z	OCT 30/17	
SECONDARY MILLIMETER	M.E. APP'D		TITLE: 2 PORTS SURFACE MOUNT JACK, UNSHIELDED, WITH HOLD DOWN BRACKET, 6 POSITION & 6 CONTACTS-RoHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE ±0.025	ENG. REL. NO.		DWG. NO. P-RJSSE-7060-02 REV B
2 DECIMAL PLACES ±0.020	REF.		
3 DECIMAL PLACES ±0.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1
ANGULAR DEGREES ±1.0°			

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.