

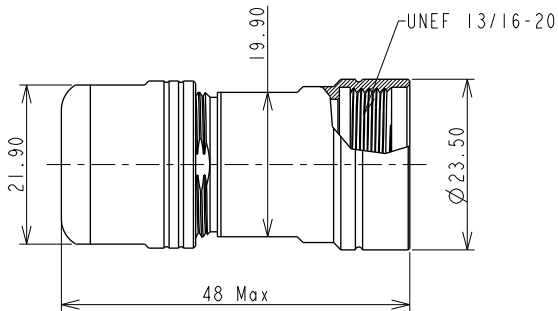
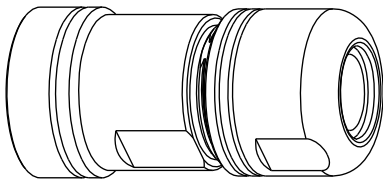
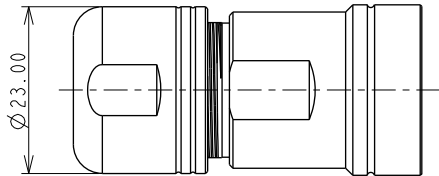


REVISIONS					
REV	ZONE	ECO	DESCRIPTION	DATE	BY
01	--	--	RELEASE NUMBER	10-Mar-10	APPR



TECHNICAL SPECIFICATION	
Material:	
Operating Temperature	From -40°C to +125°C
Crimp Cable Range	See Notes

Notes:
When * = 1,Crimp Cable Range 6~10.5mm
When * = 2,Crimp Cable Range 8.5~12.5mm

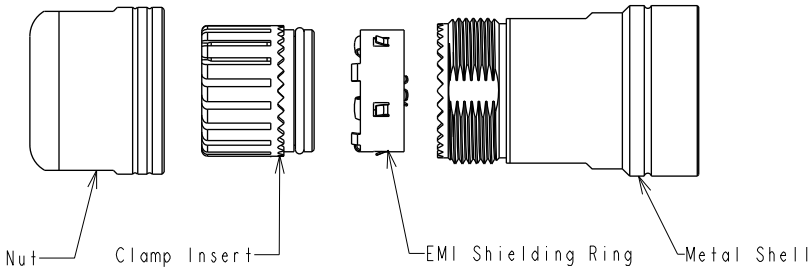

MATERIALS LIST									
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.10			MATERIAL SPECIFICATIONS:			SINE Systems Corporation A Subsidiary of Amphenol Corporation			
			PROCESS SPECIFICATIONS:			Back Shell ,Cord Grip ,Size 14			
签名 SIGNATURE			日期 DATE			DWG NO: RT0S-14CG-S*			
制图 DRAWN	TOM	10-Jan-10	THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.			第三角投影 THIRD ANGLE PROJECTION	文件编号 FSCM NO.	幅面 SIZE	质量 MASS
审核 CHECKED	POTER	15-Jan-10				比例 SCALE	版次 REV.	01	
工艺 ENGINEER									
批准 APPROVAL	FOUNT	15-Jan-10							
客户 CUSTOMER	CUSTOMER					SHEET 1 OF 1			