



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LENI7A0069~80	2017-10-12	Lingpeng	Add The Label And Change The Title
C	NI80019	2019-03-02	Peng	Add 5Pin
D	C230889	2023/06/15	He long	△D *1

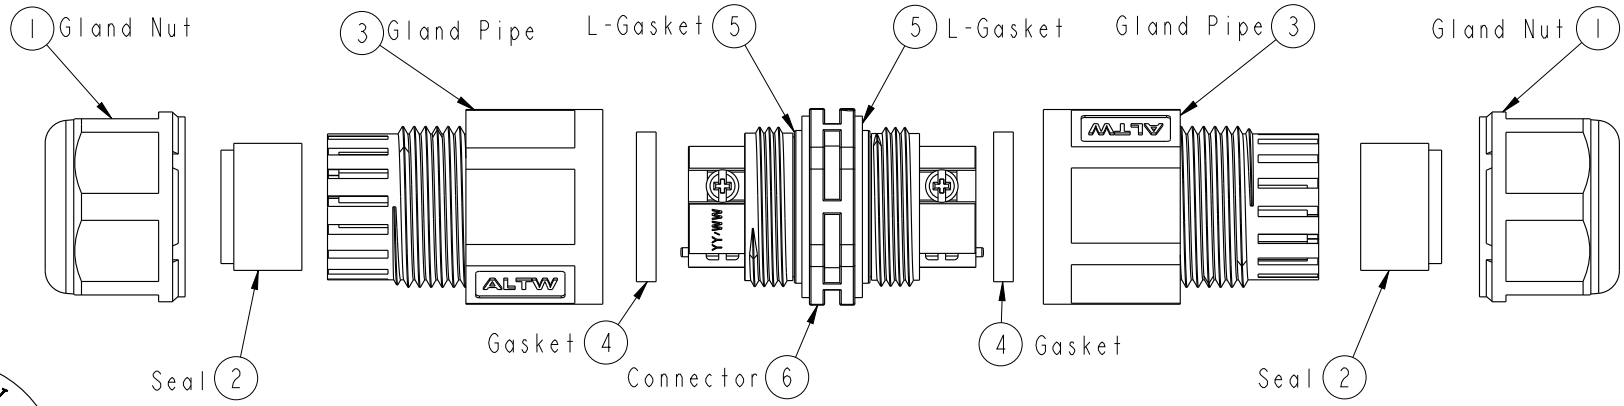


ALTW
CONFIDENTIAL
2019-03-02
R&D DEPT.

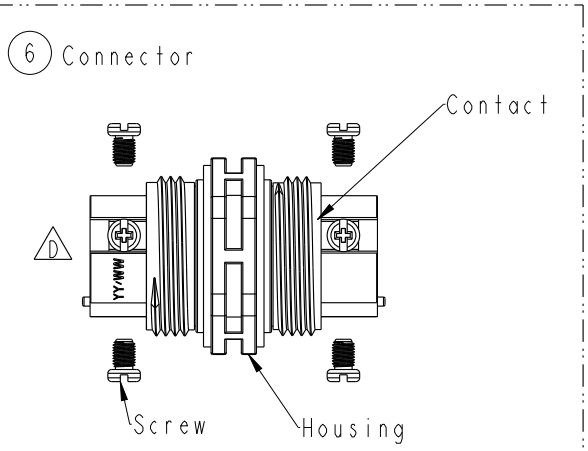

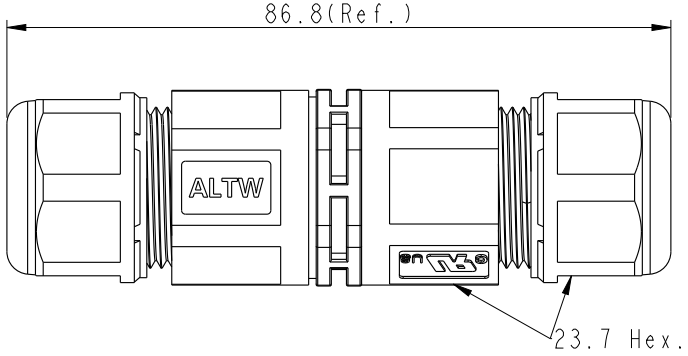



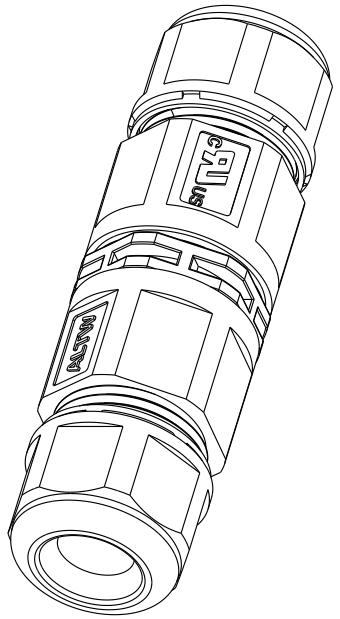


UNIT: mm	TITLE: △B ULII Cable Joiner Screw-in Type		Amphenol LTW 安費諾亮泰企業股份有限公司
TOLERANCE ±0.5mm	SCALE 1:1 / SIZE A4 / SHEET 1 OF 2		
	REV. D / WC-REV. .0	QC: Inspection item	


ITEM NO	DRAWN BY: Peng	DATE: 2019-03-02
DWG NO: SC-L-ULII-XX-XX	CHECKED BY: MaFei	DATE: 2019-03-02
CUSTOMER: ALTW	APPROVED BY: Jerry	DATE: 2019-03-02


WI0814-03-RM01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

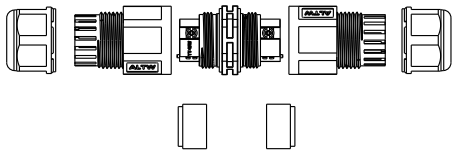

QTY: 1PCS

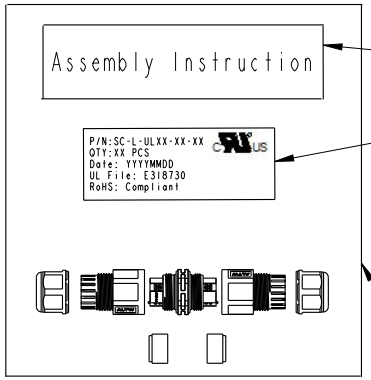

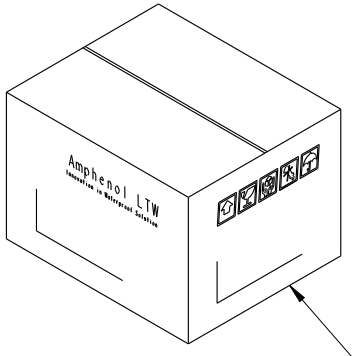

ALTW
CONFIDENTIAL
2019-03-02
R&D DEPT.

Both A Unassembled product And An Instruction Are In A PE Bag.
（將一套未組裝的產品和說明書，放置於一個PE袋，並封口）

SC-L-ULII-XX-XX

L:Cable Joiner


Type: ULII

Seal's Color: BL-Blue(藍色) For Cable Range: Ø4.5~Ø6.5mm
YW-Yellow(黃色) For Cable Range: Ø6.5~Ø8.5mm
GN-Green(綠色) For Cable Range: Ø8.5~Ø10.5mm
RD-Red(紅色) For Cable Range: Ø10.5~Ø12.5mm
C AA-All Seals For Cable Range: Ø4.5~Ø12.5mm


No. of Condutor: 02-2Poles
03-3Poles
04-4Poles
05-5Poles

Note: C
* QC Important Dimension To Check.
* Waterproof Rate: IP68 (50M,24H)
* Housing: PA66+GF, Black.
* Gland Nut: PA66, Black.
* Gland Pipe: PA66, Black.
* Contact: Brass, Nickel Plated
* Gasket & L-Gasket : Silicone, Yellow.
* Seal: Silicone, Blue & Yellow & Green & Red.
* Rated Voltage: 2~5 Pole 600V AC
* Rated Current: 2~4 Pole Max. 20A
  5 Pole Max. 10A
* Operating Temperature: -40°~+105°.
* Gland Pipe Recommended Tightening Torque: 8~10 Kgf.cm(0.78~0.98 N.m)
* Gland Nut Recommended Tightening Torque: 8~10 Kgf.cm(0.78~0.98 N.m)
* Seal For Cable OD: Ø4.5~Ø6.5mm, Blue.
  Ø6.5~Ø8.5mm, Yellow.
  Ø8.5~Ø10.5mm, Green .
  Ø10.5~Ø12.5mm, Red.
* Screws for Wire connection recommended tightening torque: 2.00~4.50kgf.cm / 0.196~0.44 N.m
* Applicable Wire gauge: 2~4 Pole:18AWG ~ 12AWG
  5 Pole:20AWG ~ 16AWG
* UL2238 Certification


Pole Assignments Front View



2 Pole



3 Pole



4 Pole



5 Pole

UNIT:mm	TITLE: B ULII Cable Joiner Screw-in Type		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY: Peng / DATE: 2019-03-02
TOLERANCE ±0.5mm	SCALE: 1:1 / SIZE: A4 / SHEET: 2 OF 2			DWG NO: SC-L-ULII-XX-XX	CHECKED BY: MaFei / DATE: 2019-03-02
	REV: D / WC-REV: .0	QC: Inspection item		CUSTOMER: ALTW	APPROVED BY: Jerry / DATE: 2019-03-02

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.