
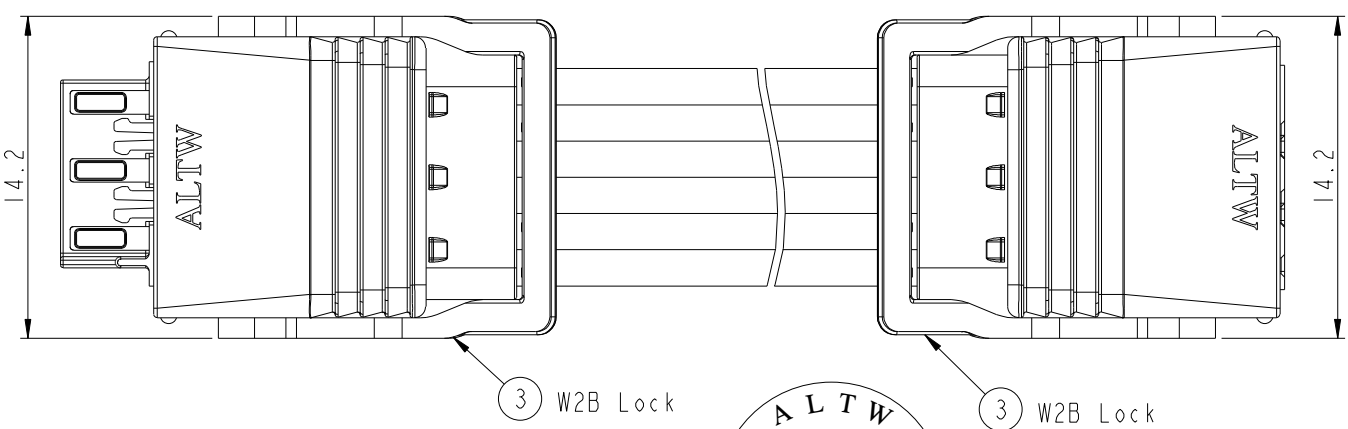
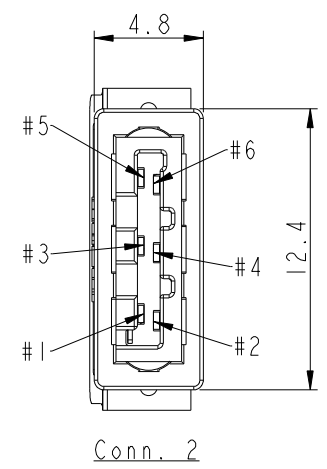
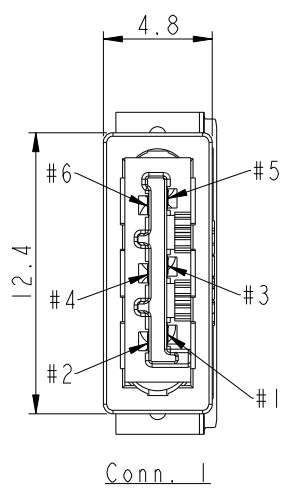
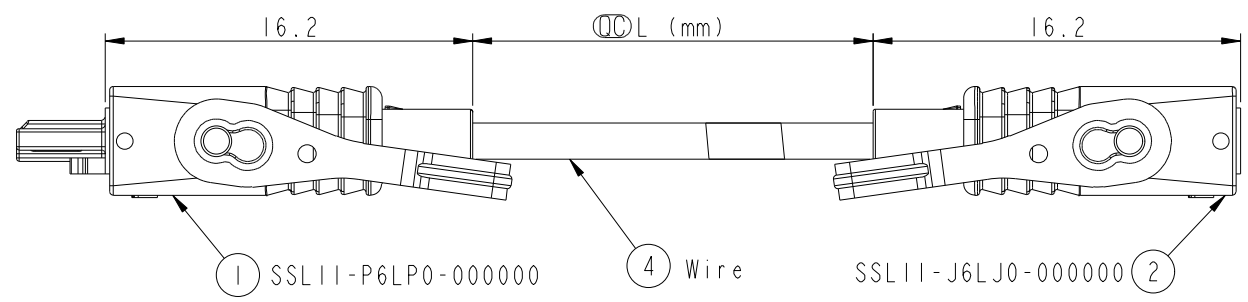


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014-02-12	Fisher	Initial Release



6	Blue	藍	6
5	Green	綠	5
4	Yellow	黃	4
3	Orange	橙	3
2	Red	紅	2
1	Brown	棕	1
Conn. 1	Wire Color	Conn. 2	
Pin Out			

SSL11-P6LJP-D22AXX

- 01: L=100±20 mm.
- 02: L=200±20 mm.
- 04: L=400±25 mm.
- 99: L=9900±5% mm
- Wire Length Range(L): 100~9900mm
- 22: 22AWG
- LOCK&LATCH OPTION
- D: TWO W2B LOCK



- Notes:
- * $\varnothing$ Important Dimensions To Check.
 - * Housing: Thermoplastic, UL94V-0, Natural White.
 - * Terminal: Copper Alloy, Gold Plated.
 - * Hood: Thermoplastic, UL94V-0, Natural White.
 - * SR Mold: PP, UL94V-0, Natural White.
 - * W2B Lock: Thermoplastic, UL94V-0, Natural White.
 - * Wire: UL1430 22AWG, Brown/Red/Orange/Yellow/Green/Blue.
 - * Wire Length Tolerance: ±5%mm.

UNIT:mm		TITLE
TOLERANCE	±0.5 mm	SSL11 WIRE ASS'Y, TWO W2B LOCK 6-POS, PLUG TO JACK
SCALE	3:1	SIZE A4
REV.	A	WC-REV. A.1
SHEET 1 OF 1		
QC: Inspection item		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	SSL11-P6LJP-D22AXX	Fisher_Wang
CUSTOMER	ALTW	Ivan_Lin
APPROVED BY		Kevin_Hu
		2014-02-12