

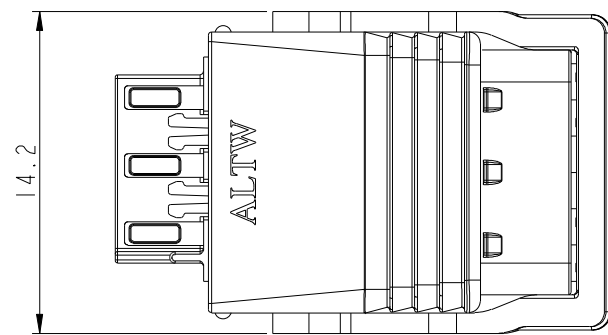
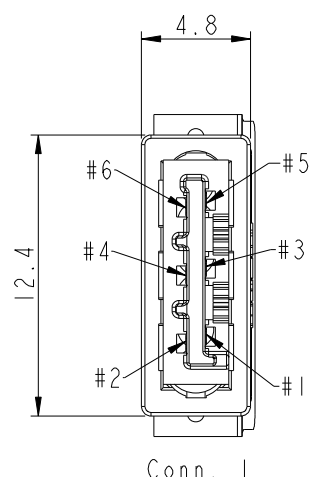


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014-02-11	Fisher	Initial Release

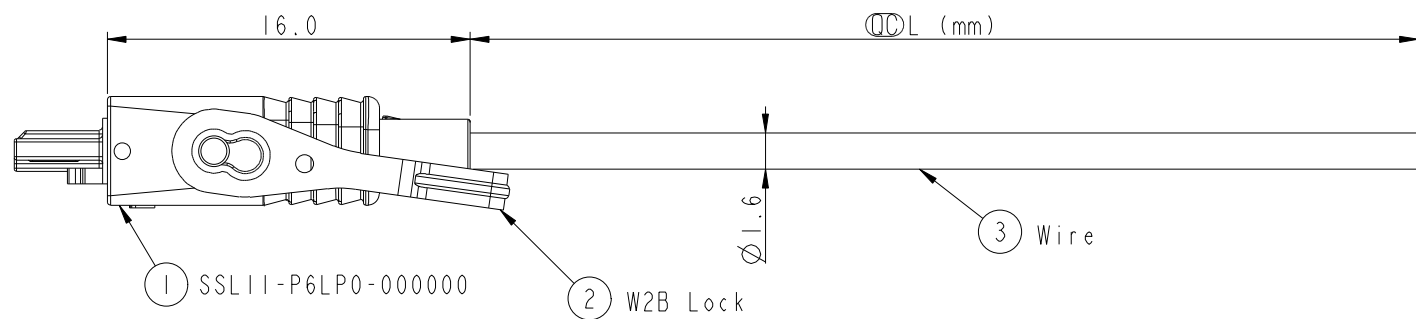

Blue
Green
Yellow
Orange
Red
Brown

6	Blue	藍
5	Green	綠
4	Yellow	黃
3	Orange	橙
2	Red	紅
1	Brown	棕
Conn. 1	Wire Color	

SSLII-P6LP0-B22AXX

01: L=100±20 mm.
02: L=200±20 mm.
04: L=400±25 mm.
Standard Length is 400mm
Wire Length Range(L): 100~9900mm
22: 22AWG
LOCK&LATCH OPTION
B: WITH W2B LOCK

Notes:
* (C) Important Dimensions To Check.
* Housing: Thermoplastic, UL94V-0, Natural White.
* Terminal: Copper Alloy, Gold Plated.
* Hood: Thermoplastic, UL94V-0, Natural White.
* SR Mold: PP, UL94V-0, Natural White.
* W2B Lock: Thermoplastic, UL94V-0, Natural White.
* Wire: UL1430 22AWG,
Brown/Red/Orange/Yellow/Green/Blue.
* Wire Length Tolerance: ±5%mm.

UNIT:mm		TITLE SSLII WIRE ASS'Y, WITH W2B LOCK 6-POS, PLUG TO OPEN
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 3:1	SIZE A4
	REV. A	SHEET 1 OF 1
	WC-REV. A.9	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Fisher_Wang	DATE 2014-02-11
DWG NO SSLII-P6LP0-B22AXX	CHECKED BY Ivan_Lin	DATE 2014-02-11
CUSTOMER ALTW	APPROVED BY Kevin_Hu	DATE 2014-02-11