

| H20 SERIES

2" SOLID SHAFT INCREMENTAL ENCODERS - ORDINARY & HAZARDOUS LOCATIONS

The Model H20 is a compact encoder designed to economically fill the resolution range up to 10,000 cycles per turn. This compact unit features a precision disc, precision ball bearings and EMI shielding. The encoder meets IP66 sealing requirements when ordered with the shaft seal and one of the available connectors.

GEN²

For **Generation 1**
datasheet [click here](#).



Features

- Compact size to fit in tight installations
- Well-sealed for dusty and wet environments
- Shielded against EMI
- Reverse voltage protection
- Over voltage protection
- Output protection diode
- Any resolution from 1 to 10000 is available
- Certifications in Hazardous Locations: Intrinsically Safe UL/Atex/IECEx

Applications

- Machine control
- Process control and automation
- Agricultural machinery
- Robotics
- Food processing
- Metering operations

SPECIFICATIONS

Mechanical

Material		Cover: Die cast Aluminum with Iridite finish Body: Aluminum Shaft: AISI 303 Stainless Steel
Bearings		High precision ball bearings, Material: Chrome steel; shielded bearings standard, sealed bearings optional
Maximum Loads	Axial	40 pounds
	Radial	35 pounds
Shaft inertia		$4,1 \times 10^{-4}$ oz-in-sec ²
Torque		1,0 in-oz (max) without shaft seal 2,5 in-oz (max) with shaft seal
Permissible Max. Speed		10 000 RPM
Continuous Max. Speed		6 000 RPM
Encoder Weight (Approx.)		9 oz typical
Theoretical Mechanical Lifetime (F_{axial} / F_{radial})		2×10^8 revs (1300 hrs at 2 500 RPM) at rated load, 1×10^{10} revs (67 000 hrs at 2 500 RPM) at 10% of rated load

Electrical

Certification	CENELEC Classification	Electronic	Output Signals ^{(4) (5)}	Operating Voltage +V	Supply Current (no loads)	Current per Channel	Short Circuit Proof	Overvoltage protection	Reverse Polarity Tolerant	Frequency Capability	Resolutions category ⁽¹⁾	Operating Temperature Range ^{(2) (3)}
Ordinary Location + Non-Incendive	Ex ec IIC T4 Gc Ex ec IIC T3 Gc	28/V	HTL	4,75-30V	<75mA	<40mA	Yes	Up to 33V	Yes	Up to 1MHz	Standard	-40°C..
											Low	+100°C
											High	-40°C.. +80°C
		28/O	Open Collector	4,75-30V	<75mA	<40mA	Yes	Up to 33V	Yes	Up to 300kHz	Standard	-40°C..
											Low	+100°C
											High	-40°C.. +80°C
		28/5	TTL	4,75-30V	<75mA	<40mA	Yes (Except to +V)	Up to 33V	Yes	Up to 1MHz	Standard	-40°C..
											Low	+100°C
											High	-40°C.. +80°C
Intrinsically safe	Ex ia IIC	5/V	TTL	4,5-6V	<75mA	<40mA	Yes	Up to 6,8V	Yes	Up to 1MHz	Standard	-40°C..
											Low	+80°C
											High	-40°C.. +80°C
		5/O ⁽⁶⁾	Open Collector	4,5-6V	<75mA	<40mA	Yes	Up to 6,8V	Yes	Up to 300kHz	Standard	-40°C..
											Low	+80°C
											High	-40°C.. +80°C
	Ex ia IIB	9/V	HTL	8-12V	<75mA	<40mA	Yes	Up to 16V	Yes	Up to 1MHz	Standard	-40°C..
											Low	+80°C
											High	-40°C.. +80°C
		9/O ⁽⁶⁾	Open Collector	8-12V	<75mA	<40mA	Yes	Up to 16V	Yes	Up to 300kHz	Standard	-40°C..
											Low	+80°C
											High	-40°C.. +80°C

⁽¹⁾ See resolutions section for details.

⁽²⁾ Surface encoder temperature

⁽³⁾ UL Listed: -20°C +80°C. Device must be supplied by a Class 2, LPS or SELV limited energy source 250mA.

⁽⁴⁾ Complementary outputs are recommended for use with line driver type (source/sink) outputs. When used with differential receivers, this combination provides a high degree of noise immunity.

⁽⁵⁾ - Output IC's are available as either Line Driver or NPN Open Collector types. Open Collectors require external pull-up resistors, resulting in higher output source impedance (sink impedance is similar to that of line drivers). In general, use of a Line Driver style output is recommended. Line Drivers source or sink current and their lower impedance mean better noise immunity and faster switching times.

Warning: do not connect any line driver outputs permanently to 0V,+V or to any other signal. This may overtime damage the driver. Unused outputs should be isolated and left floating.

Our applications specialists would be pleased to discuss your system requirements and the compatibility of your receiving electronics.

These IS encoders must be installed per Control Drawing 08292-001.

⁽⁶⁾ Output IC's NPN Open Collector are also available with internal 2,7K ohm pull-up resistors : 5/OR or 9/OR

Environmental

Shocks (EN 60068-2-27)	≤ 1000 m.s-2 (during 5 ms)
Vibrations (EN 60068-2-6)	≤ 300 m.s-2 (50...2 000Hz)
EMC	EN 61000-6-2, EN 61000-6-4
Isolation	1 000V eff
Operating Temperature ⁽¹⁾	See Electrical table above
Storage Temperature	-40°C ... +100°C
Protection (EN 60529)	IP 65 IP66 when ordered with shaft seal (on units with an MS connector) or a cable gland (on units with cable termination).
Humidity	93% RH non-condensing at 20 °C



⁽¹⁾ Extended temperature ratings : some models can operate down to -55°C. Extended temperature ranges can affect other performance factors. Consult with factory

DIMENSIONS


Dimensions in inches

H20DB SQUARE FLANGE

(WITH STANDARD 3/8" SHAFT AND SM18 CONN.)

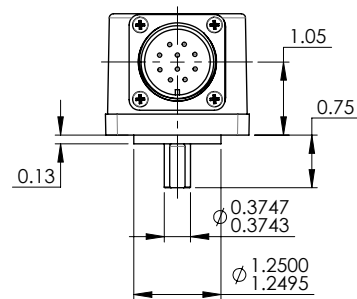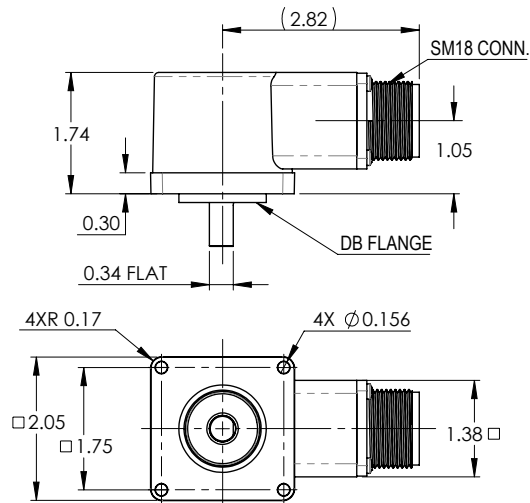


H20DA SQUARE FLANGE

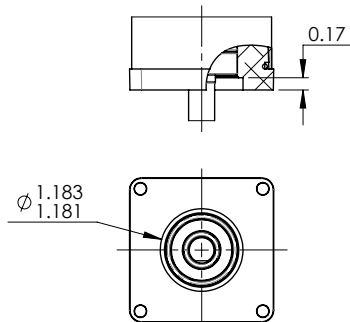


OPTIONAL FACEMOUNTS

4X#6-32X.25 DP
EQUALLY SPACED




F5
(DA OR DB FLANGE ONLY)

4X#10-32X.25 DP
EQUALLY SPACED



F12



3X#4-40X.25 DP
EQUALLY SPACED




F28

H20EB SERVO FLANGE


(WITH OPTIONAL F28 FACEMOUNT AND EM18 CONN.)

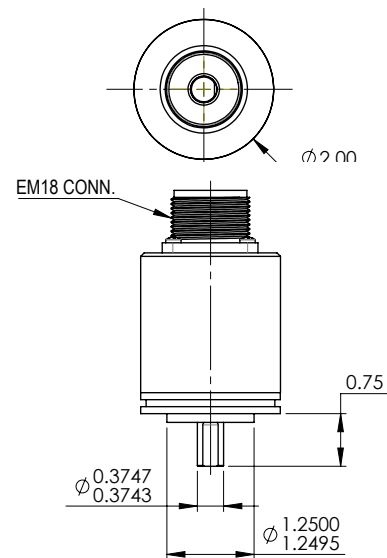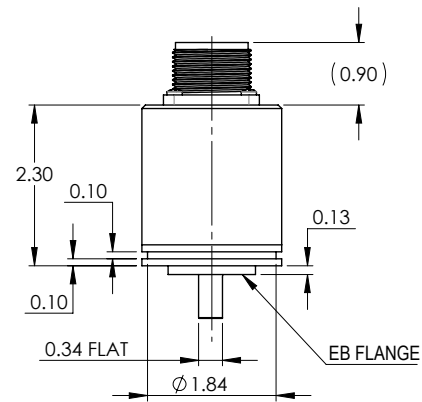

H20EA SERVO FLANGE




CONNECTOR OPTIONS

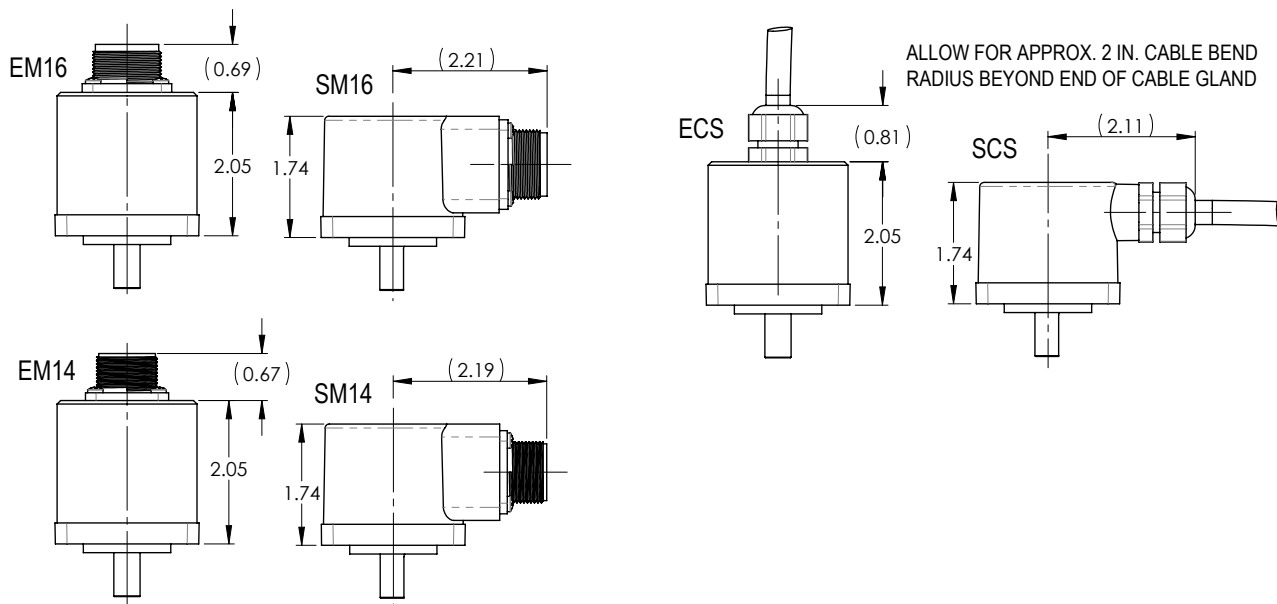


SHAFT VARIATIONS AVAILABLE:



H20EB-HS FRONT CLAMP
H20EB-B

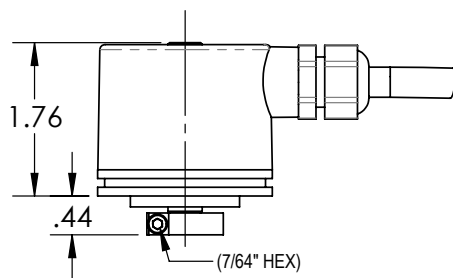


H20EB-HS REAR CLAMP

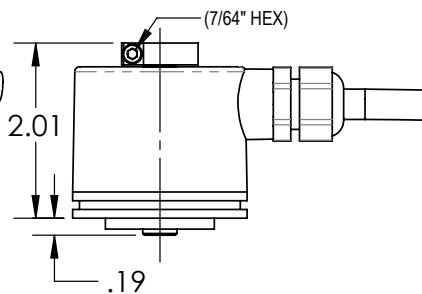


H20DB-37TS

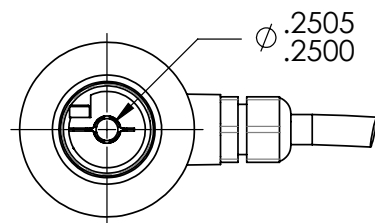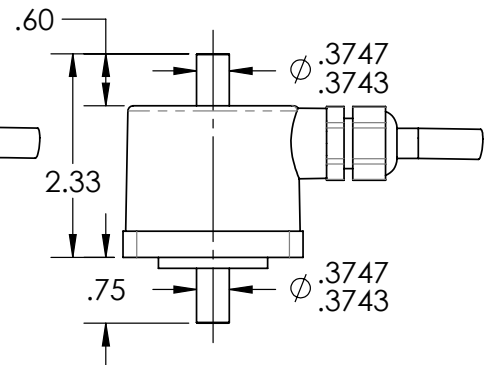

H20EB-HS BORE IS THRU
H20EB-B BORE IS .85 DP
FROM END OF SHAFT

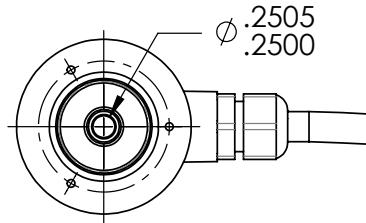

H20EB-HS REAR
SHOWN WITH OPTIONAL
F28 FACEMOUNT

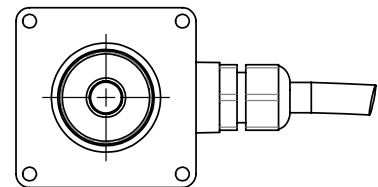

STANDARD CONNECTIONS

		0V	+V	A	B	Z	A/	B/	Z/	Case Ground	Shield Drain
M18	M18 Connector 10 Pins	F	D	A	B	C	H	I	J	G	—
M14 - ABZ	M14 Connector 6 pins	A	B	E	D	C	—	—	—	—	—
M14 - ABC		A	B	E	D	—	C	F	—	—	—
M16 - ABZ	M16 Connector 7 Pins	F	D	A	B	C	—	—	—	G	—
M16 - ABC		F	D	A	B	—	C	E	—	G	—
K8	M12x1 Metric Connector 8 Pins	7	2	1	4	6	3	5	8	—	—
CABLE - ABZ	PVC Cable 9 Wires	BK (Black)	RD (Red)	YE (Yellow)	BU (Blue)	OG (Orange)	—	—	—	GR (Green)	WH (White)
CABLE - ABC		BK (Black)	RD (Red)	YE (Yellow)	BU (Blue)	—	WH/YE (White/Yellow)	WH/BU (White/Blue)	—	GR (Green)	WH (White)
CABLE - ABZC		BK (Black)	RD (Red)	YE (Yellow)	BU (Blue)	OG (Orange)	WH/YE (White/Yellow)	WH/BU (White/Blue)	WH/OR (White/Orange)	GR (Green)	WH (White)

RESOLUTIONS

Standard resolutions:

Any resolution within the 1-2500ppr range.


Higher resolutions⁽¹⁾:

Any resolution within 2500-10000ppr range. Consult factory.

⁽¹⁾ Signal tolerances available in Instructions Manual

⁽²⁾ Non-standard index widths are available. Consult factory.

Channel Synchronization⁽²⁾

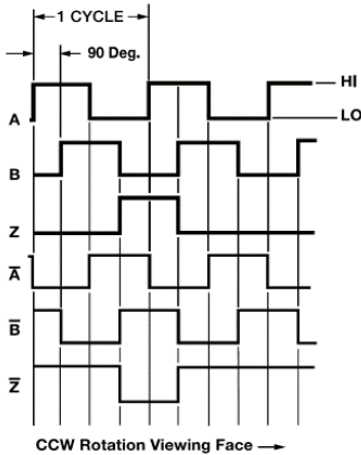

ORDERING OPTIONS Example : H20DB-37-SS-1024-ABZC-28/V-SM18

ORDERING OPTIONS Example : H20DB-37-SS-1024-ABZC-28/V-SM18


[illegible]

AGENCY APPROVALS & AVAILABLE CERTIFICATIONS

Special Models of the H20 Incremental Encoder are available with one or more of the following certifications. Consult with factory in order to ensure how to correctly specify the agency approval(s) that you require.

Hazardous Area Ratings	Agency		Ratings and Markings (for all standard product configurations)	File Number
Blank		CE	EN 55011: Electromagnetic Disturbance (EMI) EN 61000-6-2: Electromagnetic Compatibility (EMC)	-
EX Intrinsic Safety		UL	Class I, Groups A, B, C, D Class II, Groups E, F, G	E78446
		DEMKO	Ex II 1 G Ex ia IIC T4 Ga (9V/0 is II 1 G Ex ia IIB T4 Ga)	DEMKO 06 ATEX 041424X
		IEC/IECEx	Ex ia IIC T4 Ga (9V/0 is Ex ia IIB T4 Ga) -40°C ≤ Ta ≤ +85°C	IECEx UL 12.0035X
NI Non-Incendive		UL	Class I, Div. 2, Groups A, B, C, D	E78446
		DEMKO	Ex II 3 G Ex ec IIC T3 Gc	DEMKO 25 ATEX 3400X
		IEC/IECEx	Ex ec IIC T3 Gc -40°C ≤ Ta ≤ +85°C	IECEx UL 25.0048X



Description	Part Number	Description	Part Number
Flexible shaft couplings 	39074-12-12 = 3/8 to 3/8 39074-12-8 = 3/8 to 1/4 39074-8-8 = 1/4 to 1/4	Connector cable assemblies 	31186-1810 = M18, 10pin, 10 ft length 31186-1820 = M18, 10pin, 20 ft length 31186-1850 = M18, 10pin, 50 ft length 31186-1610 = M16, 7pin, 10 ft length 31186-1620 = M16, 7pin, 20 ft length 31186-1650 = M16, 7pin, 50 ft length 31186-1410 = M14, 6pin, 10 ft length 31186-1420 = M14, 6pin, 20 ft length 31186-1450 = M14, 6pin, 50 ft length
Adapter plates 	38228-001 = Aluminum 38228-002 = Delrin		
Servo clamps 	31165-001 = 0.093 grip 31165-002 = 0.125 grip	Connector mates 	MS3106F18-1S = Mates to standard M18 style, 10pin conn. MS3106F16S-1S = Mates to standard M16 style, 7pin conn. MS3106F14S-6S = Mates to standard M14 style, 6pin conn.
High load bearing assemblies 	11008-000 = H20 and H25 flange mount 11009-001 = H25 foot mount 11009-002 = H20 foot mount	Bulk encoder cable 	37048-003-100 = 100 ft spool 37048-003-500 = 500 ft spool 37048-003-1000 = 1K ft spool
12 in. OD Measuring wheels 	31196-001 = 3/8in. Bore 31196-002 = 1/2in. Bore 31196-003 = 5/8in. Bore	Electronic Modules 	60001-010 = Opto isolator 60011-001 = Broadcaster 60002-000 = Encoder tester *There are many options for Electronic modules, consult factory for help selecting the best one for your application
		Intrinsic Safety Barrier 	This galvanically isolated barrier provides both power and signal isolation for an incremental encoder. With differential line driver outputs, it can carry signals up to 500 feet with a bandwidth of up to 250 kHz. For detailed ordering options, refer to accessory specification sheet.

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates ("Sensata") are solely intended to assist third parties ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice.

Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas

+1 (800) 350 2727 – Option 1
sales.beisensors@sensata.com

Europe, Middle East & Africa

+33 (3) 88 20 8080
position-info.eu@sensata.com

Asia Pacific

sales.isasia@list.sensata.com
 China +86 (21) 2306 1500
 Japan +81 (45) 277 7117
 Korea +82 (31) 601 2004
 India +91 (80) 67920890
 Rest of Asia +886 (2) 27602006
 ext 2808