




Automotive Parts > Automotive Connector Accessories > Automotive Connector Caps & Covers

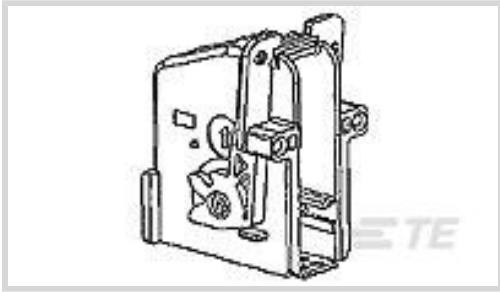

Number of Positions: **18**
Primary Product Color: **Black**
Protection & Strain Relief Accessory Type: **Shield Assembly**
Primary Product Material: **PBT GF**
Cable Exit Angle: **180°**

Features

Product Type Features

Sealable	No
Protection & Strain Relief Accessory Type	Shield Assembly

Configuration Features

Number of Positions	18
---------------------	----

Body Features

Primary Product Color	Black
Primary Product Material	PBT GF
Cable Exit Angle	180°

Mechanical Attachment

Strain Relief	Without
---------------	---------

Dimensions

Compatible Cable Bundle Diameter Range	4.3 mm[.169 in]
--	-----------------

Usage Conditions

Operating Temperature (Max)	120 °C[248 °F]
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]

Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Packaging Features



Packaging Method	Carton
------------------	--------

Other

Serviceable	Yes
-------------	-----

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1355348-1
18POS MQS REC




TE Part # 1-1355154-1
MQS STIFTWANNE 18P



TE Part # 1-1355349-1
MQS ABDECKKAPPE 18P

Customers Also Bought



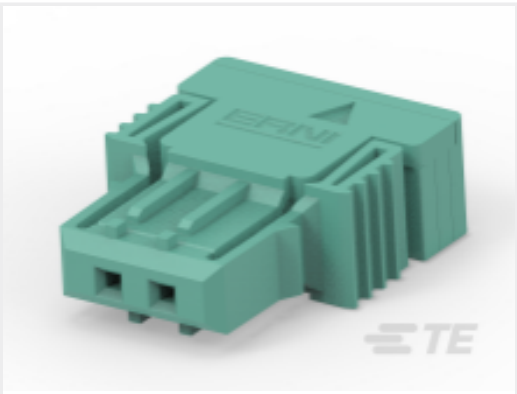

TE Part #364200-E
SRCBUG A 2,54 2 2 CSI 164 E1 ADV J 2 324



TE Part #223839-E
STVC 64 F AC VV 7-00 TL 4,0 * 247 E007 1



TE Part #CV7366-000
222K121-25L-0




TE Part #1-962692-2
18POS MQS TAB COD C-F



TE Part #1-1355154-1
MQS STIFTWANNE 18P




TE Part #1-1670920-1
8POS, MCON 1.2 LL REC SEALED

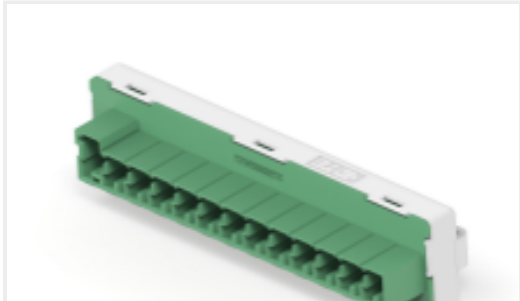

TE Part #2-2138685-5
27pos MQS .63 header 180deg



TE Part #2373242-1
CVTY PLUG,2.8 APEX FCI,CVTY DIA, MAT-SL

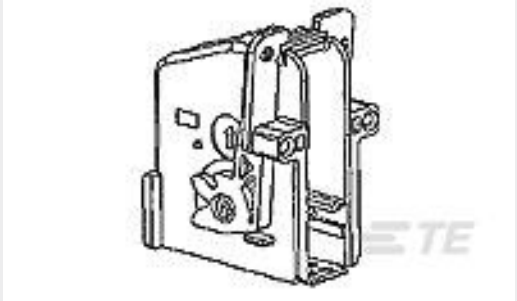

TE Part #2-1355350-1
MQS COVER 18POS



TE Part #2362764-6
MATENET,CABLE ASSY,1 GBPS UTP

Documents

Product Drawings
MQS ABDECKKAPPE 18P

English

CAD Files
3D PDF

English

Customer View Model
ENG_CVM_1-1355350-1_A1.2d_dxf.zip

English

Customer View Model
ENG_CVM_1-1355350-1_A1.3d_igs.zip

English

Customer View Model
ENG_CVM_1-1355350-1_A1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

1-1355350-1

18 Position, Black, Shield Assembly, PBT GF, 180° Cable Exit, -40 – 120 °C [-40 – 248 ° F]



Micro Quardlok System Female Connectors

English

Product Specification

English