



Connectors > RF Connectors > Coax Connectors



RF Interface: **SMA**
RF Connector Style: **Plug**
RF Connector Mated Outer Diameter (Approximate): **6.35 mm [.25 in]**
Impedance: **50 Ω**
RF Connector Coupling Mechanism: **Screw**

Features

Product Type Features

Connector Seal & Plug Type	Gasket
Connector Product Type	Connector Assembly
RF Interface	SMA
RF Connector Style	Plug
Connector System	Cable-to-Board
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	1
Number of Coaxial Contacts	1

Electrical Characteristics

Impedance	50 Ω
-----------	------

Body Features

Body Material	Stainless Steel
Body Plating Material	Gold

Contact Features

RF Connector Contact Configuration	Not Captivated
RF Connector Center Contact Underplating Material	Copper



RF Connector Center Contact Plating Material	Gold (Au)
RF Connector Center Contact Material	Brass

Termination Features

Termination Method to Wire & Cable	Solder
------------------------------------	--------

Mechanical Attachment

RF Connector Coupling Mechanism	Screw
Connector Mounting Type	Panel Mount
RF Contact Captivation Method	Mechanical
Detent	Without

Housing Features

Body Orientation	Straight
------------------	----------

Dimensions

Product Length	11.2 mm[.442 in]
RF Connector Mated Outer Diameter (Approximate)	6.35 mm[.25 in]

Usage Conditions

Operating Temperature Range	-65 – 165 °C[-85 – 329 °F]
-----------------------------	----------------------------

Operation/Application

Operating Frequency Range	18 GHz
---------------------------	--------

Packaging Features

Packaging Quantity	100
Packaging Method	Box

Other

Coupling Nut Plating Material	Gold
Gasket Material	Silicone Rubber
Grade	Professional
Coupling Nut Base Material	Stainless Steel
Dielectric Material	Polytetrafluoroethylene (PTFE)

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
------------------------------	---------------------------



EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) SVHC > Threshold: Pb (4% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-1478968-0
SMA PNL SKT LNCH STUB 4/FLNG
GSS NCC



TE Part # 1-1478966-0
SMA B/HD SKT RCPT GSS



TE Part # 1-1478963-0
SMA PNL SKT RCPT, 2/FLNG GSS



TE Part # 1057290-1
3052 1201 10,N SERIES FM PLUG



TE Part # 225094-2
N SER BHD JACK WEATHERPROOF



TE Part # 1-1478979-0
SMA STR PCB SKT GSS



Also in the Series | SMA



Battery Holders(1)




Connector Adapters & Connector Savers(8)



Connector Caps & Covers(3)




Connector Strain Relief(1)

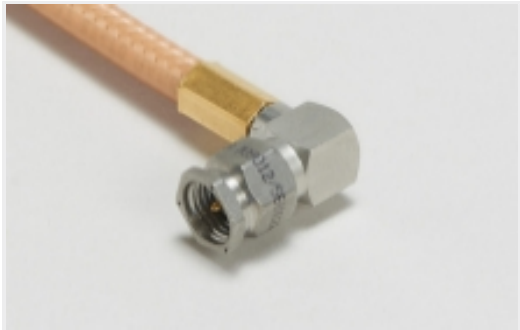

RF Cable Assemblies(119)


Customers Also Bought

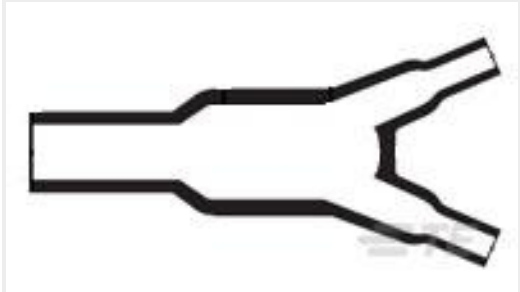

TE Part #061664-000
382A012-100-0



TE Part #CAT-HST-RNF100-6
RNF-100-6 Heat Shrink Tubing

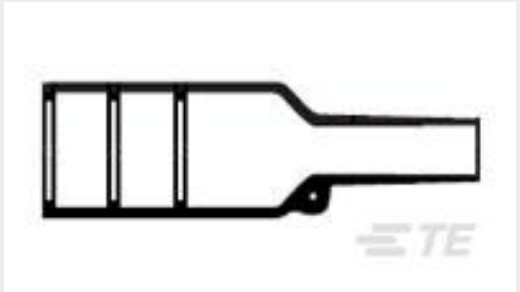


TE Part #864607-000
202K142-25/225-0



TE Part #31890
PIDG R 22-16 COMM 22-18 MIL 8




TE Part #2-1879026-1
YR1 0.1% 15R

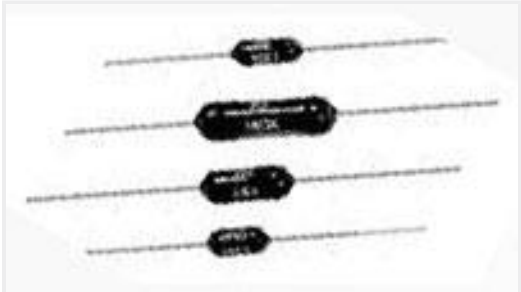


TE Part #8-1879665-8
H8 100K 0.1% 15PPM



TE Part #5205817-1
KIT SCREWLOCK FEMALE



TE Part #CJ6400-000
202K153-25/225-CS-2065-0

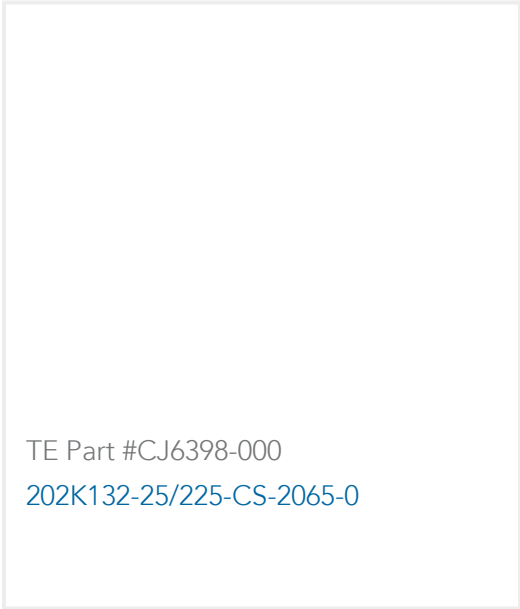

TE Part #CJ6398-000
202K132-25/225-CS-2065-0



Documents

Product Drawings

SMA STR PLG DS RG402 GSS

English

Instruction Sheets

Instruction Sheet (U.S.)

English

OSM Straight Cable Plug Direct Solder Attachment 1311057-1, 1050524-1, 1050525-1, 1313537-1, 1044533-1, 1327520-1, 1313725-1, and 1222331-1

English