




Connectors > Contacts > Connector Contacts

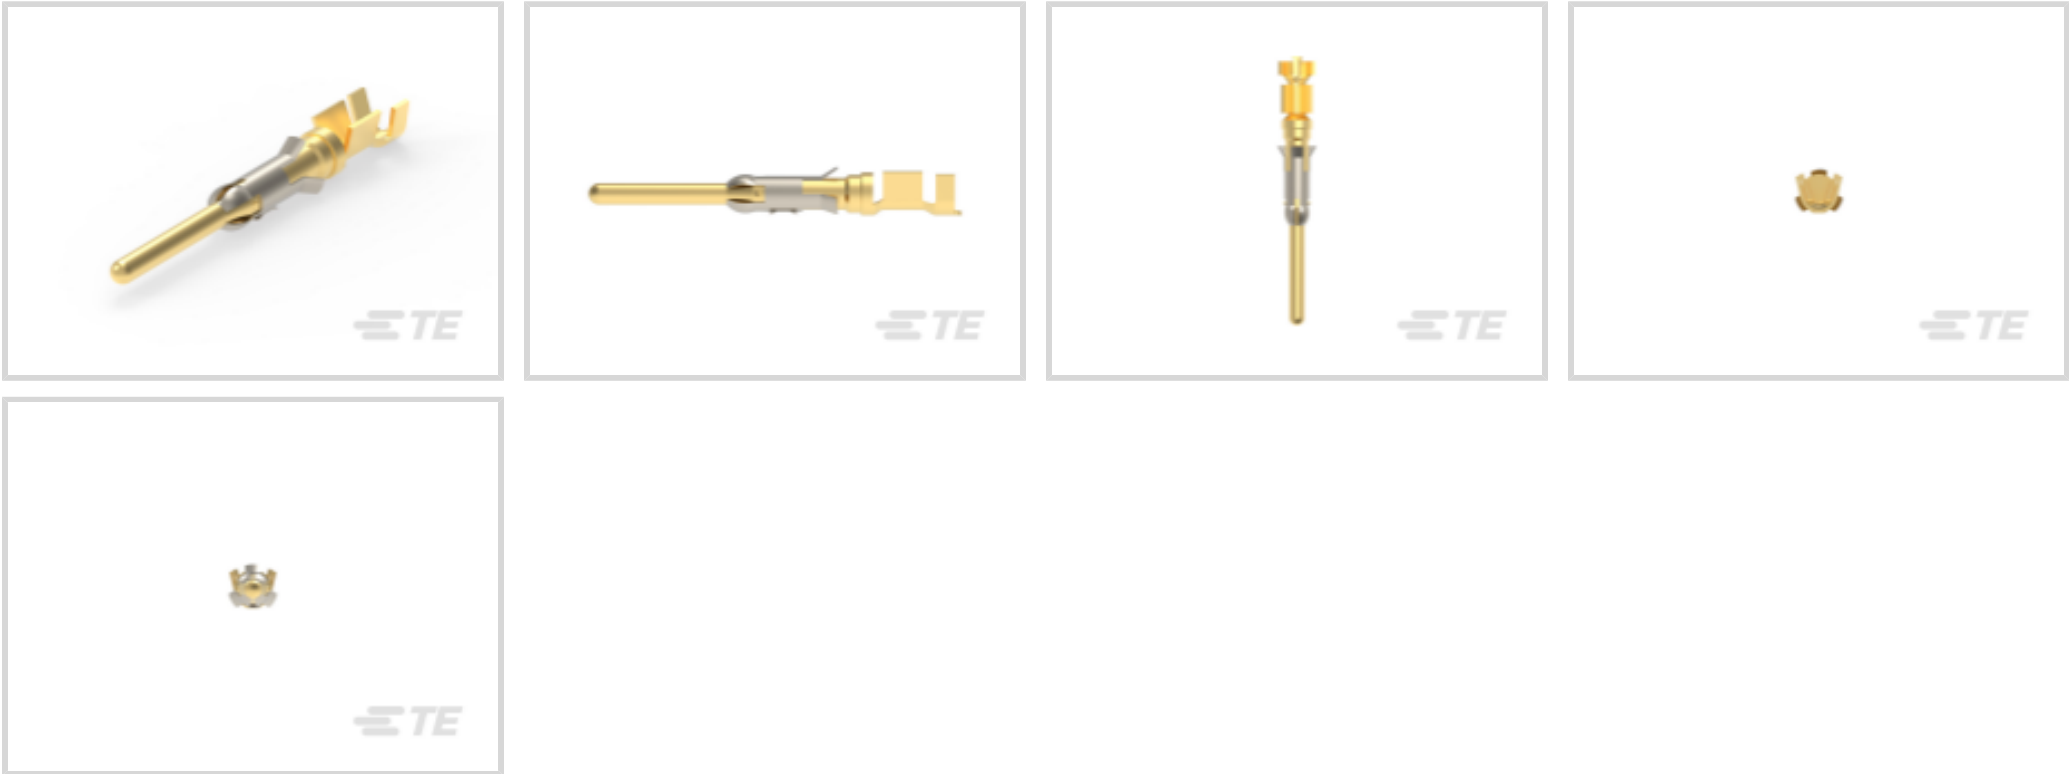

Contact Type: **Pin**

Contact Mating Area Plating Material: **Precious Metal**

Wire Contact Termination Area Plating Material: **Tin**

Contact Retention Within Housing: **With**

Contact Size: **Size 16**

Features

Product Type Features

Discrete Wire Type	Stranded
--------------------	----------

Contact Features

Contact Type	Pin
Contact Mating Area Plating Material	Precious Metal
Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	With
Contact Size	Size 16
Contact Base Material	Brass
Contact Current Rating (Max)	13 A
Mating Pin Diameter	1.57 mm[.062 in]
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Contact Mating Area Plating Material Finish	Bright
Wire Contact Termination Area Plating Thickness	1.02 µm[40 µin]
Wire Contact Termination Area Plating Material Finish	Bright



Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 µm[50 µin]

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Wire Size	.75 – 1.5 mm²
Compatible Insulation Diameter Range	2 – 2.5 mm[.078 – .098 in]

Usage Conditions

Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Identification Marking

Contact Color Code	Blue
--------------------	------

Packaging Features

Packaging Quantity	200
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 200893-2
INSERTION TOOL CONT



TE Part # 91523-1
CCII TYPE III+ PIN SKT 24-16 ASSY



TE Part # 305183
EXTRACT TOOL TYPE 2 20-16



TE Part # 2063487-2
SDE TYPE III+ 0.2-2.5mm2 DIE SET



TE Part # 58495-2
PROCIMPER DIE ASSY MULTIMATE



TE Part # 539972-1
EXTRACTION TOOL



TE Part # 2063487-1
SDE TYPE III+ 0.2-2.5mm2 ASSY



TE Part # 58495-1
PRO CRIMPER ASSY MULTIMATE



TE Part # 91505-1
CCII TYPE III+ 24-16 ASSY

Also in the Series | AMP Type III+



[Connector Contacts\(365\)](#)



[Insertion & Extraction Tools\(4\)](#)




[Power Contacts\(365\)](#)


Customers Also Bought




[TE Part #66100-6](#)
[III+ SKT,18-16,30AU>10,STRIP](#)

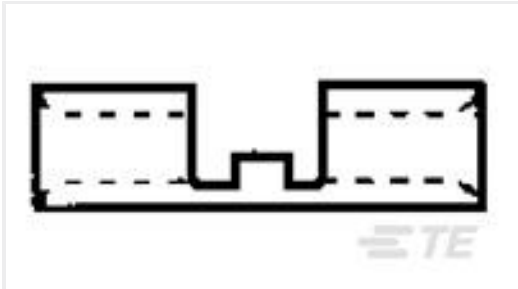

[TE Part #323698](#)
[SPLICE,SOLIS BUTT HT 12-10](#)

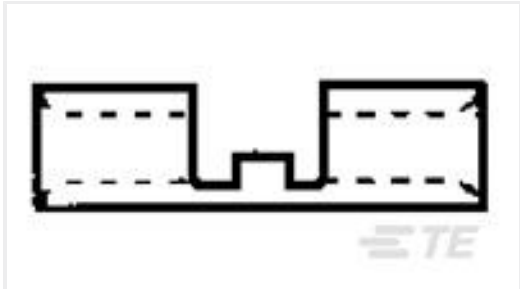

[TE Part #323878](#)
[SPLICE,SOLIS BUTT HT 16-14](#)

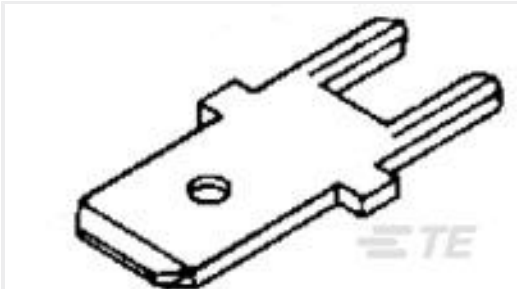

[TE Part #1-726386-2](#)
[250 FASTON,TAB,TPBR](#)




[TE Part #1-770253-0](#)
[UMNLII SOK PTPPHBZ LP LF 24-18](#)



[TE Part #796449-1](#)
[PLUG ASSY,CPC,17-14,REV SEX](#)



[TE Part #8-1676123-7](#)
[1/2W SM M/OX 5% 3K3](#)

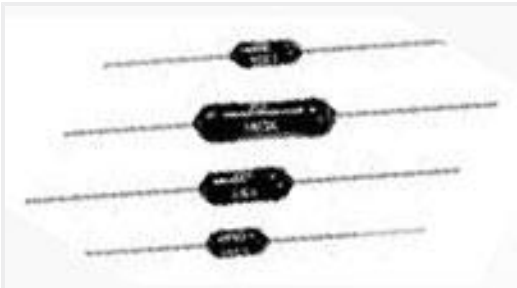

[TE Part #9-1879678-4](#)
[H4 1K0 0.1% 50PPM](#)



[TE Part #2334099-1](#)
[D-SUB CRIMP FEMALE 9 POS](#)



[TE Part #800531-SF](#)
[FN402-0.5-02](#)

Documents

Product Drawings

[SPEC. PLATED](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_1-163082-0_AW.2d_dxf.zip](#)

1-163082-0

Precious Metal, Pin Contact, 18 – 16 AWG, .75 – 1.5 mm² Wire, Size 16, Crimp, Brass, Power & Signal, -55 – 150 °C [-67 – 302 °F], AMP Type III+



English

Customer View Model

[ENG_CVM_CVM_1-163082-0_AW.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-163082-0_AW.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

English