

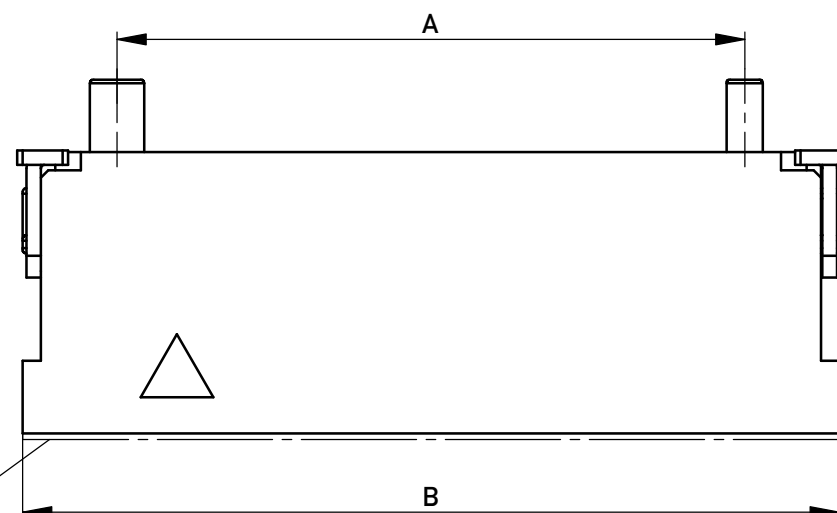
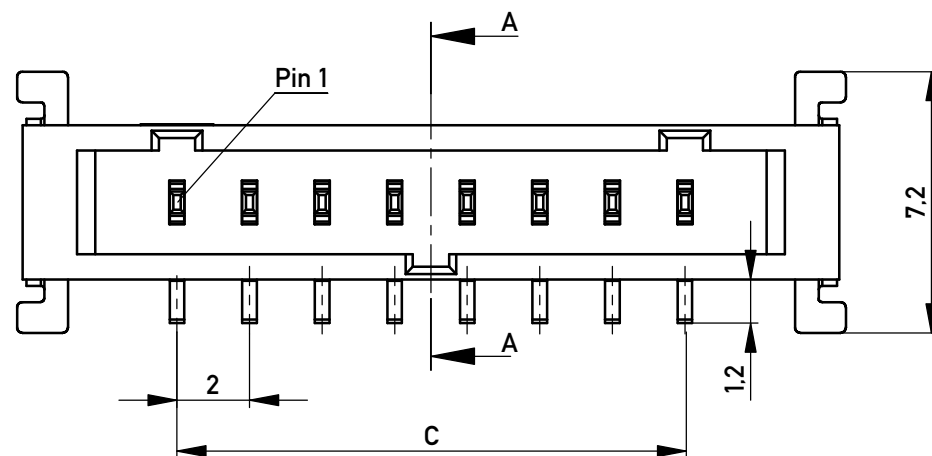


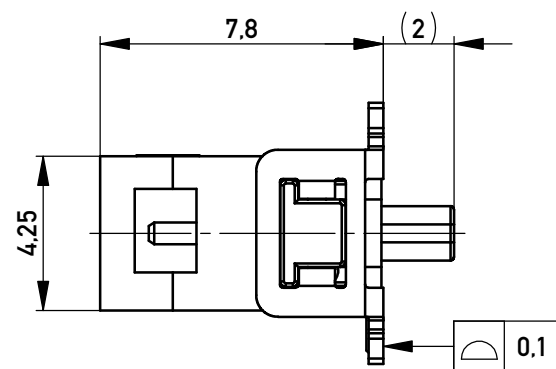


Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 400 Stück
Packaging unit: 400 pcs




Verpackung Stange / packaging tube

12	18
10	22
8	27
6	33
5	37
4	42
3	49
2	58
Polzahl No. of positions	Stück / pieces

Abspulrichtung - Reel off Direction

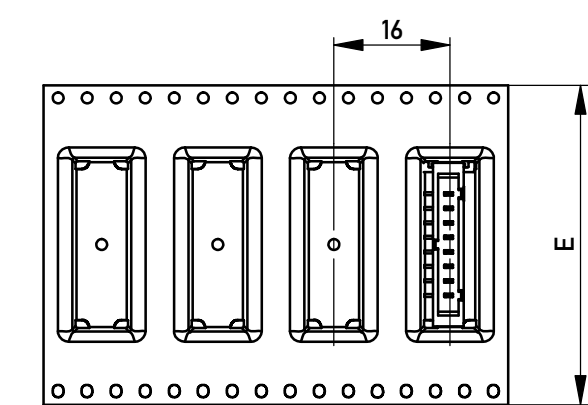


SCHNITT A-A

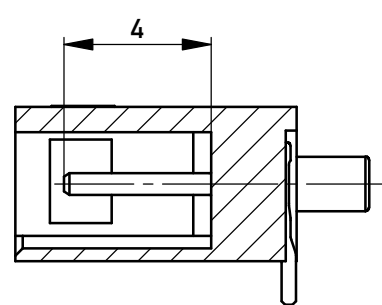

Klebestreifen für pick and place
tape for pick and place

Layout:

vorgeschlagene Toleranz für PCB Layout ± 0,05
recommended PCB layout tolerance ± 0,05

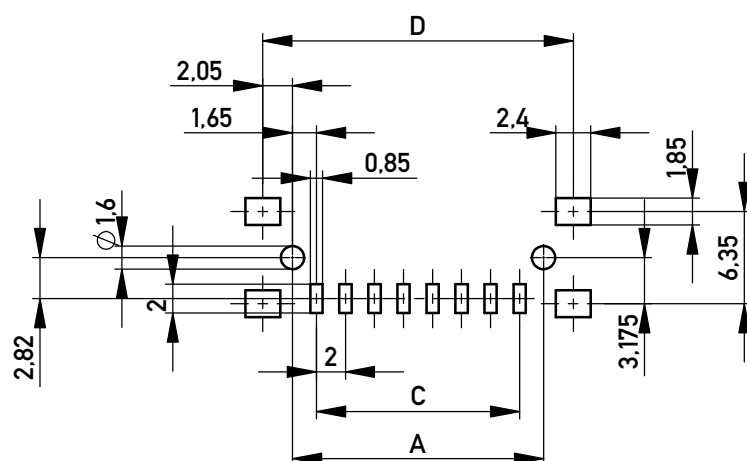


Material und Oberfläche:
Material and plating:

Gehäuse / housing: LCP, UL94V-0, natural
Kontakt / contact: Kupferlegierung 2.5µm verzinnt, 1.25µm Ni rundum
Copper alloy
2.5µm tin plating over 1.25µm Ni all over

Halteclip / bracket: 2.5µm verzinnt, 1.25µm Ni rundum
Copper alloy
2.5µm tin plating over 1.25µm Ni all over

Maße und Toleranzen in Übereinstimmung mit ASME Y14.5-2009 /
Interpret dimensions according to ASME Y14.5-2009

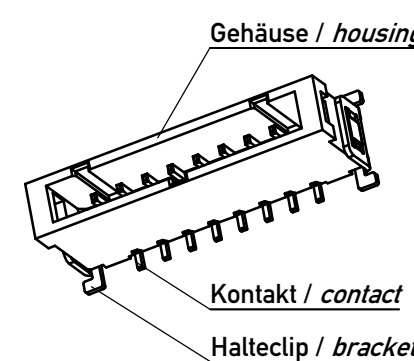

Copyright by ERNI Production GmbH & Co. KG
Proprietary notice pursuant to ISO 16016 to be observed.

Information:		Tolerances	Scale 5:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.	Designation	
d		10.04.2018	iBridge male 2mm pitch Single Row Vertical SMT	
Index		Date	109900	
			I	
			A3	
			Class IBRIDGE	