# RAMO 30 T - Pushbutton, white, M8

## 1.11.010.001/0220



| General information | |
|---|---|
| Form | flush |
| Color of front ring | stainless steel |
| Form of collar | round |
| Color lens | white |

| Dimensions | |
|---|---|
| Mounting hole | 30.3 mm |


| Mechanical design | |
|---|---|
| Contact | momentary, 1 NO |
| Contact materials | gold |
| Mounting | ring nut |
| Terminals | M8 |
| Reverse polarity protection | yes |
| Labeling | individually with FLEXLAB |
| Output | 1 NO, PNP |
| Torque for nut ring | 1.2 Nm |

| Mechanical characteristics | |
|---|---|
| Operating force F1 (+/-20 %) | 5 N |


| Electrical characteristics | |
|---|---|
| Rated voltage min. | DC 0.02 V V |
| Rated current min. | 0.01 mA |
| Rated voltage max. | DC 35 V |
| Rated current max. | 100 mA |
| Rated power max. | 1 W (ohmsche Last) W |
| LED power supply | DC 24 V +- 20% / 10 mA +- 20% |

| Other specifications | |
|---|---|
| Ambient temp. operating min. | -40 °C |
| Ambient temp. operating max. | +70 °C |
| B10 | 500,000 cycle |
| Degree of protection from front side | IP 66, IP 67, IP 69K |
| Degree of protection from rear side | IP 66 (je nach verwendetem Stecker IP 67 oder IP 69K) |
| Environmental restistance | acc. to IEC 60068-2-14, -30, -33 and -78 |
| Operating life cycles | 250,000 |
| ROHS compliant | yes |
| REACH compliant | yes |

Technical data are approximate and intended solely for general orientation in the selection of a product.
Subject to modifications and errors. Images and other graphics may only be similar.
For more information, refer to www.rafi.de chapter Imprint / Data Protection.

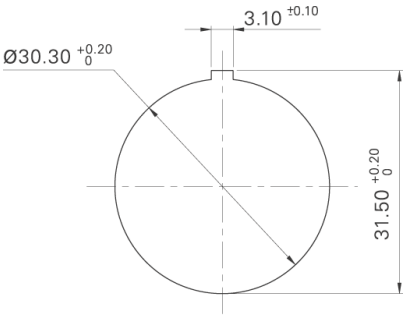


Einbauöffnung nach IEC 60947-5-1

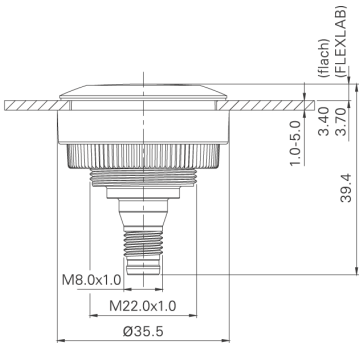


Technical data are approximate and intended solely for general orientation in the selection of a product.
Subject to modifications and errors. Images and other graphics may only be similar.
For more information, refer to www.rafi.de chapter Imprint / Data Protection.