




Connectors > PCB Connectors > PCB Headers & Receptacles

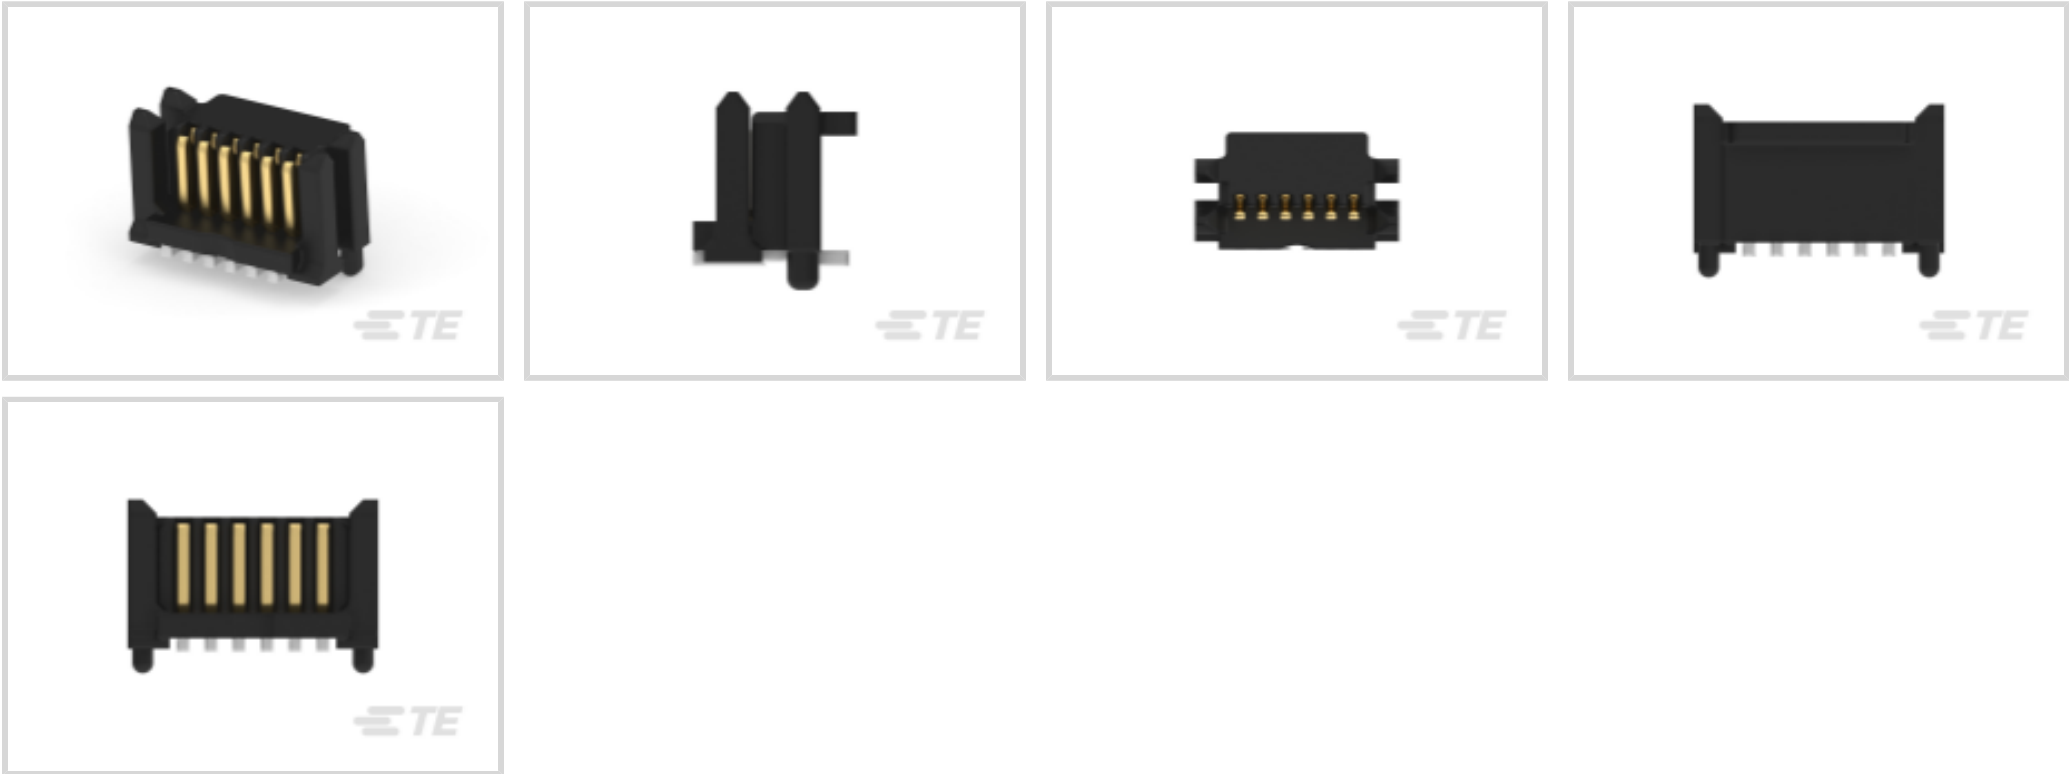

PCB Connector Type: **PCB Mount Hermaphroditic Connector**

Connector System: **Board-to-Board**

Number of Positions: **6**

Number of Rows: **1**

Centerline (Pitch): **.8 mm [.031 in]**

Features

Product Type Features

Connector Shape	Rectangular
PCB Connector Type	PCB Mount Hermaphroditic Connector
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Columns	6
Number of Loaded Positions	6
Stacking Configuration	Stack Through
Stackable	Yes
Number of Positions	6
Number of Rows	1



PCB Mount Orientation	Vertical
Board-to-Board Configuration	Parallel

Electrical Characteristics

Dielectric Withstanding Voltage (Max)	500 Vrms
---------------------------------------	----------

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Layout	Inline
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Hermaphroditic
Contact Current Rating (Max)	2.6 A
PCB Contact Termination Area Plating Material	Tin

Termination Features

Termination Method to PCB	Surface Mount
---------------------------	---------------

Mechanical Attachment

PCB Mount Retention Type	Location Peg
PCB Mount Alignment Type	Locating Posts
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	Without

Housing Features

Mating Entry Location	Top
Centerline (Pitch)	.8 mm[.031 in]
Housing Material	PPA

Dimensions

Connector Width	3.95 mm[.155 in]
Connector Height	4.35 mm[.171 in]
Connector Length	7.16 mm[.282 in]
Stack Height	5 mm[.197 in]

Usage Conditions



Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-50 – 125 °C[-58 – 257 °F]

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Compatible With Agency/Standards Products	DIN, UL
Industry Standard	IEC
Compatible With Approved Standards Products	UL
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Reel Diameter	330 mm[12.99 in]
Packaging Quantity	1500
Packaging Method	Tape & Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: FEB 2026 (253) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

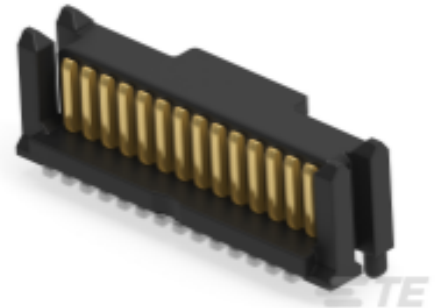


TE Part # 284257-E
MICROS STV 14 407 188 * 0007 J 3 284257



TE Part # 244313-E
MICROS STV 50 407 188 ELPO 0007 J 3 2443

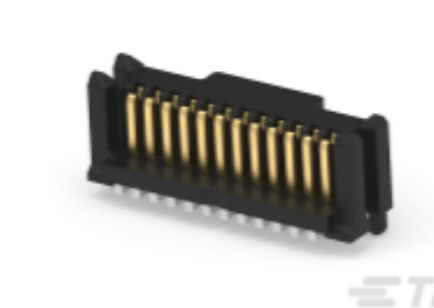


TE Part # 114712-E
MICROS STV 12 407 188 * 0007 J 3 114712

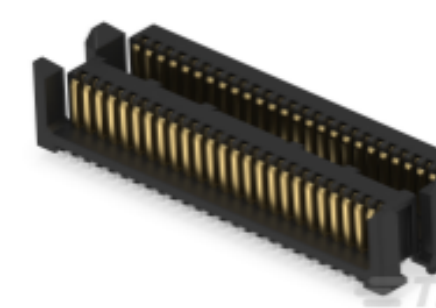


TE Part # 114713-E
MICROS STV 50 407 188 * 0007 J 3 114713

Also in the Series | ERNI MicroStac

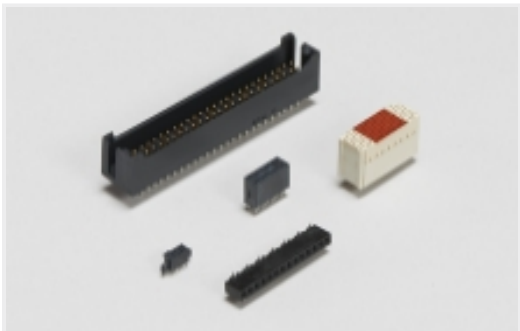

Board-to-Board Headers & Receptacles(9)

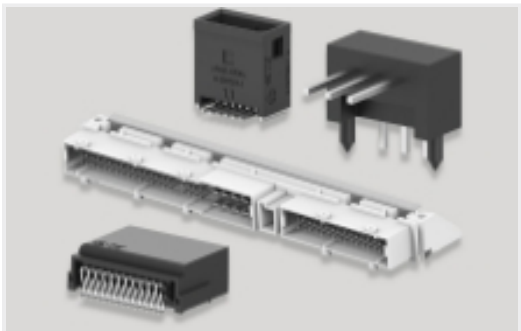


PCB Headers & Receptacles(9)



Rectangular Power Connectors(9)


Customers Also Bought

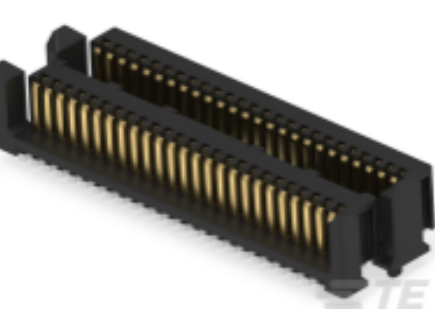


TE Part #114713-E
MICROS STV 50 407 188 * 0007 J 3 114713



TE Part #5-147377-2
20 SYS50 SMT HDR DR SHD SN

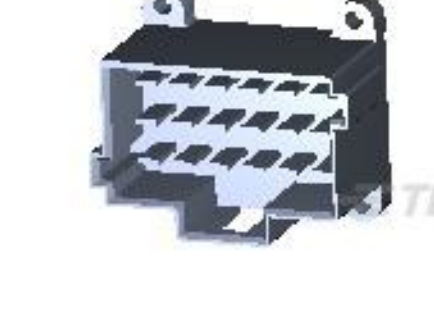


TE Part #967116-1
MESSERLEISTE 18P

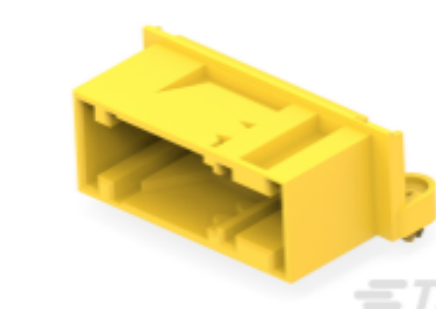


TE Part #CAT-N04-MDH06390
MQS 0.63mm 90 Degree Headers




TE Part #6-1879133-0
RN 0603 3K65 0.1% 10PPM 1K RL

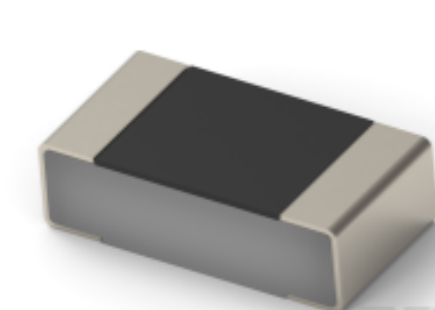

TE Part #2176467-4
TLRP 1206 1.0W R015 1% 50PPM 5K RL

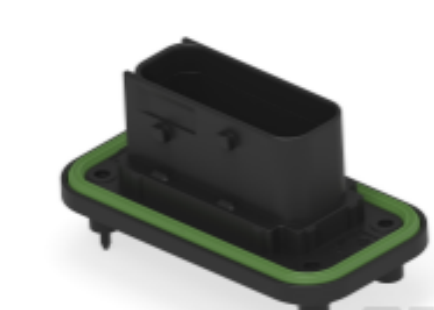

TE Part #CAT-J4A-HDSCH
Heavy Duty Sealed Connector Headers

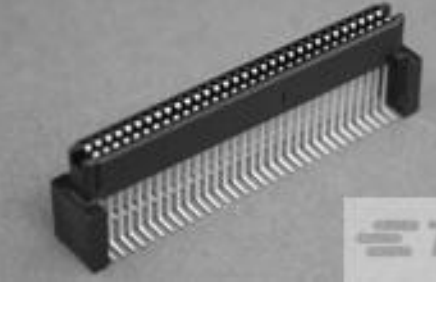

TE Part #5146896-1
1FHR,64,30A/S,S,C,S14,15

Documents

Product Drawings



MICROS STV 6 407 188 * 0007 J 3 114711 M

German

CAD Files

Customer View Model

ENG_CVM_CVM_114711-E_1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_114711-E_1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_114711-E_1.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Datasheet - ERNI MicroStac 0.8mm Connectors

English

Datasheet - ERNI MicroStac 0.8mm Connectors

German