
**Part Number :** 1204063011
**Product Description :** Ultra-Lock 2.0 (M12) Receptacle, 4 Poles, Male (Straight) to Leads, D-Coded, Front Panel Mount, M16 Mounting Threads, 0.30m (11.81") Length
**Series Number :** 120406
**Status :** Active
**Product Category :** Circular Industrial Connectors
**Engineering Part Number :** ERYA2U26E03C300

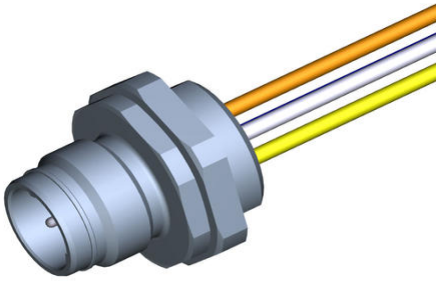

## Documents & Resources

### Drawings

1204063011_sd.pdf

1204063011_sd.pdf

### Specifications

1204000001-P10.pdf

## Product Environment Compliance

### Compliance

| | |
|---|---|
| GADSL/IMDS | Not Relevant |
| China RoHS | Not Relevant |
| EU ELV | Compliant with Exemption 3 per 2000/53/EC |
| Low-Halogen Status | Not Relevant |
| REACH SVHC | Contains Lead; Triphenyl-phosphate per D(2025)4165-DC (25 June 2025) |
| EU RoHS | Compliant with Exemption 6(c) per EU 2015/863 |

Compliance Statements

- EU RoHS
- REACH SVHC
- Low-Halogen

Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest

- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

UKCA - Declaration of Conformity

CE - Declaration of Conformity

---

## Part Details

### General

| | |
|---|---|
| Status | Active |
| Category | Circular Industrial Connectors |
| Series | 120406 |
| Description | Ultra-Lock 2.0 (M12) Receptacle, 4 Poles, Male (Straight) to Leads, D-Coded, Front Panel Mount, M16 Mounting Threads, 0.30m (11.81") Length |
| IP Rating | IP67, IP69K |
| Product Name | Ultra-Lock 2.0 (M12) |
| Type | Single Ended (pigtail) |
| UPC | 195842412163 |

### Electrical

| | |
|---|---|
| Current - Maximum per Contact | 4.0A |
| Voltage - Maximum | 250V |

### Physical

| | |
|---|---|
| Coupling Type | External Thread, Push to Lock |
| Gender | Male |
| Keyway | D-Coded |
| Length | 0.30m |

| | |
|---|---|
| Material - Component | Nickel-plated Brass |
| Mounting Thread Size | M16 |
| Net Weight | 22.900/g |
| Orientation | Straight |
| Panel Mount | Front |
| Poles | 4 |
| Temperature Range - Operating | -40° to +90°C |
| Wire/Cable Type | Leads, UL 1569 |
| Wire Size (AWG) | 22 |