

HC-26P1N8A80DUX - Cable connector



1244836

<https://www.phoenixcontact.com/us/products/1244836>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable connector, straight, Screw locking mechanism, M27, number of positions: 26, contact connection type: Pin, shielded: yes, degree of protection: IP67, cable diameter range: 2 mm ... 14.5 mm, number of positions: 26, connection method: Crimp connection, series: HC, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

Commercial data

Item number	1244836
Packing unit	12 pc
Minimum order quantity	12 pc
Sales key	AB32
Product key	ABRAJA
GTIN	4063151430597
Weight per piece (including packing)	87 g
Weight per piece (excluding packing)	79.569 g
Customs tariff number	85366990
Country of origin	DE

HC-26P1N8A80DUX - Cable connector



1244836

<https://www.phoenixcontact.com/us/products/1244836>

Technical data

Notes

Order information:	Order crimp contacts Ø 1 mm separately
--------------------	--

Product properties

Product type	Circular connector (cable-side)
Series	HC
Application	Signal
Number of positions	26
Connection profile	26
Shielded	yes
Coding	N
Thread type	M27

Material specifications

Material Housing	Metal
Seal material	NBR

Connection data

Conductor connection	
Connection method	Crimp connection

Electrical properties

Contact	
Contact diameter	1 mm
Nominal current I_N	8 A
Nominal voltage U_N	48 V AC
	74 V DC
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	1.5 kV

Connector

Type	straight
Direction of rotation	Standard

Connection 1	
Head design	Pin
Head cable outlet	straight
Head thread type	M27

Cable/line

HC-26P1N8A80DUX - Cable connector



1244836

<https://www.phoenixcontact.com/us/products/1244836>

External cable diameter	2 mm ... 14.5 mm
-------------------------	------------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67 (When plugged in)
Ambient temperature (operation)	-20 °C ... 125 °C
Altitude	2000 m

HC-26P1N8A80DUX - Cable connector


1244836

<https://www.phoenixcontact.com/us/products/1244836>




Drawings

Dimensional drawing

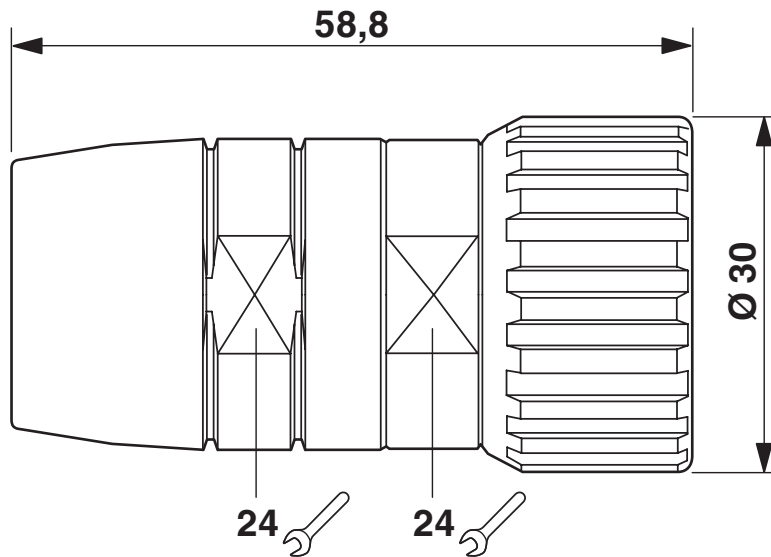

Dimensional drawing

Schematic diagram

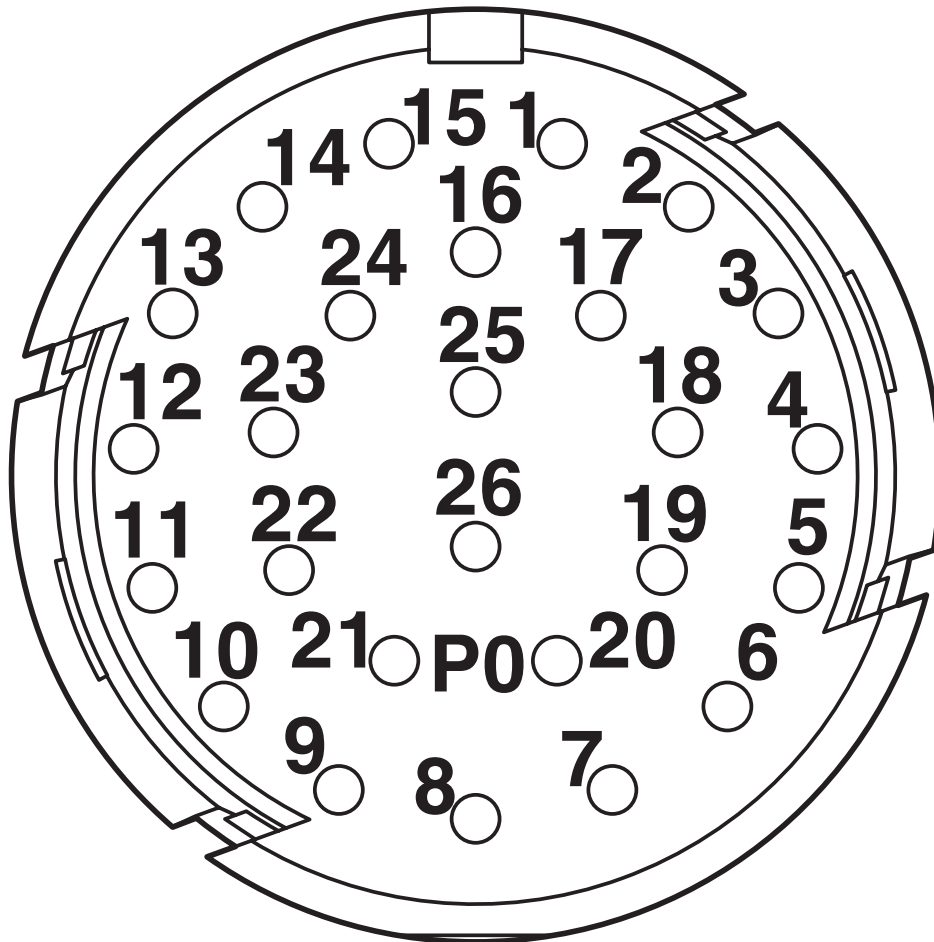

Connector pin assignment

HC-26P1N8A80DUX - Cable connector



1244836

<https://www.phoenixcontact.com/us/products/1244836>

Classifications

ECLASS

ECLASS-13.0	27440116
ECLASS-15.0	27440116

ETIM

ETIM 9.0	EC002635
----------	----------

HC-26P1N8A80DUX - Cable connector



1244836
<https://www.phoenixcontact.com/us/products/1244836>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com