

4

3

2

1

used for:

F

F

E

E

D

D

C


C

B

B

A

A

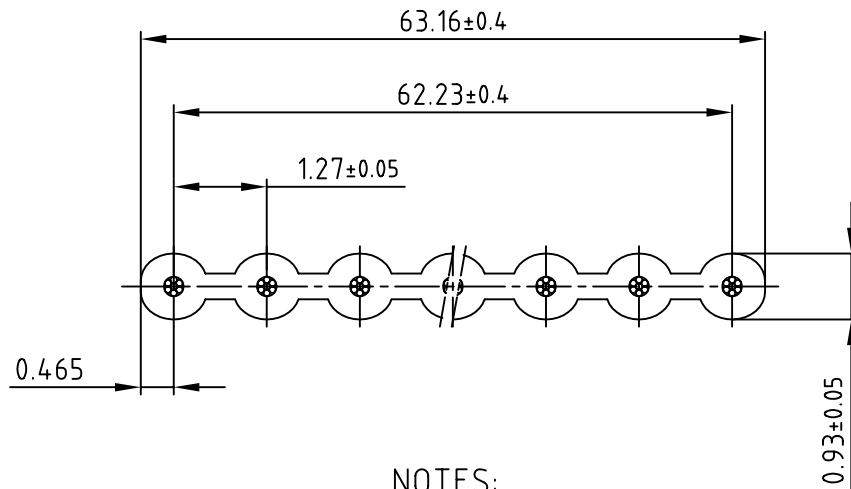

NOTES:

1. UL FILE NO.: E111235
2. CSA FILE NO.: LL89862
3. UL STYLE: 2651
4. TEMPERATURE RATING: -20°C TO 105°C
5. FLAMMABILITY RATING: UL-VW-1 CSA-FT-1
6. VOLTAGE RATING: 300V

PHYSICAL:

1. INSULATION MATERIAL: POLYVINYL CHLORIDE (PVC)
2. CONDUCTOR: 28AWG (7×0.127) STRANDED
TINNED COPPER
3. COLOR: GREY WITH RED STRIP

ELECTRICAL:

1. IMPEDANCE: 100 OHM (UNBLANCED)
2. CAPACITANCE: 60pf/m
3. INSULATION RESISTANCE: 100 MOhm x km at 20°C
4. CONDUCTOR RESISTANCE: max. 216 Ohm / km at 20°C
5. OPERATING VOLTAGE: 300 V
6. CURRENT RATING: 2.1 A at 25°C

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance			
				2007	date	name	
				drawn	28.09.	Sonnenberg	
				appd.	28.09.	E. Mickenbecker	
				norm			
				d-old			
a	Origin						
rev.	description	date	name				

4

3

2

1