
**Part Number :** 150140243
**Product Description :** 0.25mm Pitch Premo-Flex FFC/FPC Jumper, Same Side Contacts (Type A), 51.00mm  Cable Length, Gold (Au) Plating, 43 Circuits
**Series Number :** 15014
**Status :** Active
**Product Category :** Flat-Flexible Cable (FFC)

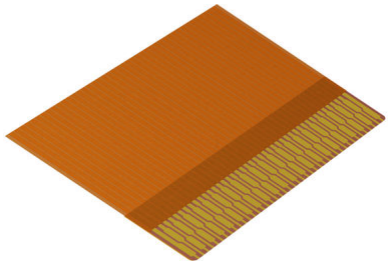

## Documents and Resources

### Drawings

150140243_sd.pdf

STEP AP242

SOLIDWORKS

Creo

### Specifications

1501400001-000.pdf

## Product Environment Compliance

### Compliance

| | |
|---|---|
| GADSL/IMDS | Not Relevant |
| China RoHS | per SJ/T 11365-2006 |
| EU ELV | Not Relevant |
| Low-Halogen Status | Not Reviewed per IEC 61249-2-21 |
| REACH SVHC | Not Reviewed per D(2025)7771-DC (04 Feb 2026) |
| EU RoHS | Compliant per EU 2015/863 |

Compliance Statements

- EU RoHS
- REACH SVHC
- Low-Halogen

Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474

- chemSHERPA (xml)

Substances of Interest
- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

---

## Part Details

### General

| | |
|---|---|
| Status | Active |
| Category | Flat-Flexible Cable (FFC) |
| Series | 15014 |
| Description | 0.25mm Pitch Premo-Flex FFC/ FPC Jumper, Same Side Contacts (Type A), 51.00mm Cable Length, Gold (Au) Plating, 43 Circuits |
| Product Name | Premo-Flex FFC/FPC Jumper |
| UPC | 191130093236 |

### Electrical

| | |
|---|---|
| Current - Maximum per Contact | 0.2A |
| Voltage - Maximum | N/A |

### Physical

| | |
|---|---|
| Cable Length | 51.00mm |
| Circuits (Loaded) | 43 |
| Contact Layout Type | A (same side) |
| Design Feature | Miniaturization |
| Material - Plating Mating | Gold |
| Net Weight | 0.144/g |
| Packaging Type | Bag |
| Pitch - Mating Interface | 0.25mm |
| Temperature Range - Operating | -40° to +105°C |
| Termination Style | FFC/FPC Connector |
| Wire/Cable Type | Flexible Printed Circuit (FPC) |
| Wire Size (AWG) | N/A |

## Mates With / Use With

### Mates with Part(s)

| Description | Part Number |
| --- | --- |
| Easy-On Front Flip FPC Connector, 0.25mm Pitch, Surface Mount, 1.20mm Height, Top Contact, Right-Angle, Low Halogen, 43 Circuits, 3000 Pieces per Reel | 5033004310 |