

# DATA SHEET

## TRANSIENT VOLTAGE SUPPRESSORS

### AC/DC POWER SUPPLY

15KPA series

RoHS compliant & Halogen free



Product specification— February 21, 2021 V.2



## Transient Voltage Suppressors (TVS) Data Sheet

### Features

- Glass passivated junction
- Low incremental surge resistance
- Excellent clamping capability
- 15000W peak pulse power capability at 10/1000μs waveform, repetition rate (duty cycle): 0.05%
- Fast response time
- Typical  $I_R$  less than 2μA above 30V.
- High Temperature soldering guaranteed: 265°C/10 seconds/.375", (9.5mm) lead length, 5lbs (2.3kg) tension
- Plastic package has underwriters laboratory flammability 94V-0
- Meets MSL level 1, per J-STD-020.
- Safety certification: UL: E244458
- IEC61000-4-2 ESD 30KV Air, 30KV contact compliance



### Mechanical Data

- Case: Moulded plastic over glass passivated junction
- Terminal: Plated Axial leads, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode except bi-directional models
- Mounting Position: Any
- Weight: 2.30g

### Applications

- I/O interface
- AC/DC power supply
- Low frequency signal transmission line (RS232, RS485, etc.)

### Maximum Ratings and Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.


| Rating                                                                                                            | Symbol          | Value         | Units |
|-------------------------------------------------------------------------------------------------------------------|-----------------|---------------|-------|
| Peak pulse power dissipation at 10/1000μs waveform (Note1, Fig.1)                                                 | $P_{PPM}$       | Minimum 15000 | Watts |
| Peak pulse current of at 10/1000μs waveform (Note 1, Fig.3)                                                       | $I_{PPM}$       | See Table     | Amps  |
| Steady state power dissipation at $T_L=75^\circ\text{C}$ (Fig.5)                                                  | $P_{M(AV)}$     | 8.0           | Watts |
| Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load, (JEDEC Method) (Note2, Fig.6) | $I_{FSM}$       | 400           | Amps  |
| Operating junction and Storage Temperature Range.                                                                 | $T_J, T_{STG}$  | -55 to +150   | °C    |
| Typical thermal resistance junction to lead                                                                       | $R_{\theta JL}$ | 8             | °C/W  |
| Typical thermal resistance junction to ambient                                                                    | $R_{\theta JA}$ | 40            | °C/W  |

Notes: 1. Non-repetitive current pulse, per Fig.3 and derated above  $T_A=25^\circ\text{C}$  per Fig.2.

2. 8.3ms single half sine-wave, or equivalent square wave, duty cycle=4 pulses per minutes maximum.

## Dimensions (P600)

| Symbol | Millimeters |      | Inches |       |
|--------|-------------|------|--------|-------|
|        | Min.        | Max. | Min.   | Max.  |
| L      | 25.40       | -    | 1.000  | -     |
| T      | 8.60        | 9.10 | 0.340  | 0.360 |
| d      | 8.60        | 9.10 | 0.340  | 0.360 |
| s      | 1.19        | 1.32 | 0.047  | 0.052 |

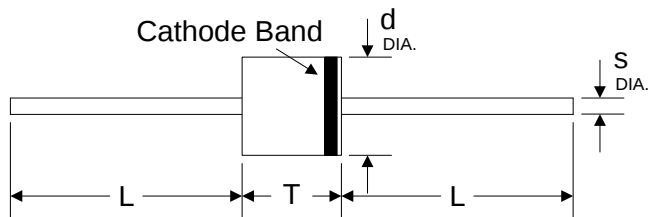Electrical Characteristics ( $T_A=25^{\circ}\text{C}$ )

| Part Number    |               | Reverse Stand-Off Voltage | Breakdown Voltage @ $I_T$ | Test Current | Maximum Clamping Voltage @ $I_{PP}$ | Peak Pulse Current | Reverse Leakage @ $V_{RWM}$ |
|----------------|---------------|---------------------------|---------------------------|--------------|-------------------------------------|--------------------|-----------------------------|
| Unidirectional | Bidirectional | $V_{RWM}(V)$              | $V_{BR}(V)$               | $I_T(mA)$    | $V_C(V)$                            | $I_{PP}(A)$        | $I_R(\mu A)$                |
| 15KPA17A       | 15KPA17CA     | 17.0                      | 18.99~21.22               | 50           | 29.3                                | 515.4              | 5000                        |
| 15KPA18A       | 15KPA18CA     | 18.0                      | 20.11~22.65               | 50           | 30.9                                | 488.7              | 5000                        |
| 15KPA20A       | 15KPA20CA     | 20.0                      | 22.34~24.96               | 20           | 34.3                                | 440.2              | 1500                        |
| 15KPA22A       | 15KPA22CA     | 22.0                      | 24.57~27.46               | 10           | 37.1                                | 407.0              | 500                         |
| 15KPA24A       | 15KPA24CA     | 24.0                      | 26.81~29.95               | 5            | 40.7                                | 371.0              | 150                         |
| 15KPA26A       | 15KPA26CA     | 26.0                      | 29.04~32.45               | 5            | 44.0                                | 343.2              | 50                          |
| 15KPA28A       | 15KPA28CA     | 28.0                      | 31.28~34.95               | 5            | 47.5                                | 317.9              | 25                          |
| 15KPA30A       | 15KPA30CA     | 30.0                      | 33.51~37.44               | 5            | 50.7                                | 297.8              | 15                          |
| 15KPA33A       | 15KPA33CA     | 33.0                      | 36.90~41.19               | 5            | 54.7                                | 276.1              | 2                           |
| 15KPA36A       | 15KPA36CA     | 36.0                      | 40.20~44.93               | 5            | 59.8                                | 252.5              | 2                           |
| 15KPA40A       | 15KPA40CA     | 40.0                      | 44.70~49.92               | 5            | 65.8                                | 229.5              | 2                           |
| 15KPA43A       | 15KPA43CA     | 43.0                      | 48.00~53.67               | 5            | 69.8                                | 216.3              | 2                           |
| 15KPA45A       | 15KPA45CA     | 45.0                      | 50.30~56.16               | 5            | 72.8                                | 207.4              | 2                           |
| 15KPA48A       | 15KPA48CA     | 48.0                      | 53.60~59.91               | 5            | 77.7                                | 194.3              | 2                           |
| 15KPA51A       | 15KPA51CA     | 51.0                      | 57.00~63.65               | 5            | 82.9                                | 182.1              | 2                           |
| 15KPA54A       | 15KPA54CA     | 54.0                      | 60.30~67.39               | 5            | 87.7                                | 172.2              | 2                           |
| 15KPA58A       | 15KPA58CA     | 58.0                      | 64.80~72.39               | 5            | 93.8                                | 161.0              | 2                           |

Electrical Characteristics (T<sub>A</sub>=25°C)

| Part Number    |               | Reverse Stand-Off Voltage | Breakdown Voltage @I <sub>T</sub> | Test Current        | Maximum Clamping Voltage @I <sub>PP</sub> | Peak Pulse Current  | Reverse Leakage @V <sub>RWM</sub> |
|----------------|---------------|---------------------------|-----------------------------------|---------------------|-------------------------------------------|---------------------|-----------------------------------|
| Unidirectional | Bidirectional | V <sub>RWM</sub> (V)      | V <sub>BR</sub> (V)               | I <sub>T</sub> (mA) | V <sub>C</sub> (V)                        | I <sub>PP</sub> (A) | I <sub>R</sub> (μA)               |
| 15KPA60A       | 15KPA60CA     | 60.0                      | 67.00~74.88                       | 5                   | 97.4                                      | 155.0               | 2                                 |
| 15KPA64A       | 15KPA64CA     | 64.0                      | 71.50~79.87                       | 5                   | 104.2                                     | 144.9               | 2                                 |
| 15KPA70A       | 15KPA70CA     | 70.0                      | 78.20~87.36                       | 5                   | 113.6                                     | 132.9               | 2                                 |
| 15KPA75A       | 15KPA75CA     | 75.0                      | 83.80~93.60                       | 5                   | 122.0                                     | 123.8               | 2                                 |
| 15KPA78A       | 15KPA78CA     | 78.0                      | 87.10~97.35                       | 5                   | 126.1                                     | 119.7               | 2                                 |
| 15KPA85A       | 15KPA85CA     | 85.0                      | 94.90~106.08                      | 5                   | 137.6                                     | 109.7               | 2                                 |
| 15KPA90A       | 15KPA90CA     | 90.0                      | 100.50~112.32                     | 5                   | 145.6                                     | 103.7               | 2                                 |
| 15KPA100A      | 15KPA100CA    | 100.0                     | 111.70~124.80                     | 5                   | 161.3                                     | 93.6                | 2                                 |
| 15KPA110A      | 15KPA110CA    | 110.0                     | 122.90~137.28                     | 5                   | 178.6                                     | 84.5                | 2                                 |
| 15KPA120A      | 15KPA120CA    | 120.0                     | 134.00~149.76                     | 5                   | 192.3                                     | 78.5                | 2                                 |
| 15KPA130A      | 15KPA130CA    | 130.0                     | 145.20~162.25                     | 5                   | 208.3                                     | 72.5                | 2                                 |
| 15KPA150A      | 15KPA150CA    | 150.0                     | 167.60~187.21                     | 5                   | 241.9                                     | 62.4                | 2                                 |
| 15KPA160A      | 15KPA160CA    | 160.0                     | 178.70~199.69                     | 5                   | 258.6                                     | 58.4                | 2                                 |
| 15KPA170A      | 15KPA170CA    | 170.0                     | 189.90~212.17                     | 5                   | 272.7                                     | 55.4                | 2                                 |
| 15KPA180A      | 15KPA180CA    | 180.0                     | 201.10~224.65                     | 5                   | 288.5                                     | 52.3                | 2                                 |
| 15KPA200A      | 15KPA200CA    | 200.0                     | 223.40~249.61                     | 5                   | 319.1                                     | 47.3                | 2                                 |
| 15KPA220A      | 15KPA220CA    | 220.0                     | 245.70~274.57                     | 5                   | 352.5                                     | 42.8                | 2                                 |
| 15KPA240A      | 15KPA240CA    | 240.0                     | 268.10~299.53                     | 5                   | 384.6                                     | 39.3                | 2                                 |
| 15KPA260A      | 15KPA260CA    | 260.0                     | 290.40~324.49                     | 5                   | 416.7                                     | 36.2                | 2                                 |
| 15KPA280A      | 15KPA280CA    | 280.0                     | 312.80~349.45                     | 5                   | 454.5                                     | 33.2                | 2                                 |

Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$  unless otherwise noted)

Figure 1. Peak Pulse Power Rating Curve

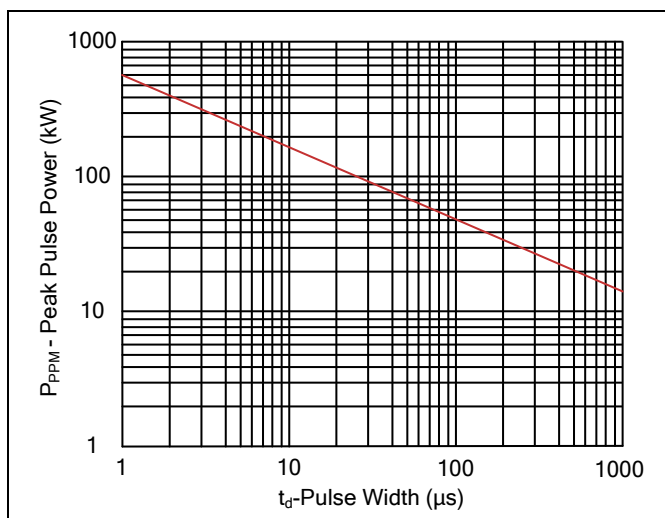


Figure 2. Pulse Derating Curve

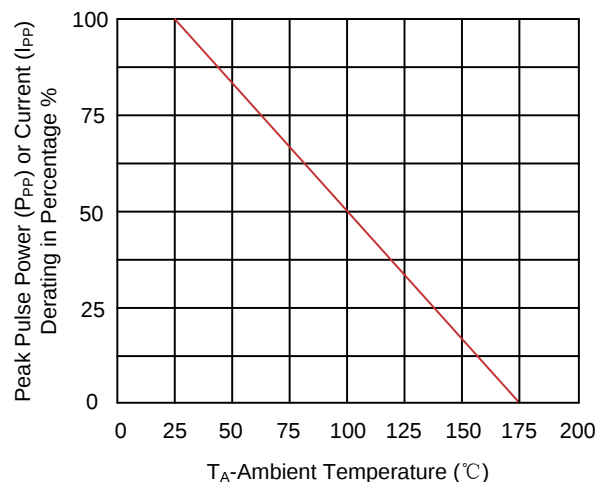


Figure 3. Pulse Waveform

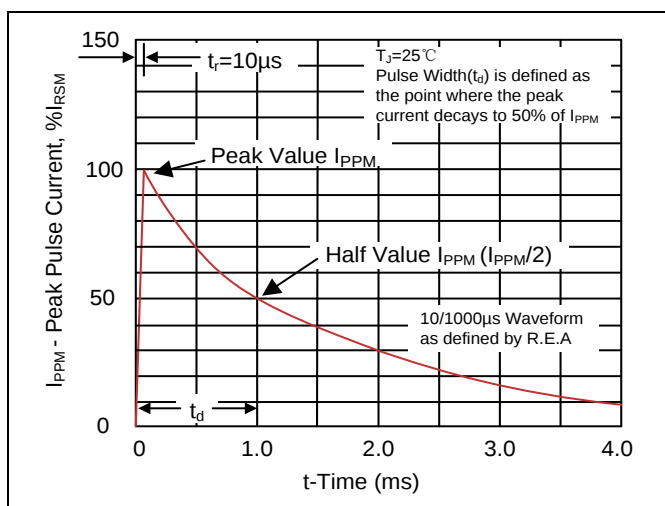


Figure 4. Typical Junction Capacitance

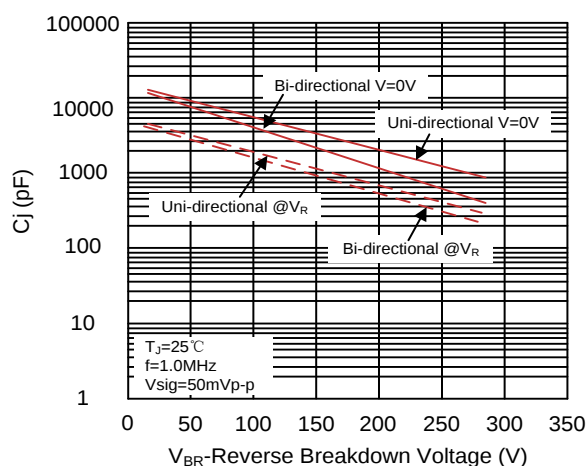


Figure 5. Steady State Power Dissipation Derating Curve



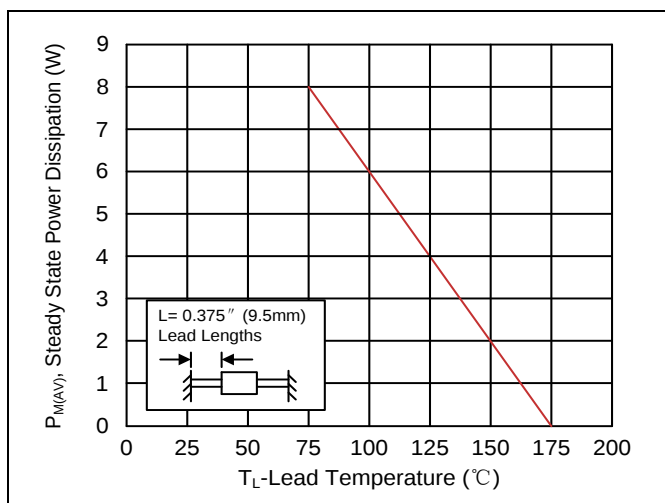


Figure 6. Maximum Non-Repetitive Forward Surge Current Uni-Directional Only

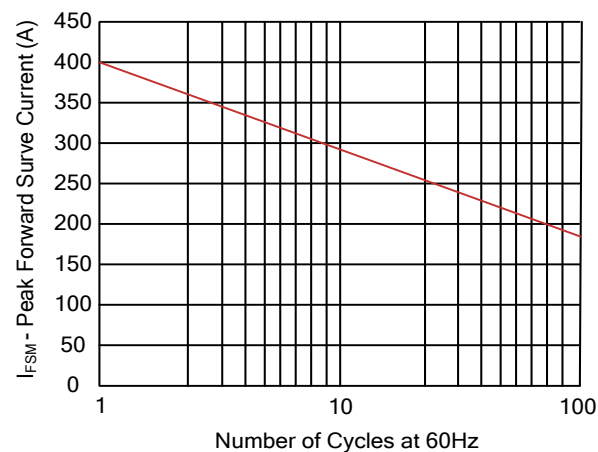


## Recommended Soldering Conditions

### Wave Soldering

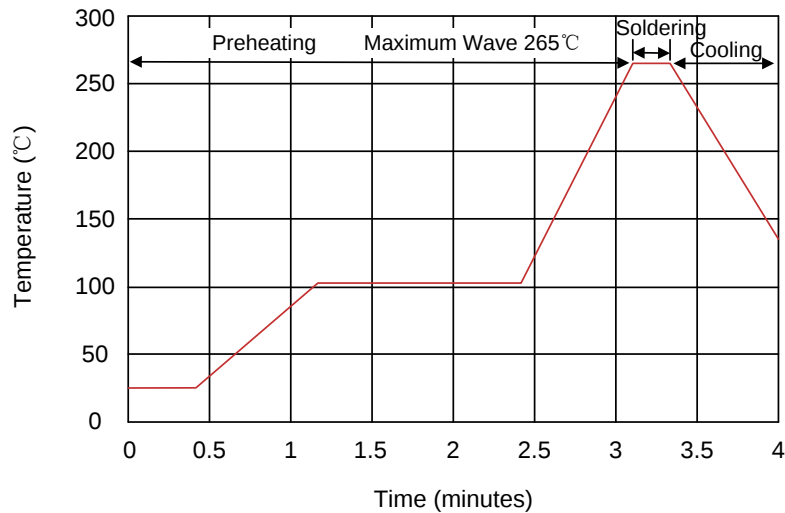


| Item             | Conditions |
|------------------|------------|
| Peak Temperature | 265°C      |
| Dipping Time     | 10 seconds |
| Soldering        | 1 time     |

## Marking Code

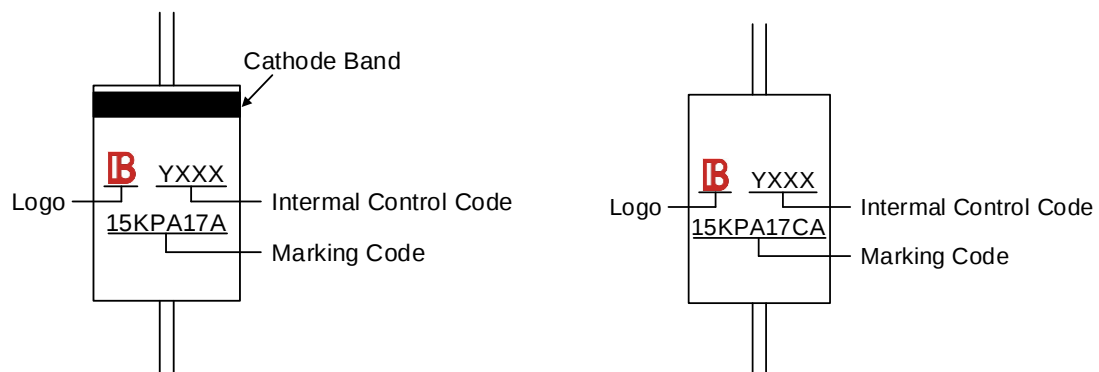

## Part Number Code

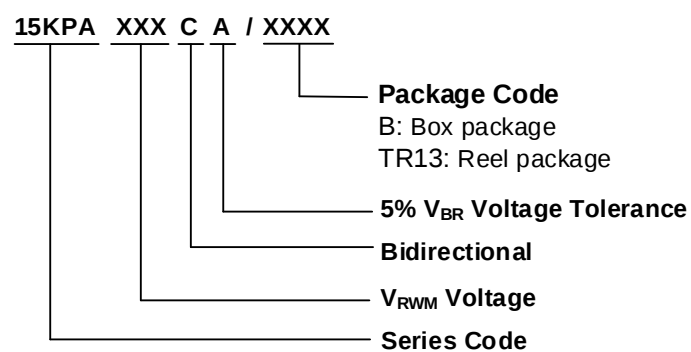

## Ordering Code for Different Package

Box package: Add suffix "/B" at the end of the part number, such as 15KPAXXXCA/B

Reel package: Add suffix "/TR13" at the end of the part number, such as 15KPAXXXCA/TR13

## Packaging

| Tape | Symbol           |  | Dimension (mm) |
|------|------------------|--|----------------|
|      | A                |  | 10.0±0.5       |
|      | B                |  | 53.0±1.0       |
|      | Z                |  | 1.2Max.        |
|      | T                |  | 6.0±0.4        |
|      | E                |  | 0.8Max.        |
|      | L1-L2            |  | 1.0Max.        |
| Box  | L                |  | 250.0±5.0      |
|      | W                |  | 75.0±5.0       |
|      | H                |  | 114.0±5.0      |
|      | Quantity: 300PCS |  |                |
| Reel | D                |  | 330.0±3.0      |
|      | D0               |  | 16.4±2.0       |
|      | D1               |  | 86.0±2.0       |
|      | W1               |  | 76.0±3.0       |
|      | Quantity: 800PCS |  |                |

