


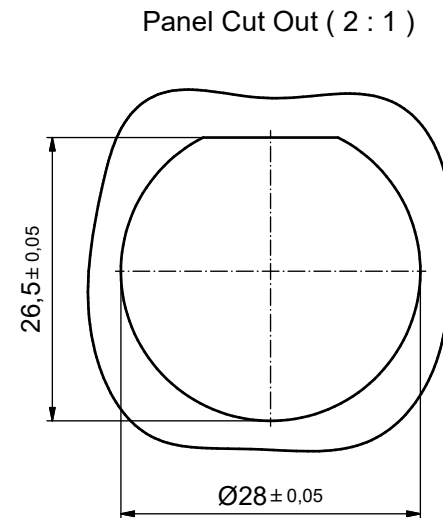
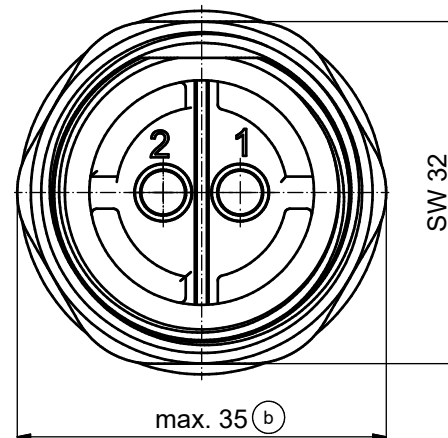
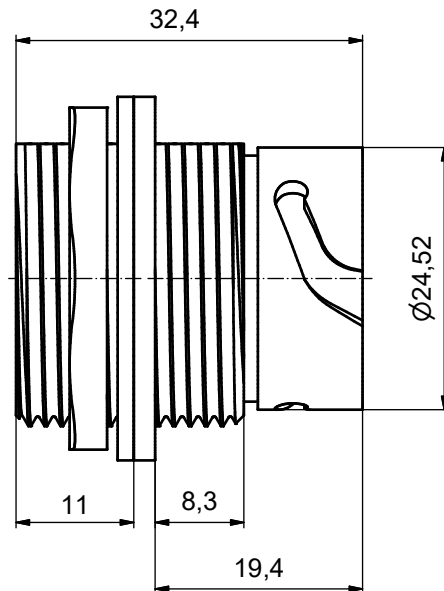


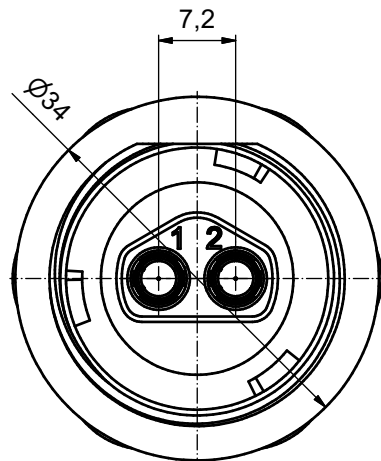

2 CONTACTS WILL BE SUPPLIED LOOSE




STRIPPING DIMENSIONS



NOTES:

- MATERIAL AND FINISH:**
 - RECEPTACLE HOUSING: PA GF (BLACK); UL94 V-0; UL (f1) RATED
 - PANEL NUT: BRASS; FINISH: NICKEL PLATED
 - PANEL GASKET: SILICONE; COLOR: WHITE
- HIGH POWER CONTACTS; CRIMP; 30A**
 - FOR USE WITH CABLE AWG 8* - 10
 - MATERIAL: COPPER ALLOY
 - PLATING, MATING AREA: GOLD FLASH over NICKEL
 - PLATING, TERMINATION SIDE: 160-240µin TIN over 80µin NICKEL
 - CONTACTS WILL BE SUPPLIED LOOSE
 - CRIMPING: USE CRIMP TOOL 360X10409X WITH TOOL INSERT 360X20029X
 - SELECTOR SETTINGS: 5 FOR AWG 8*; 4 FOR AWG 10
- OPERATING TEMPERATURE: -40°C to +100°C**
- WORKING VOLTAGE: 48V AC/DC**
- CONNECTOR CAN BE FRONT MOUNTED TO A MAXIMUM PANEL THICKNESS OF 5.9mm**
CONNECTOR CAN BE REAR MOUNTED TO A MAXIMUM PANEL THICKNESS OF 3.2mm
- IP67 RATED WHEN COVERED OR FULLY MATED WITH THE APPROPRIATE MATING CONNECTOR**
- *NOTE: FOR AWG 8 STRANDED 19/21, 37/24 and 65/26 WIRE ONLY**

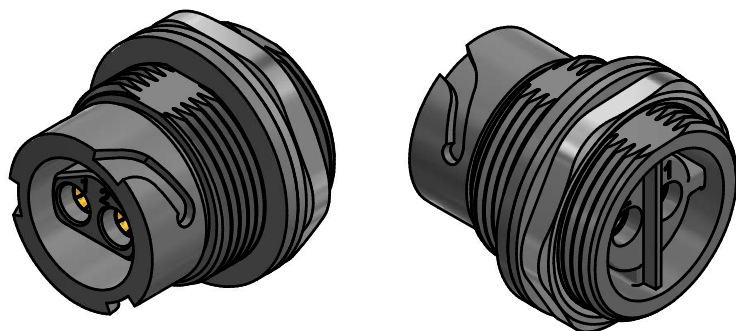

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				dim. in mm		scale:	2:1	
						material:	SEE NOTES	
						title:	IP67 POWER BAYONET 2pos. SOCKET KIT / CRIMP panel mount	
						dwg no:	17K1A476	
1 x b	Ä21-0426	05.11.2021	Bub	date	name	drawn	27.10.2015	Lehmenkühler
a	Original			appd.		27.10.2015	Koch	
rev.	description	date	name	norm				
				d-old				
DO NOT ALTER CAD DRAWING BY HAND						DIN-A3		
						sh: 1		
						part no:	17-400493	

CONEC