




SHUR-PLUG 156

TE Internal #: 170020-1
Shur-Plug Terminal, 3.56 mm [.14 in] Pin Diameter, 20 – 14 AWG, .5 – 2.27 mm² Wire, 1021 – 4106 CMA, 17 mm [.669 in] Length, SHUR-PLUG 156

[View on TE.com >](#)

Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules

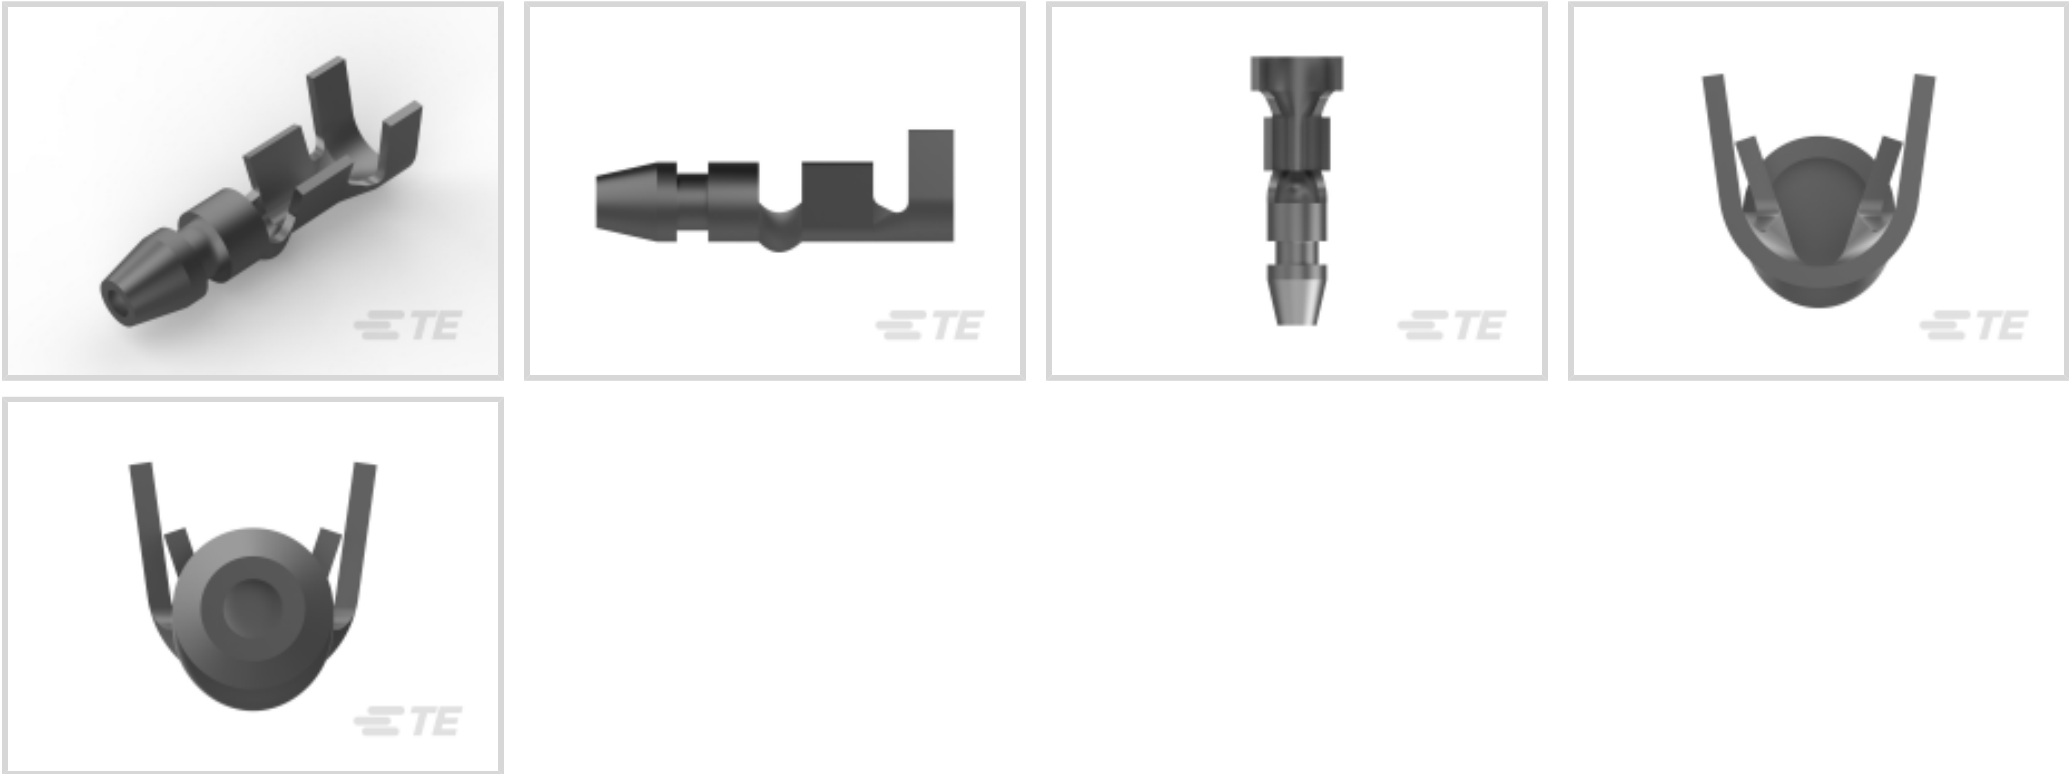

Crimp Wire Terminal Type: **Shur-Plug Terminal**
Mating Pin Diameter: **3.56 mm [.14 in]**
Compatible Insulation Diameter Range: **2.2 – 3.1 mm, 3.1 mm [.087 – .122 in, .122 in]**
Wire Size: **.5 – 2.27 mm²**

Features

Product Type Features

Compatible With Discrete Wire Type	Stranded
------------------------------------	----------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Contact Features

Crimp Wire Terminal Type	Shur-Plug Terminal
Mating Pin Diameter	3.56 mm[.14 in]
Barrel Type	Open
Terminal Plating Material	Tin
Terminal Orientation	Straight

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Compatible Insulation Diameter Range	2.2 – 3.1 mm, 3.1 mm[.087 – .122 in][.122 in]
Wire Size	1021 – 4106 CMA



Terminal Material Thickness	5.03 mm[.198 in]
Overall Product Length	17 mm[.669 in]

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Packaging Features

Packaging Method	Bag
------------------	-----

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



Also in the Series | SHUR-PLUG 156

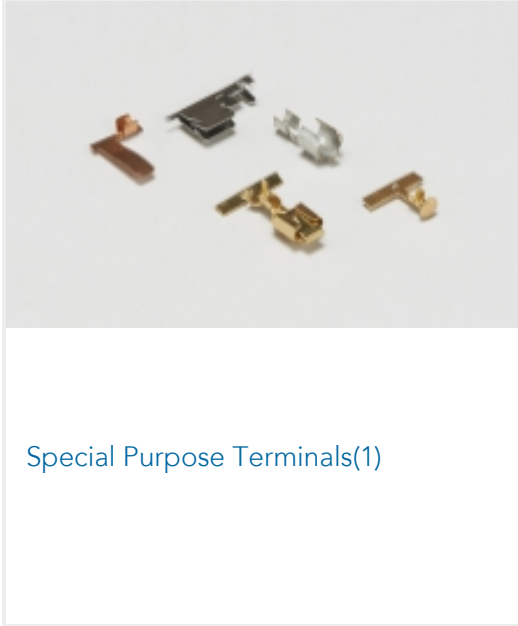

Customers Also Bought

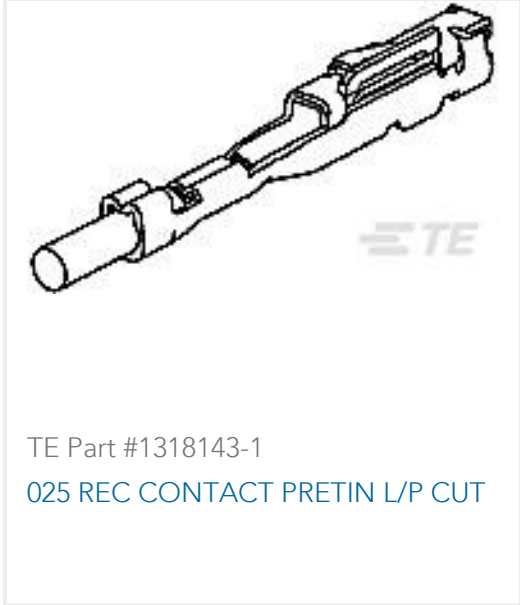



Documents

Product Drawings

SHUR PLUG 20-14 MM2 TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_170020-1_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_170020-1_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_170020-1_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Product Specification

English

4mm DIA. SHUR & RECEPTACLE

English

4mm DIA. SHUR & RECEPTACLE

Japanese

Product Specification

Japanese

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

Instruction Sheet (non U.S.)

Japanese