




Connectors > Contacts > Connector Contacts

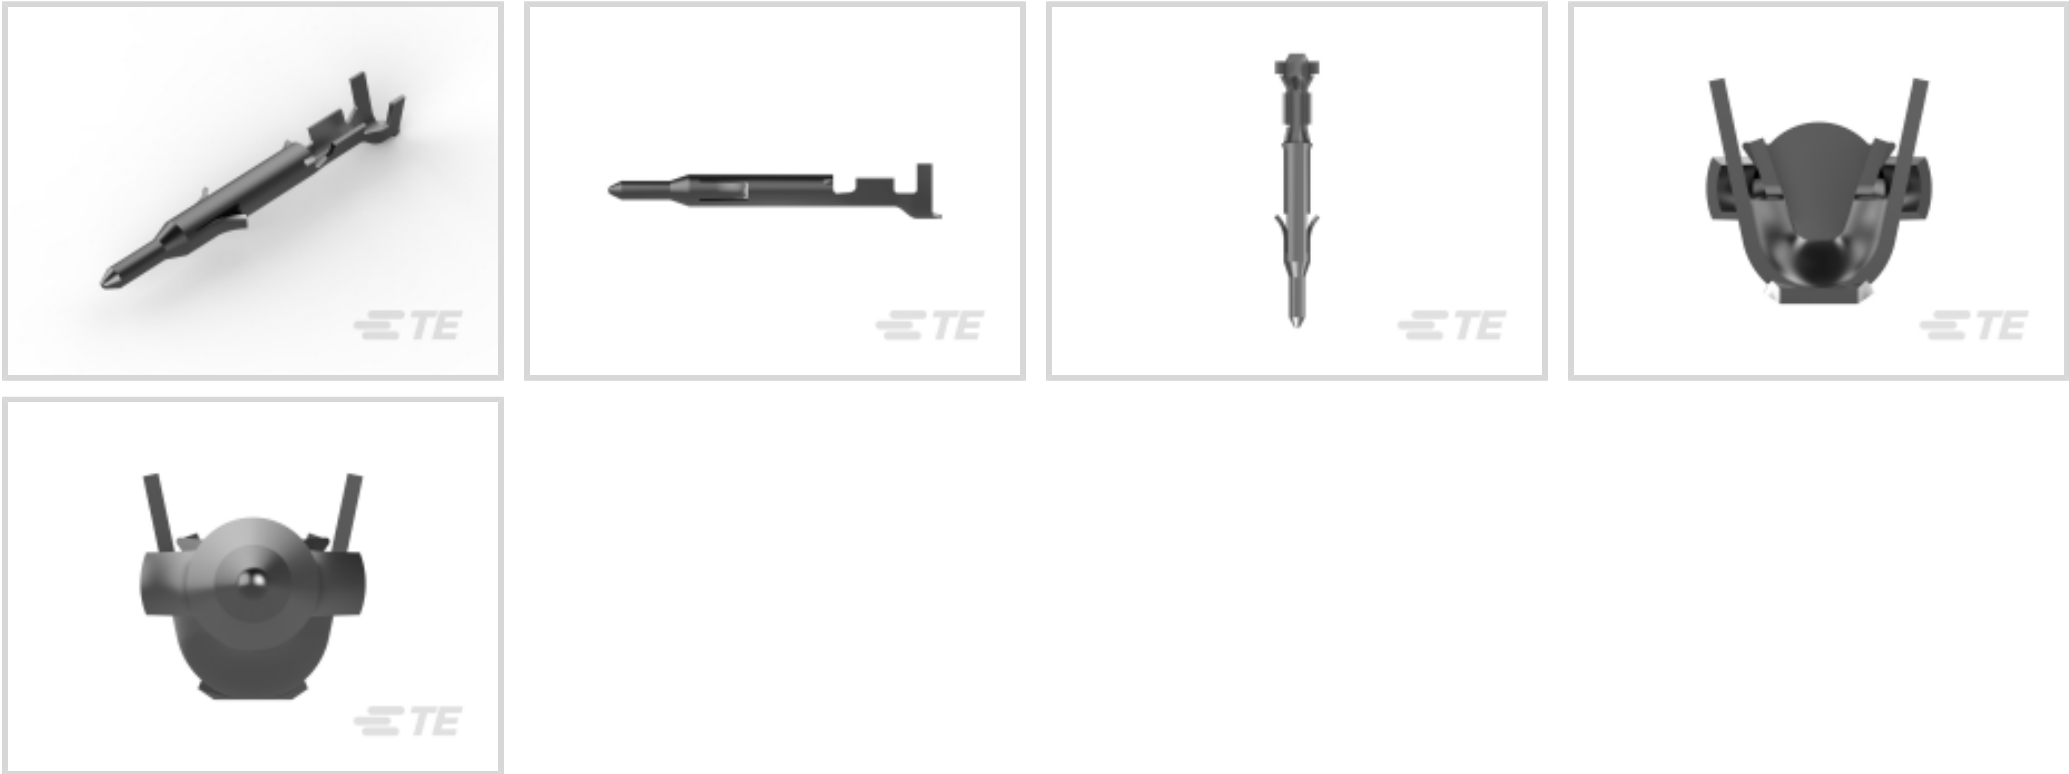

Contact Type: **Pin**

Contact Mating Area Plating Material: **Tin (Sn)**

Wire Contact Termination Area Plating Material: **Pre-Tin**

Operating Voltage: **600 VDC**

Features

Product Type Features

Discrete Wire Type	Stranded
--------------------	----------

Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

Contact Features

Barrel Type	Open
Contact Type	Pin
Contact Mating Area Plating Material	Tin (Sn)
Wire Contact Termination Area Plating Material	Pre-Tin
Contact Retention Within Housing	With
Contact Base Material	Brass
Contact Current Rating (Max)	7 A
Mating Pin Diameter	1 mm[.039 in]
Contact Mating Area Plating Material Thickness	.8 µm[31.49 µin]
Wire Contact Termination Area Plating Thickness	.8 µm[31.49 µin]
Contact Orientation	Straight



Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Wire Size	.12 – .35 mm ²
Compatible Insulation Diameter Range	1.19 – 1.75 mm[.047 – .069 in]

Usage Conditions

Operating Temperature Range	-20 – 105 °C[-4 – 221 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

Packaging Features

Packaging Quantity	300
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

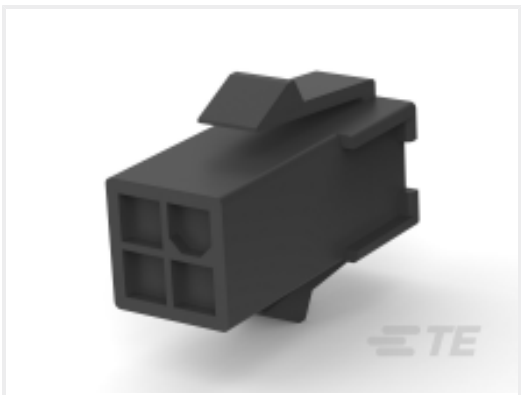 TE Part # 1-172336-2 UNIVERSAL MATE-N-LOK PLUG 2P	 TE Part # 1-172159-2 MINI UNIVERSAL M-N-L CAP 4P	 TE Part # 1-172330-9 UNIVERSAL MATE-N-LOK CAP 4P	 TE Part # 1-172158-2 MINI-U-M-N-L 3P CAP RED
 TE Part # 1-172332-9 MUMNL PM CAP 9P	 TE Part # 1-172159-9 MINI UNIVERSAL M-N-L CAP 4P	 TE Part # 172166-1 3 CIR UNIV M-N-L PLUG	 TE Part # 172343-1 MINI UNIVERSAL M-N-L HOUSING
 TE Part # 172158-1 3 CIR UNIV M-N-L CAP	 TE Part # 172162-1 12 CIR UNIV M-N-L CAP	 TE Part # 172165-1 2 CIR UNIV M-N-L PLUG NATL	 TE Part # 172328-1 MINI UNIVERSAL MATE-N-LOK CAP HOUSING 2P
 TE Part # 172327-1 UNIV M-N-L HSG	 TE Part # 172171-1 15 CIR UNIV M-N-L PLUG	 TE Part # 1-172164-2 MINI UNIVERSAL M-N-L PLUG 1P	 TE Part # 1-172169-9 9 POS TR MINI UNIV






TE Part # 1-172169-2
MINI UNIVERSAL M-N-L PLUG 9P

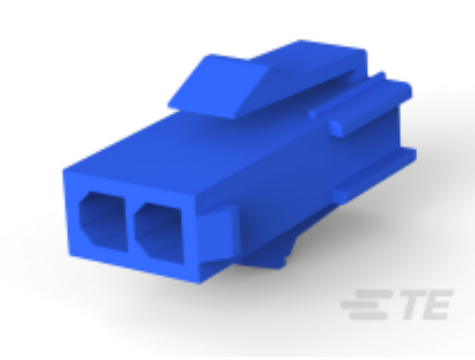

TE Part # 1-172157-6
2CIR MINI U-M-N-L CAP BLUE



TE Part # 1-172158-6
MINI-U-M-N-L 3P CAP BLUE

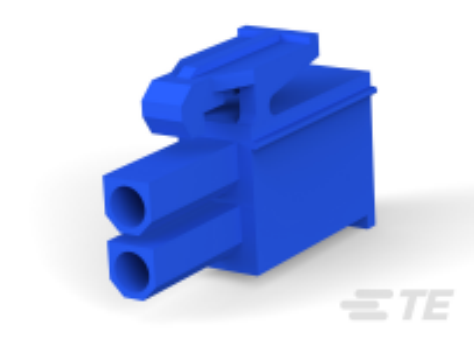


TE Part # 1-172336-6
UNIVERSAL MATE-N-LOK PLUG 2P

Also in the Series | Mini-Universal MATE-N-LOK



Connector Contacts(89)

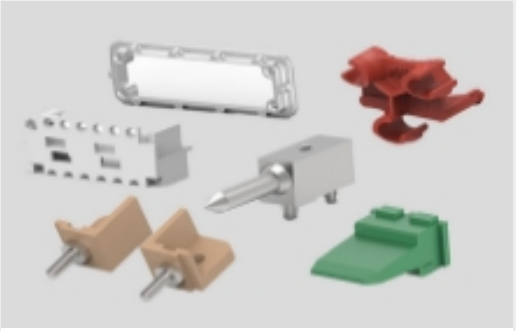

Connector Hardware(4)



Connector Strain Relief(2)



Power Contacts(89)



Rectangular Connector Housings(104)



Rectangular Power Connectors(196)



Standard Rectangular Connectors(104)

Customers Also Bought



TE Part #172158-1
3 CIR UNIV M-N-L CAP



TE Part #172161-1
9 CIR UNIV M-N-L CAP




TE Part #172165-1
2 CIR UNIV M-N-L PLUG NATL



TE Part #172167-1
4 CIR UNIV M-N-L PLUG



TE Part #172169-1
9 CIR UNIV M-N-L PLUG

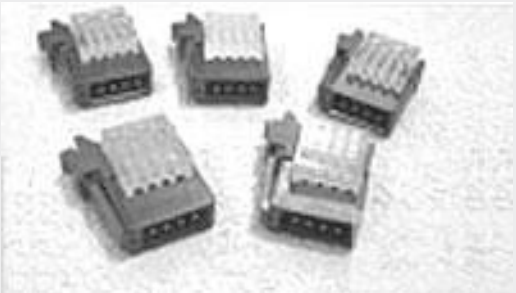


TE Part #1473562-3
RITS CONN. PLUG ASSY 3P YELLOW



TE Part #1473574-4
RITS.JUNCTION BOX 4D 4P P/M



TE Part #1-2040021-4
DYNAMIC D-5200S DUMMY REC HSG 4P CUTTING

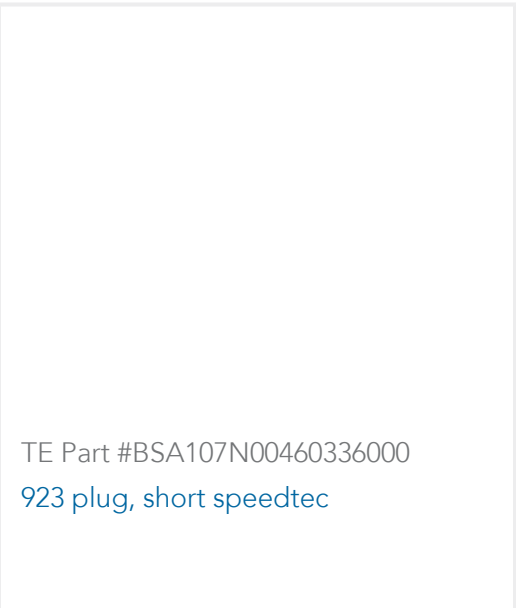

Documents

Product Drawings

MINI UNIVERSAL M-N-L PIN LP

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_170363-1_1_c-170363-1-1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_170363-1_1_c-170363-1-1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_170363-1_1_c-170363-1-1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Crimping of Mini-Universal MATE-N-LOK Contact

Japanese

Application Specification

Japanese

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

Mini-Universal MATE-N-LOK Connector

Japanese

Agency Approvals

UL Report

English