1717396-2 ✔ ACTIVE

AMP | 0.64/025 Connector System



TE Internal #: 1717396-2

Vertical, Wire-to-Board, 16 Position, 2 Rows, 2.2mm [.087in] Centerline, Tin (Sn), Printed Circuit Board, Signal, Black, 0.64/025 Connector System

View on TE.com >

Automotive Parts > Automotive Connectors > Automotive Headers > Press-Fit & SMT Header

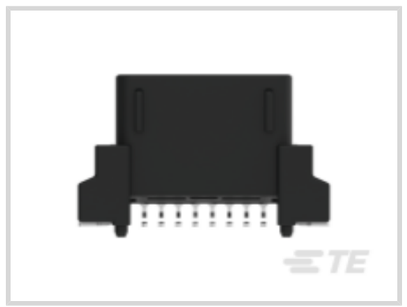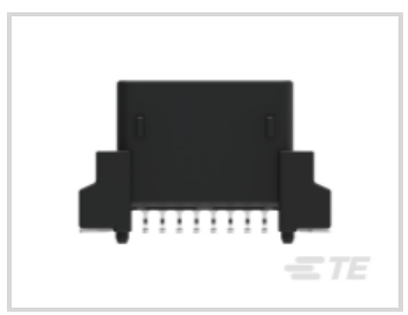

PCB Mount Orientation: **Vertical**

Termination Method to PCB: **Surface Mount**

Sealable: **No**

Centerline (Pitch): **2.2 mm [.087 in]**

Connector System: **Wire-to-Board**

All Press-Fit & SMT Header (22)

Features

Product Type Features

Connector Product Type	Connector Assembly
Mixed & Hybrid Header	No
Header Type	Fully Shrouded
Connector Shape	Rectangular
Sealable	No
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Signal Positions	16
Number of Sections	1
PCB Mount Orientation	Vertical
Number of Positions	16
Number of Rows	2

Electrical Characteristics

Operating Voltage	12 VDC
Voltage Rating (Max)	12 VDC
Nominal Voltage Architecture	12 V

Body Features

Primary Product Color	Black

Contact Features

Mating Tab Width	.64 mm[.025 in]
Mating Tab Thickness	.64 mm[.025 in]
Contact Type	Tab
Contact Mating Area Plating Material	Tin (Sn)

Termination Features

Termination Method to PCB	Surface Mount

Mechanical Attachment

Panel Mount Feature	Without
Mating Retention Type	Locking Interface
PCB Mount Retention	Without
Mounting Holes	Without
Mating Alignment	With
PCB Mount Alignment	With
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	2.2 mm[.087 in]

Dimensions

Connector Width	32.6 mm[1.283 in]
Connector Length	16.2 mm[.638 in]
Profile Height from PCB	20 mm[.787 in]

Usage Conditions

Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Operation/Application

Solder Process	Reflow Solder Capable
Shielded	No
Circuit Application	Signal

Packaging Features

Packaging Quantity	16
Packaging Method	Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # CAT-T319-CH8172
TH/.025 CONNECTOR SYSTEM, HOUSING

Also in the Series | 0.64/025 Connector System

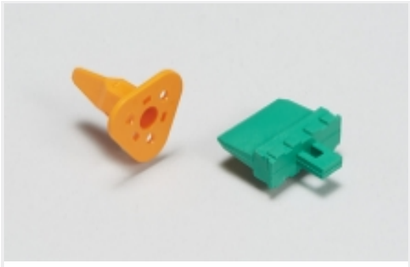


Automotive Connector Locks & Position Assurance(1)



Automotive Housings(174)



Automotive Seals & Cavity Plugs(2)

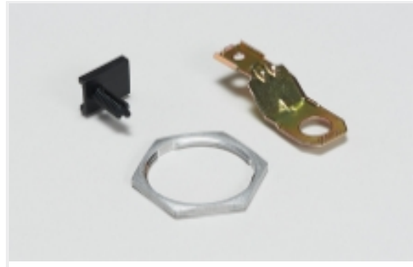


Other Automotive Connector Accessories(4)

Customers Also Bought



TE Part #87985-4
04 MODI BDMNT RCPT SR .156CL

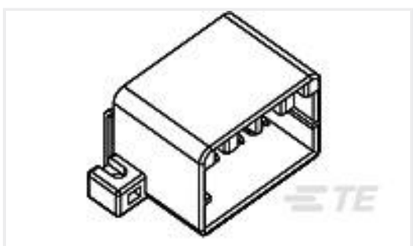

TE Part #175973-2
.040 MLC-2 CAP ASS'Y 8P (H)



TE Part #338069-4
MICRO-MATCH SMD FTE



TE Part #1-1719101-1
PCB 9.5 TERMINAL SN

TE Part #2005342-5
2POS MQS TAB SEALED

TE Part #9-2379267-2
025 SMD 36P HDR ASSY V-TYPE TUBE

TE Part #9-2379263-1
025 SMD 24P HDR ASSY V-TYPE CODE A TUBE

TE Part #9-2379263-2
025 SMD 24P HDR ASSY V-TYPE CODE B TUBE



TE Part #9-2379270-1
025 SMD 40P HDR ASSY V-TYPE CODE A TUBE



TE Part #9-2379270-2
025 SMD 40P HDR ASSY V-TYPE CODE B TUBE

Documents

Product Drawings

0.64 SMD 16P CAP ASSEMBLY V-TYPE

English

CAD Files

Customer View Model

ENG_CVM_CVM_1717396-2_C.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1717396-2_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1717396-2_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Application Specification

Japanese

.025 IDC Connectors

Japanese

Crimping of 025 Receptacle Contact

Japanese

Application Specification

Japanese

CRIMPING OF 0.64III RECEPTACLE CONTACT

Japanese

Application Specification

Japanese

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

Instruction Sheet (non U.S.)

English