



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Right Angle**

Connector System: **Wire-to-Board**

Number of Positions: **4**

Centerline (Pitch): **5.08 mm [.2 in]**

Features

Product Type Features

Connector Shape	Rectangular
PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Loaded Positions	4
PCB Mount Orientation	Right Angle
Number of Positions	4
Number of Rows	1
Number of Power Positions	4

Electrical Characteristics



Operating Voltage	250 VAC
-------------------	---------

Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Contact Layout	Inline
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin (Sn)
Contact Type	Pin
Contact Current Rating (Max)	15 A
PCB Contact Termination Area Plating Material	Pre-Tin

Termination Features

Termination Post & Tail Length	4.1 mm[.161 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Retention Type	Positive Lock
Mating Alignment Type	Polarization
PCB Mount Alignment	Without
Mating Retention	With
PCB Mount Retention	Without
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Centerline (Pitch)	5.08 mm[.2 in]
Housing Material	Nylon 66 GF

Dimensions

Connector Width	10.2 mm[.4 in]
Connector Height	8.8 mm[.346 in]
Connector Length	25.3 mm[.99 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]

Operation/Application



Shielded	No
Circuit Application	Power

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
UL Rating	Certified, Recognized
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-2

Packaging Features

Packaging Quantity	200
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

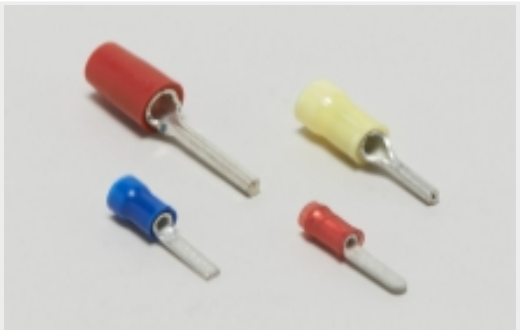
This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

 TE Part # 174804-1 M-N-L PIN HDR W/FIX BELT H 4P	 TE Part # 350544-1 04P CMNL HDR ASSY LONG NATL	 TE Part # 350543-1 04P CMNL HDR ASSY SHORT NATL	 TE Part # 350211-1 04P CMNL HDR ASSY PC
 TE Part # 172294-1 4 POS SR MATE-N-LO	 TE Part # 350424-1 04P CMNL HDR ASSY PC NATL	 TE Part # 174520-1 4P CMNL PIN HDR ASSY V	 TE Part # 174552-1 4P C-MNL PIN HDR R/A

Also in the Series | Commercial MATE-N-LOK

 Connector Contacts(145)	 Connector Hardware(1)	 Crimp Wire Pins, Tabs & Ferrules(2)	 Power Contacts(141)
 Rectangular Connector Housings(118)	 Rectangular Power Connectors(181)	 Standard Circular Connectors(2)	

Customers Also Bought



Documents

Product Drawings

4P C-M-N-L HEADER ASSY H

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_172349-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_172349-1_A.3d_stp.zip

English

Customer View Model

ENG_CVM_172349-1_A.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_172349-1_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_172349-1_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_172349-1_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Application Specification

English



Agency Approvals

UL Report

English