



Automotive Parts > Automotive Connectors > Automotive Headers > Low & Medium Power Header



PCB Mount Orientation: **Horizontal**
Contact Current Rating (Max): **1 A**
Termination Method to PCB: **Through Hole - Solder**
Sealable: **No**
Centerline (Pitch): **3.5 mm [.138 in]**

[All Low & Medium Power Header \(64\)](#)

Features

Product Type Features

Connector Product Type	Connector Assembly
Mixed & Hybrid Header	No
Header Type	Fully Shrouded
Connector Shape	Rectangular
Sealable	No
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Signal Positions	24
Number of Sections	2
PCB Mount Orientation	Horizontal
Number of Positions	24
Number of Rows	2



Electrical Characteristics

Operating Voltage	12 VDC
Voltage Rating (Max)	12 VDC
Nominal Voltage Architecture	12 V

Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Mating Tab Width	1.8 mm[.07 in]
Mating Tab Thickness	.64 mm[.025 in]
Contact Type	Tab
Contact Current Rating (Max)	1 A
Contact Mating Area Plating Material	Tin (Sn)

Termination Features

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Mechanical Attachment

Panel Mount Feature	Without
Mating Retention Type	Locking Interface
PCB Mount Retention	Without
Mounting Holes	With
PCB Mount Retention Type	Mounting Hole
Mating Alignment	With
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	3.5 mm[.138 in]
--------------------	-----------------

Dimensions

Connector Width	18.5 mm[.728 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Profile Height from PCB	15.8 mm[.622 in]
Connector Length	78.6 mm[.309 in]

Usage Conditions

--	--



Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Operation/Application

Solder Process	Wave Solder Capable
Shielded	No
Circuit Application	Power

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

Packaging Features

Packaging Quantity	30
Packaging Method	Tube

Other

Interface Number	174465
------------------	--------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on




requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 173852-5
070 MULTILOCK PLUG 14P BLUE

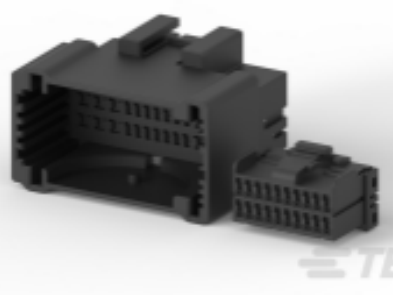

TE Part # CAT-M9194-CH8172
MULTILOCK, CONNECTOR HOUSING

Also in the Series | Multilock Connector System



Automotive Housings(140)



Automotive Signal & Power Connector Housings(136)



Other Automotive Connector Accessories(5)


Customers Also Bought




TE Part #CAT-SIGH262
Signal Header




TE Part #2306368-1
2P,MATE-AX,HDR ASSY,90DEG,COD A

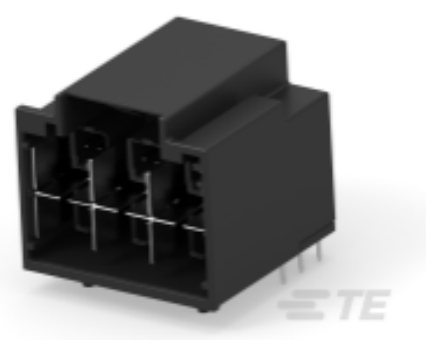

TE Part #1-2339800-1
MATENET 2X3 HEADER, 90DEG, CODE A

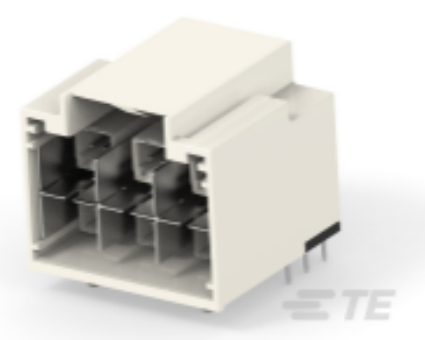

TE Part #1-2339800-2
MATENET 2X3 HEADER, 90DEG, CODE B

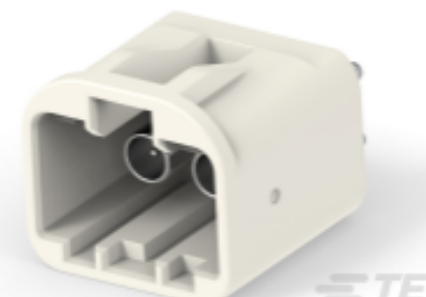

TE Part #2357501-2
2P,MATE-AX,HDR ASSY,180DEG,COD B




TE Part #1-2378550-2
4P MATE-AX,HDR ASSY,180DEG,COD B,CAP



TE Part #2404815-1
1X4 COMBO,MATE-AX,HDR ASSY, SEALED,COD A



TE Part #2408630-2
TAB6.0X0.8,MS

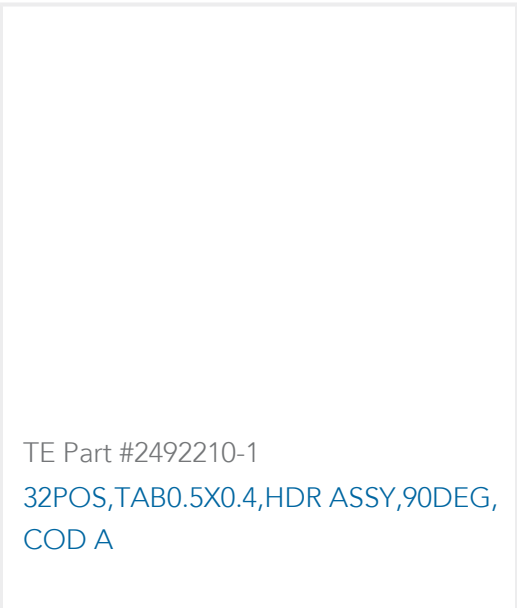

Documents

Product Drawings

070 MLC 24P CAP ASSY NATURAL

Japanese

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_173864-1_H.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_173864-1_H.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_173864-1_H.3d_stp.zip

English

3D PDF

English

Customer View Model

ENG_CVM_173864-1_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_173864-1_E.3d_igs.zip

English

Customer View Model

ENG_CVM_173864-1_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Product Specification

Japanese

.070 Series Multilock I/O Connector (MLC) MK-II for P.C.B.

Japanese

Product Specification

173864-1

Horizontal, Wire-to-Board, 24 Position, 2 Rows, 3.5mm [.138in] Centerline, Tin (Sn),
Printed Circuit Board, Multilock Connector System



Japanese