



Automotive Parts > Automotive Connectors > Automotive Housings



Nominal Voltage Architecture: 12 V
Connector & Housing Type: **Housing for Female Terminals**
Number of Positions: 4
Sealable: **Yes**
Operating Temperature Range: -40 – 125 °C [-40 – 257 °F]

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	4
Number of Rows	1

Electrical Characteristics

Operating Voltage	125 VDC
Nominal Voltage Architecture	12 V

Body Features



Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	A

Contact Features

Contact Size	1.8mm
Contact Type	Receptacle
Mating Tab Width	1.8 mm[.07 in]
Contact Current Rating (Max)	13 A

Mechanical Attachment

Strain Relief	Add By Accessory
Terminal Position Assurance	No
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	5 mm[.197 in]

Dimensions

Product Width	24.8 mm[.976 in]
Product Length	32.6 mm[1.28 in]
Connector Height	27.6 mm[1.09 in]

Usage Conditions

Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Operating Temperature (Max)	125 °C[257 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Packaging Features

Packaging Quantity	1000
Packaging Method	Package



Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-1414939-4
V23130C2021A412-EV-CBOX



TE Part # 184030-1
RECPT, CONTACT 070, AUPHBZ



TE Part # 184141-1
WIRE SEAL,RUBBER,SENSOR,PURPLE,LIM



TE Part # 184140-1
WIRE SEAL,RUBBER,SENSOR,ORANGE



TE Part # 171631-2
070 TAB CONT GOLD



TE Part # 184289-3
RECPT, CONTACT 070, PTPPHBZ



TE Part # 184030-3
RECPT, CONTACT 070, PTPPHBZ



TE Part # 7-1414778-3
V23130C2421A431-EV-CBOX



TE Part # 184373-2
CONTACT, RECEPTACLE, .070 TYPE



TE Part # 184149-1
4 POS. PLUG ASSY W/CPA, KEY A



TE Part # 184139-1
WIRE SEAL,RUBBER,SENSOR,BLUE



TE Part # CAT-EC7491-T273
Econoseal Receptacles and Tabs



TE Part # 184289-1
RECPT, CONTACT 070, AUPHBZ




TE Part # 184373-1
CONTACT, RECEPTACLE, .070 TYPE



TE Part # 184095-2
RECPT, CONTACT .070, PTPPHBZ

Also in the Series | Sealed Sensor Connector SSC System

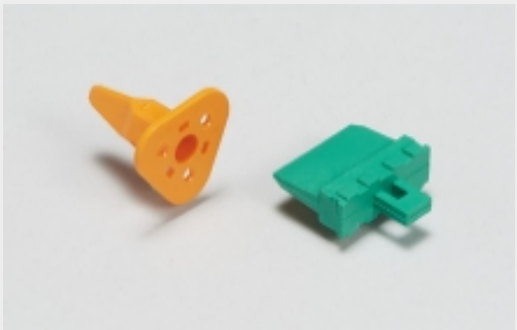

Automotive Connector Locks & Position Assurance(2)



Automotive Housings(34)



Automotive Seals & Cavity Plugs(3)



Automotive Signal & Power Connector Housings(33)

Customers Also Bought




TE Part #1SNA115409R2600
MB4/6.L5




TE Part #1SNG626065R0000
EP-SGL-M25-GR-C



TE Part #2-34072-2
SPLICE,PG BUTT 12-10

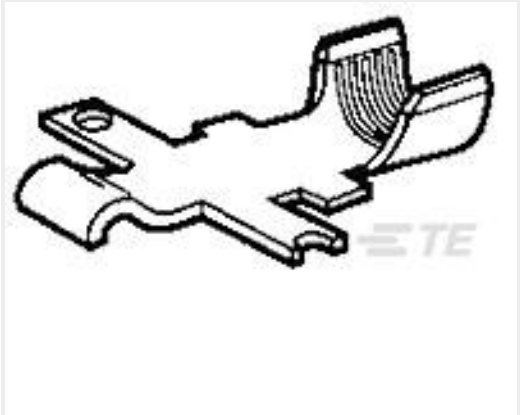

TE Part #53880-2
CONTACT,PWR LK,SRS2,STRIP,CRMP

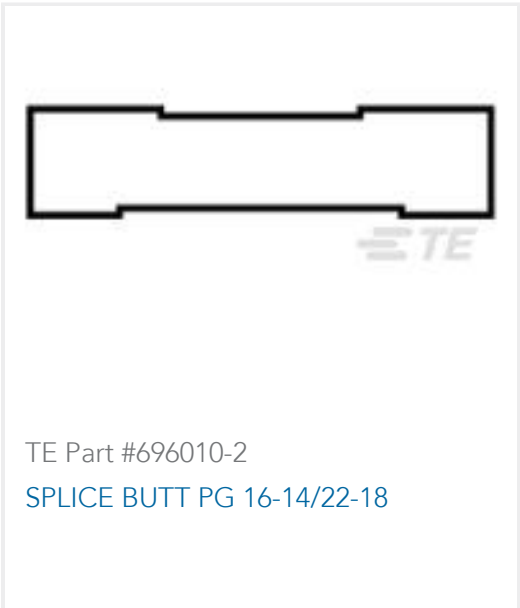

Documents

Product Drawings

4 POS. PLUG ASSY, KEY A

English

4 POS. PLUG ASSY, KEY A

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_184046-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_184046-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_184046-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English



Positioning the Double Lock Plate

English