




Automotive Parts > Automotive Connectors > Automotive Housings

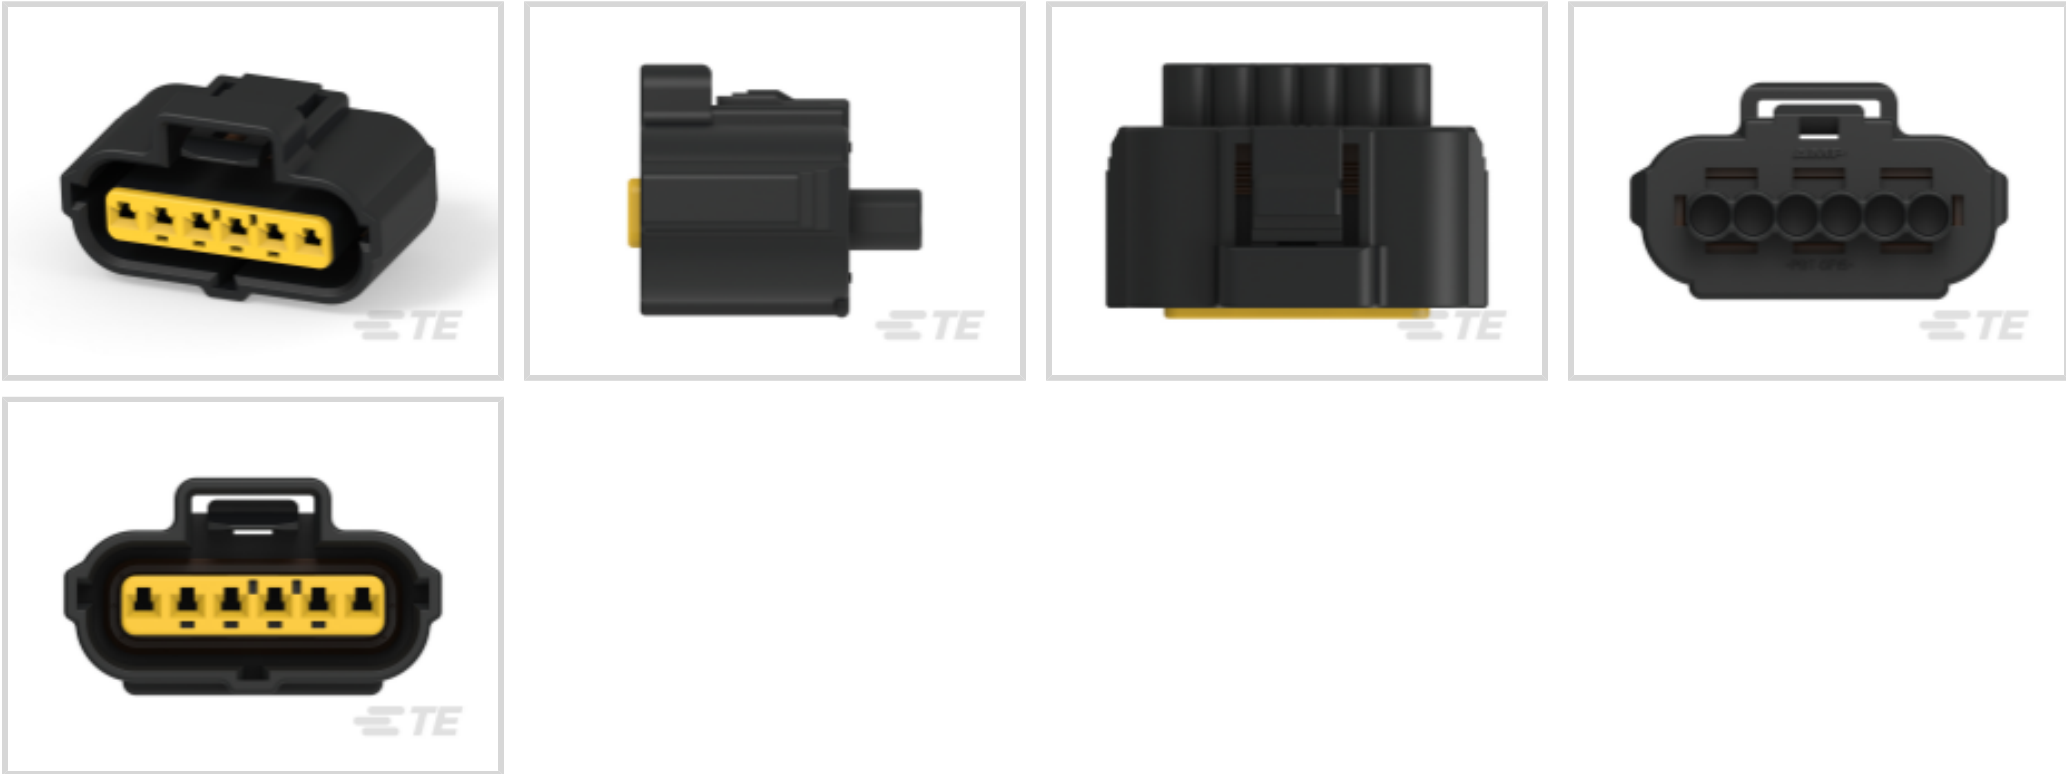

Nominal Voltage Architecture: 12 V
Connector & Housing Type: **Housing for Female Terminals**
Number of Positions: 6
Sealable: **Yes**
Operating Temperature Range: -40 – 125 °C [-40 – 257 °F]

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	6
Number of Rows	1

Electrical Characteristics

Operating Voltage	125 VDC
Nominal Voltage Architecture	12 V

Body Features



Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	A

Contact Features

Contact Size	1.8mm
Contact Type	Receptacle
Mating Tab Width	1.8 mm[.07 in]
Contact Current Rating (Max)	13 A

Mechanical Attachment

Strain Relief	Add By Accessory
Terminal Position Assurance	No
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	5 mm[.197 in]

Dimensions

Product Width	27.6 mm[1.087 in]
Product Length	43.2 mm[1.7 in]
Connector Height	24.8 mm[.98 in]

Usage Conditions

Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Operating Temperature (Max)	125 °C[257 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Packaging Features

Packaging Quantity	800
Packaging Method	Package



Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 184158-1
2 POS. END CAP HSG., KEY H




TE Part # 184218-1
2 POS. PLUG ASSY, KEY D



TE Part # 184176-1
2 POS. END CAP ASSY., KEY A



TE Part # 184006-2
2 POS. PLUG ASSY, KEY D, GRAY



TE Part # 184161-1
2 POS., END CAP HSG., KEY L



TE Part # 184165-1
2 POS. CAP HSG., KEY C



TE Part # 184014-1
2 POS. PLUG ASSY, KEY H, BLACK



TE Part # 184151-1
2 POS. END CAP HSG., KEY A




TE Part # 184008-1
2 POS. PLUG ASSY, KEY E, BLACK



TE Part # 184175-1
2 POS. CAP LP



TE Part # 184116-2
2 POS. PLUG ASSY, KEY H 1/2

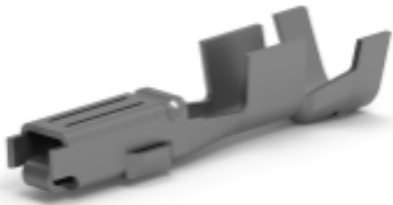


TE Part # 184289-3
RECPT, CONTACT 070, PTPPHBZ




TE Part # 172748-2
E-J MK-2 070 CAVITY PLUG




TE Part # 184030-3
RECPT, CONTACT 070, PTPPHBZ



TE Part # 184157-1
2 POS. END CAP HSG., KEY G

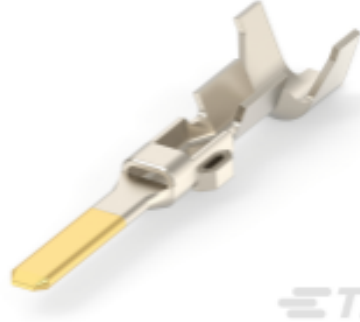

TE Part # 171631-2
070 TAB CONT GOLD




TE Part # 184136-1
6 POS./4 CIRC. PLUG ASSY,KEY D



TE Part # 184167-1
2 POS. CAP HSG., KEY E



TE Part # 184216-1
2 POS. PLUG ASSY., KEY C




TE Part # 184000-3
2 POS. PLUG ASSY, KEY A, NAT

Also in the Series | Sealed Sensor Connector SSC System



Automotive Connector Caps & Covers
(2)

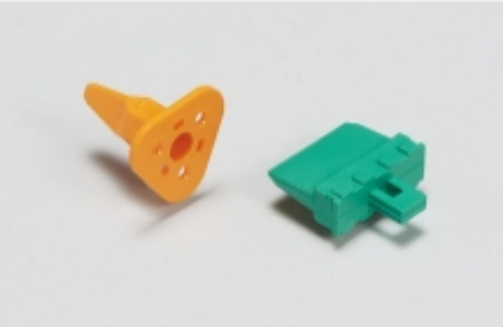


Automotive Connector Locks & Position Assurance(2)



Automotive Housings(34)



Automotive Seals & Cavity Plugs(3)

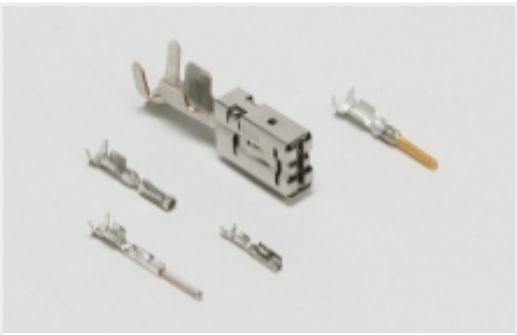

Automotive Terminals(5)

Customers Also Bought




TE Part #165045
SOLIS 16-14 WIRE PIN, SHORT




TE Part #173063-2
.070 ECONOSEAL 2P CAP HSG



TE Part #CAT-T4827-T273
TIMER, RECEPTACLE AND TAB

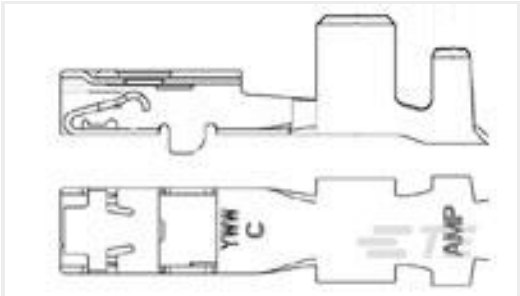


TE Part #1326030-8
2.8MM RECP,UNSEAL,10-12AWG,REV

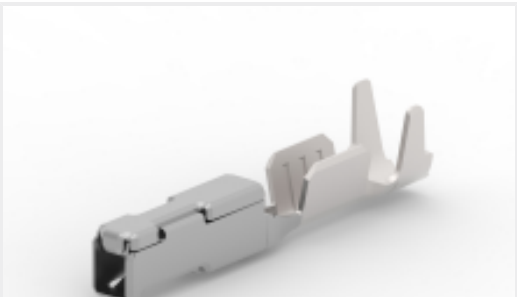

TE Part #1456968-3
CONTACT,FEMALE, 0.64, 20 TO 22 AWG, AG



TE Part #1623155-1
CRG0805 1% 220K

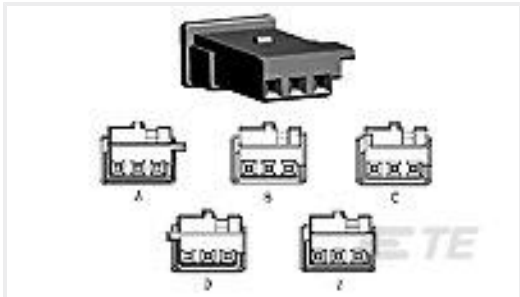

TE Part #1-1718346-3
3POS MQS REC COD A



TE Part #2-1823440-3
22POS, MIXED,REC HSG,ASSY, SEALED



TE Part #1825290-3
MHS233RA04=DP3T SL SW R/A AG

Documents

Product Drawings
6 POS./6 CIRC PLUG ASSY, KEY A
English

CAD Files
3D PDF
English

Customer View Model
ENG_CVM_184060-1_C.2d_dxf.zip



English

Customer View Model

[ENG_CVM_184060-1_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_184060-1_C.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English

[Positioning the Double Lock Plate](#)

English