



MQS

TE Internal #: 185730-1
Vertical, Wire-to-Board, 3 Position, 1 Rows, 2.54mm [.1in]
Centerline, Tin (Sn), Printed Circuit Board, 7.5A Contact Current
Rating (Max), Signal

[View on TE.com >](#)

Automotive Parts > Automotive Connectors > Automotive Headers > Signal Header



PCB Mount Orientation: **Vertical**
Contact Current Rating (Max): **7.5 A**
Termination Method to PCB: **Through Hole - Solder**
Sealable: **No**
Centerline (Pitch): **2.54 mm [.1 in]**

[All Signal Header \(237\)](#)

Features

Product Type Features

Connector Product Type	Connector Assembly
Mixed & Hybrid Header	No
Header Type	Fully Shrouded
Connector Shape	Rectangular
Sealable	No
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Signal Positions	3
Number of Sections	1
PCB Mount Orientation	Vertical
Number of Positions	3
Number of Rows	1



Electrical Characteristics

Operating Voltage	12 VDC
Nominal Voltage Architecture	12 V

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Mating Tab Width	.63 mm[.025 in]
Mating Tab Thickness	.63 mm[.025 in]
Contact Type	Tab
Contact Current Rating (Max)	7.5 A
Contact Mating Area Plating Material	Tin (Sn)

Termination Features

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Mechanical Attachment

Panel Mount Feature	With
Mating Retention Type	Locking Interface
PCB Mount Retention	Without
Mounting Holes	With
Mating Alignment	With
PCB Mount Alignment	Without
Connector Mounting Type	Panel Mount

Housing Features

Centerline (Pitch)	2.54 mm[.1 in]
--------------------	----------------

Dimensions

Connector Width	22.2 mm[.87 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Profile Height from PCB	6.4 mm[.25 in]
Connector Length	14.6 mm[.57 in]

Usage Conditions

Operating Temperature (Max)	85 °C[185 °F]
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]



Operation/Application

Solder Process	Wave Solder Capable
Shielded	No
Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Packaging Features

Packaging Quantity	2500
Packaging Method	Box

Other

Interface Number	208-15515
------------------	-----------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts



TE Part # 185309-1
PLUG HOUSING 3W MQS



TE Part # 1-962755-8
MQS STIFT GEH 3P



TE Part # 1-929089-1
3POS MQS FFC REC COD A

Customers Also Bought




TE Part #691437-000
B-500-06-01



TE Part #615595-000
B-150-07-S



TE Part #380598-1
RCR AU-SPR AU-CUP 018-040

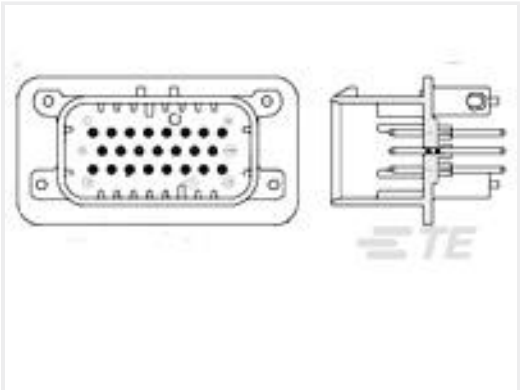

TE Part #1-776262-1
14POS,PIN DIA 1.3,HDR ASSY,
180DEG,COD 1



TE Part #5-1879225-0
CPF 0603 140K 0.1% 25PPM 1K RL



TE Part #5-1879352-5
RR02 5% 56R AMMO




TE Part #1-2208636-1
6POS,NANO MQS,HEADER ASSY



TE Part #2339204-4
4POS,TAB0.5X0.4,HDR ASSY,90 DEG,
COD A



TE Part #5352033-1
Z-PACK 2MM HM ASSY,TYPE-B 133P

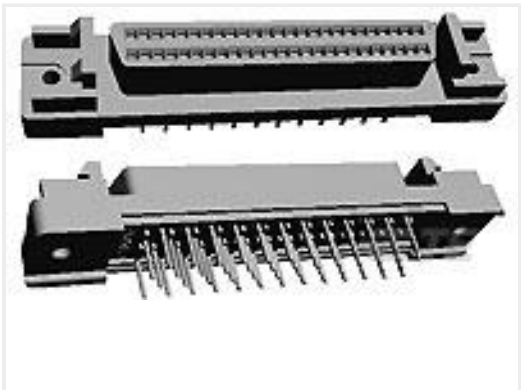

TE Part #5749069-9
100 50SR VERT RCPT ASSYY

Documents

Product Drawings
3pos MQS .63 header 180deg
English

CAD Files
Customer View Model
ENG_CVM_CVM_185730-1_O.2d_dxf.zip
English



3D PDF

3D

Customer View Model

ENG_CVM_CVM_185730-1_O.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_185730-1_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Product Specification

English

Instruction Sheets

Embase 3 Voies MQS Droite

English

Instruction Sheet (non U.S.)

English