
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST
IN	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED	01OCT2007	KP	LV
	B	ECR-07-027614	14NOV2007	KP	LV

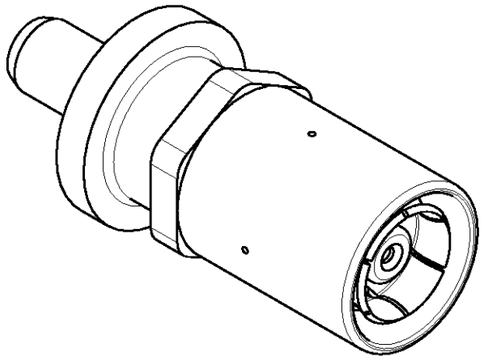

ISOMETRIC VIEW

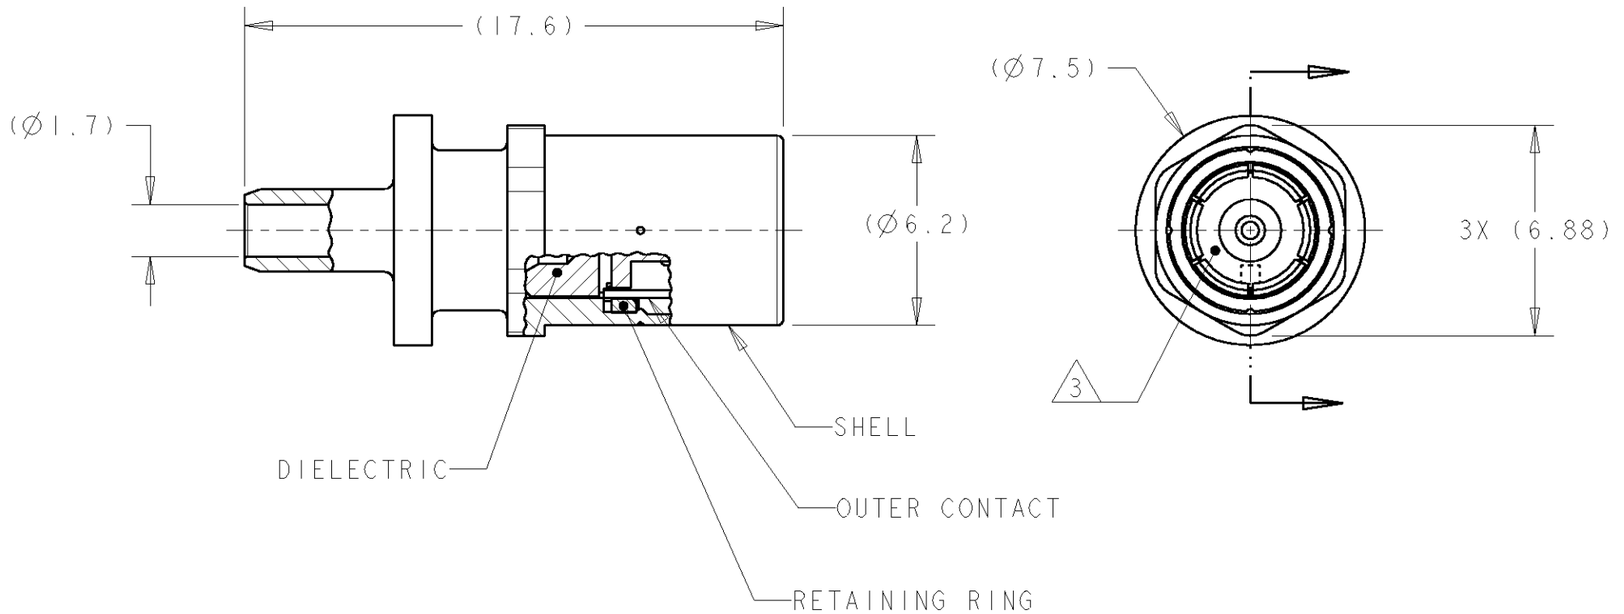

1. SHELL: ZINC.
   OUTER CONTACT: COPPER.
   RETAINING RING: BRASS.
   DIELECTRIC: POLYESTER PBT, CURRY.

2. SHELL: 2.0µm MIN TIN OVER 1.0µm MIN NICKEL, BOTH OVER 5.08µm MIN COPPER.
   OUTER CONTACT: 3.75µm MIN TIN OVER 1.27µm MIN NICKEL.
   RETAINING RING: 2.03µm MIN TIN OVER 1.27µm MIN NICKEL.

3. PLUG SUBASSEMBLY ACCEPTS JACK SUBASSEMBLIES MEETING DIN 72594-1, ROAD VEHICLES - RADIO FREQUENCY INTERFACE - DIMENSIONS AND ELECTRICAL REQUIREMENTS.

4. SEE INSTRUCTION SHEET 408-10028.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL 1

FINISH 2

DWN	01OCT2007 K.PETERSON
CHK	01OCT2007 L.VARSIK
APVD	01OCT2007 L.VARSIK
PRODUCT SPEC	-
APPLICATION SPEC	114-13157
WEIGHT	-

Tyco Electronics
Tyco Electronics
Harrisburg, PA 17105-3608

NAME
PLUG SUBASSEMBLY, RG-316 OR RG-174, SMB

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1924791	-

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV B

1924791-1
PART NUMBER