2-1473059-3 ✔ ACTIVE


Economy Power

TE Internal #: 2-1473059-3

PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin (Sn), Economy Power

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

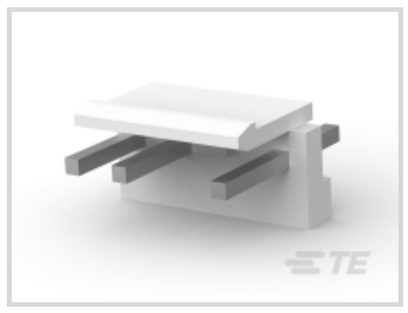





PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Wire-to-Board**

Number of Positions: **4**

Centerline (Pitch): **3.96 mm [.156 in]**

Features

Product Type Features

Connector Shape	Rectangular
PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Partially Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Loaded Positions	3
PCB Mount Orientation	Vertical
Number of Positions	4
Number of Rows	1
Number of Power Positions	4

Electrical Characteristics

Operating Voltage	250 VDC

Body Features

Primary Product Color	Natural

Contact Features

Contact Size	1.14mm
PCB Contact Termination Area Plating Material Thickness	1 µm[39.37 µin]
Contact Shape & Form	Square
Contact Layout	Inline
Contact Mating Area Length	7.7 mm[.303 in]
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin (Sn)
Contact Mating Area Plating Material Thickness	1 µm[39.37 µin]
Contact Type	Tab
Contact Current Rating (Max)	8 A
PCB Contact Termination Area Plating Material	Tin

Termination Features

Termination Post & Tail Length	3.7 mm[.146 in]
Square Termination Post & Tail Dimension	1.14 mm[.045 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Retention Type	Locking Tab
PCB Mount Alignment	Without
Mating Retention	With
PCB Mount Retention	Without
Connector Mounting Type	Board Mount
Mating Alignment	Without

Housing Features

Centerline (Pitch)	3.96 mm[.156 in]
Housing Material	PBT

Dimensions

Connector Width	8.5 mm[.334 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]

Connector Height	9.2 mm[.36 in]
Connector Length	15.78 mm[.621 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Operation/Application

Circuit Application	Power

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	500
Packaging Method	Bag

Other

Position Locations Omitted	3
Number of Blocked Positions	1

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products

will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



TE Part # 2-1123722-3
3.96 EP PLUG HSG 3P(YELLOW)



TE Part # 1744416-4
4 POS EP II HSG, GLOW WIRE

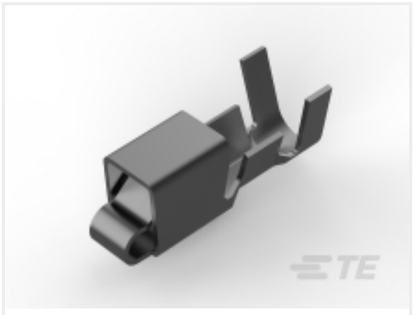

TE Part # 1123721-2
ECONOMY POWER CONN REC CONT



TE Part # 1-1123722-3
3.96 EP PLUG HSG 3P(NATURAL)



TE Part # 7-1565033-2
04P EP HDR HSG V0 GWT NO 0203P



TE Part # 4-1123722-3
3.96 EP PLUG HSG 3P(RED)



TE Part # 1744494-4
04P EP-II HOUSING, YELLOW



TE Part # 1-1123722-4
3.96 EP PLUG HSG 4P(NATURAL)



TE Part # 3-1123722-3
3.96 EP PLUG HSG 3P(BLUE)



TE Part # 6-1123722-3
3.96 EP PLUG HSG 3P(GREEN)



TE Part # 1123721-1
EP CONN. REC CONTACT




TE Part # 5-1123722-3
3.96 EP PLUG HSG 3P(BLACK)

Also in the Series | Economy Power




Connector Contacts(15)

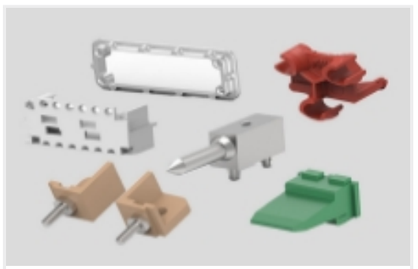

Connector Hardware(2)



Insertion & Extraction Tools(1)

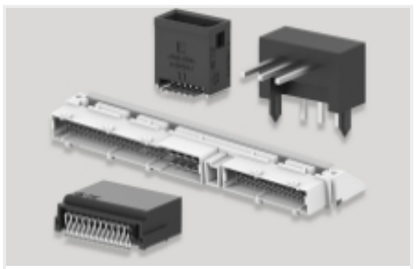


PCB Headers & Receptacles(483)



Power Contacts(9)




Rectangular Power Connectors(581)

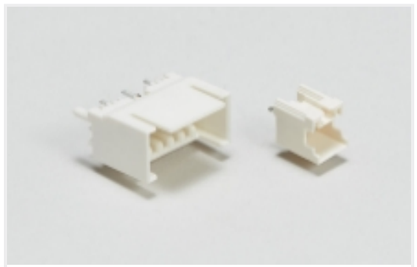

Wire-to-Board Headers & Receptacles (483)


Customers Also Bought

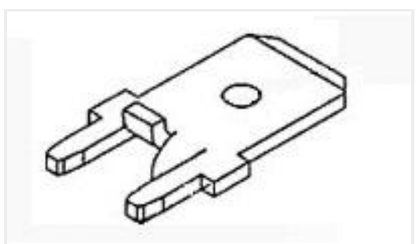


TE Part #63849-1
250 FASTON TAB TPBR




TE Part #3-644992-6
06P MTA156 HDR ASSY W/O#5 LF

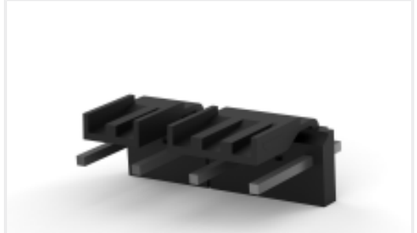


TE Part #3-647178-7
07P MTA156 HDRASSY WO#2,4,6 LF

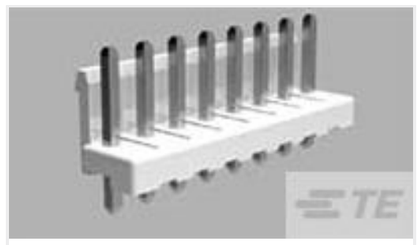


TE Part #1-1123723-7
3.96 EP HDR ASSY 7P(NATURAL)

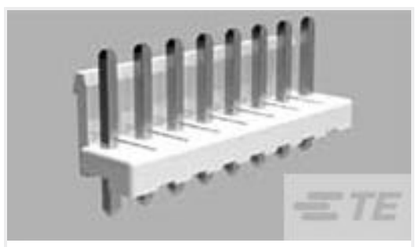


TE Part #4-1123723-5
3.96 EP HDR ASSY 5P(RED)

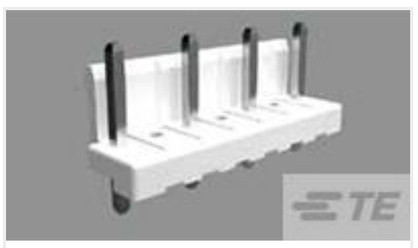


TE Part #1-1123724-2
3.96EP HDR ASSY 2(3)P NATURAL

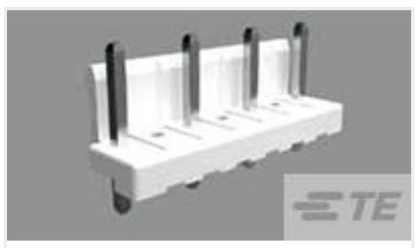

TE Part #1-1123724-3
3.96EP HDR ASSY 3(5)P NATURAL

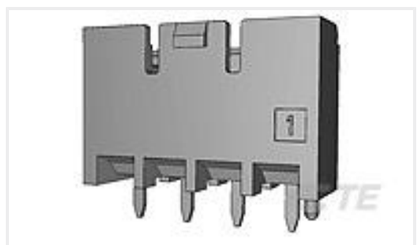

TE Part #1376382-1
5mm B-T-W Conn. 2P HDR ASSEMBL

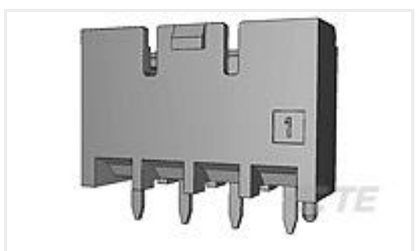

TE Part #1-1376384-2
5mm B-T-W Conn. 4P HDR ASSEMBL



TE Part #1-1969582-0
ASSY, HDR, VERT, NO-BOSS, DUAL ROW,EP2.5

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1473059-3_AD.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1473059-3_AD.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1473059-3_AD.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Application Specification

Japanese

Application Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

Economy Power (EP) Connector

Japanese

Agency Approvals

UL Report

English