


© 2021 TE Connectivity, All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	17APR2023	MV	DS

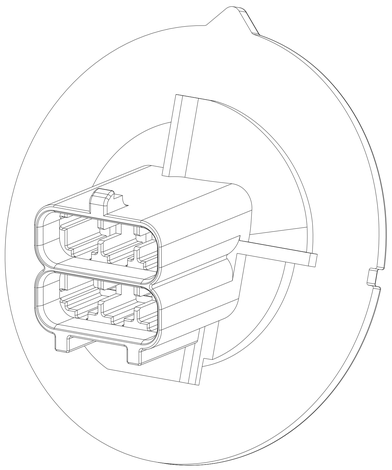

SCALE 4:1

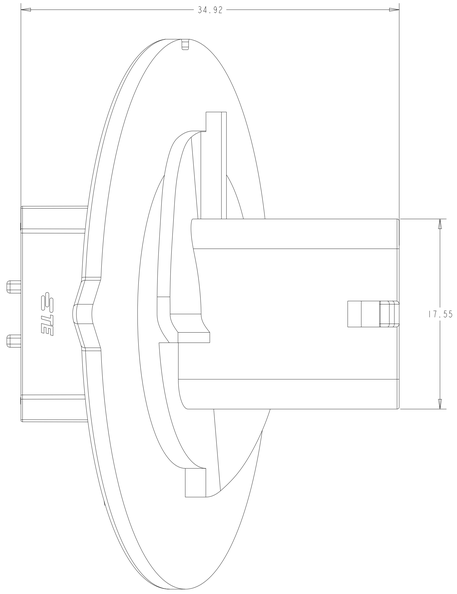

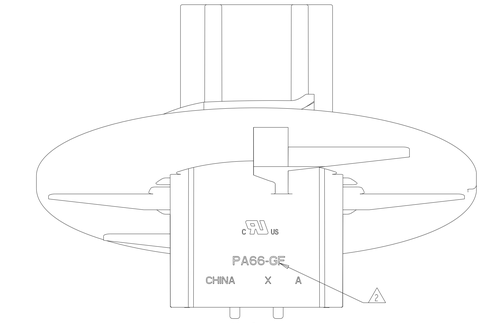



SCALE 4:1


ITEM	MATING CONNECTOR PART NUMBERS	
1	PLUG HOUSING	X-2381595-6
2	TERMINAL POSITION ASSURANCE (TPA)	2337218-6
3	FAMILY/GANG SEAL	2325349-3
		2325349-7
4	BACK COVER	2340648-6




ITEM	APPLICABLE TERMINAL PN
1	2329906-1
2	2329907-1
3	2329908-1
4	2329909-1
5	2329910-1
6	2329911-1

1. MATERIAL: PA66 - GLASS FILLED
2. MATERIAL MARK: PA66-GF
3. RECOMMENDED PANEL THICKNESS: 0.76-2.29
4. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH
5. ROTATE CONNECTOR IN CLOCK WISE DIRECTION MUST NOT OVER TWIST/ROTATE
6. THIS PRODUCT HAS NOT COMPLETED QUALIFICATION TESTING

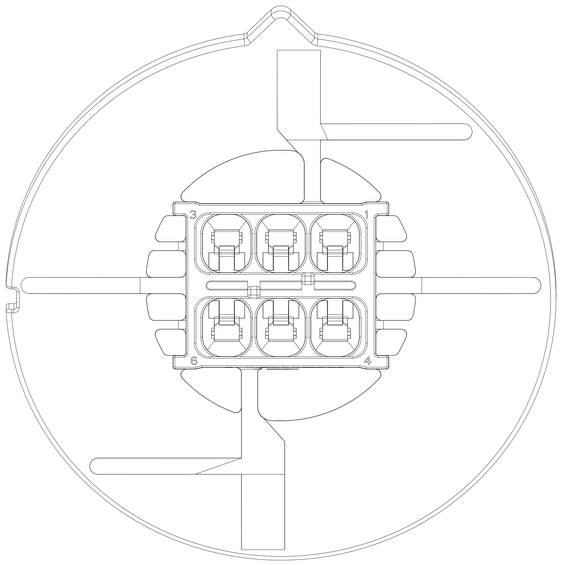

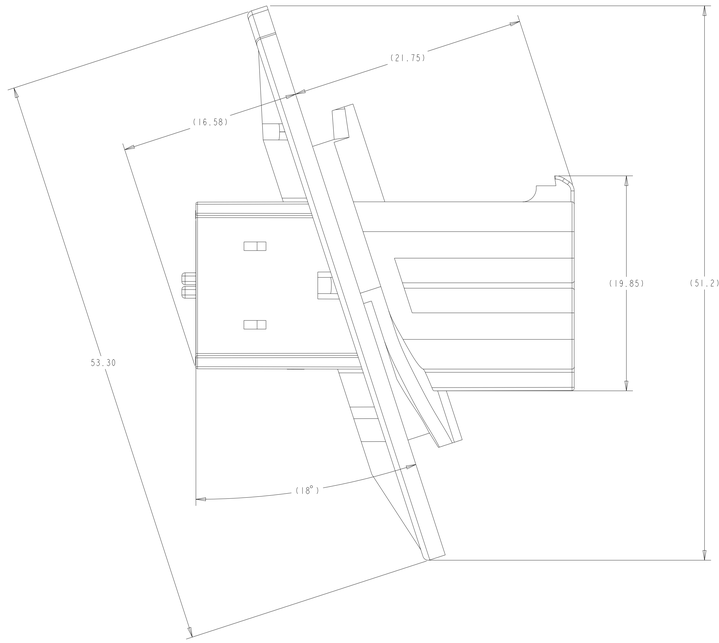

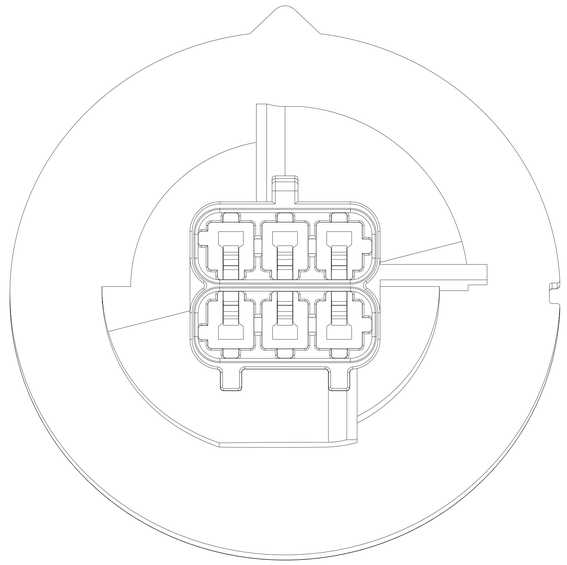

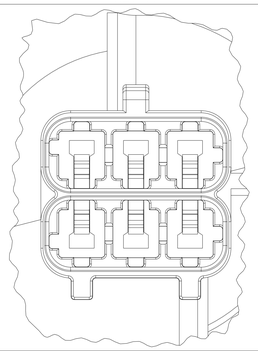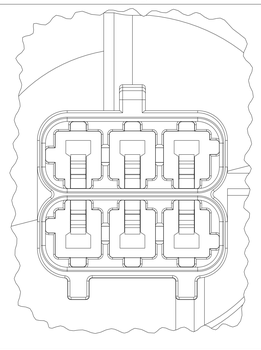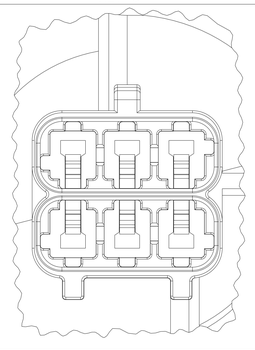KEY A	KEY B	KEY C
		
1-2381608-6 6	2-2381608-6 6	3-2381608-6 6

NATURAL	C	2 x 3	3-2381608-6
YELLOW	B	2 x 3	2-2381608-6
BLUE	A	2 x 3	1-2381608-6
COLOR	KEY	POSITION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES (UNLESS OTHERWISE SPECIFIED)

0 PLC	X=
1 PLC	X=
2 PLC	X=0.50
3 PLC	X=
4 PLC	X=
ANGLES	±

MATERIAL 1

FINISH NA

DWN B. WEAVER 04APR2021
CHK D. SWARTZ 04APR2021
APVD V. SHETTAR 04APR2021

PRODUCT SPEC 108-143081 6

APPLICATION SPEC 114-143082 6

TE Connectivity

NAME 2x3 POWER VERSA LOCK, CAP HOUSING ANGLED TWIST N LOCK

SIZE A0 | CAGE CODE 00779 | DRAWING NO C-2381608 | RESTRICTED TO


WEIGHT -

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 2 | REV A


© 2021 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-


RECOMMENDED PANEL CUT-OUT AND ANGLE (SCALE 2:1) 3 4

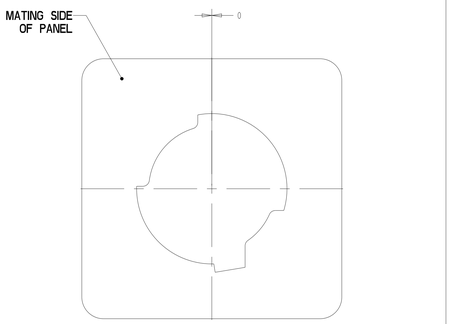


RECOMMENDED ANGLE FOR 0.76mm PANEL THICKNESS

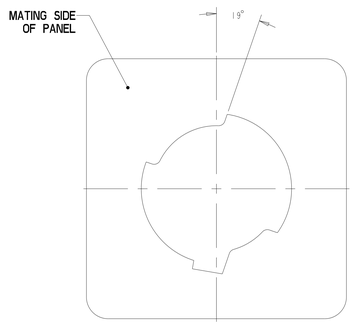


RECOMMENDED ANGLE FOR 0.86mm PANEL THICKNESS

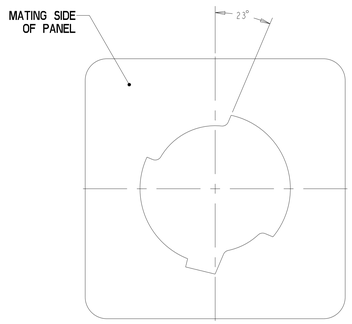


RECOMMENDED ANGLE FOR 1.02mm PANEL THICKNESS

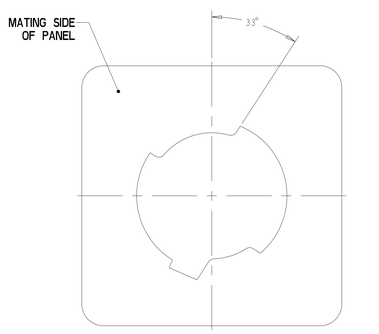


RECOMMENDED ANGLE FOR 1.27mm PANEL THICKNESS

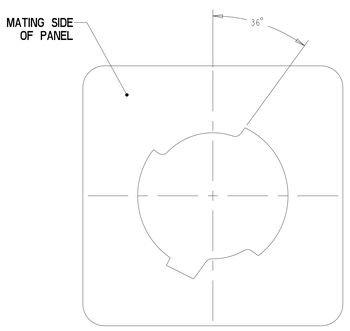


RECOMMENDED ANGLE FOR 1.47mm PANEL THICKNESS

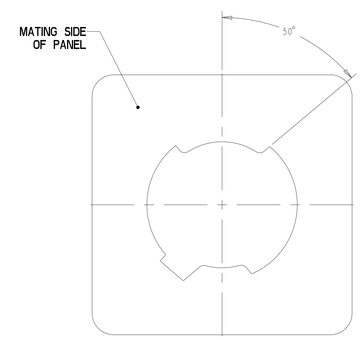


RECOMMENDED ANGLE FOR 1.85mm PANEL THICKNESS

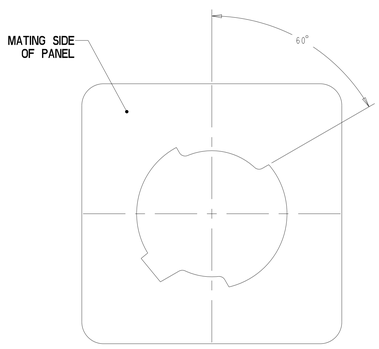

RECOMMENDED ANGLE FOR 2.03mm PANEL THICKNESS

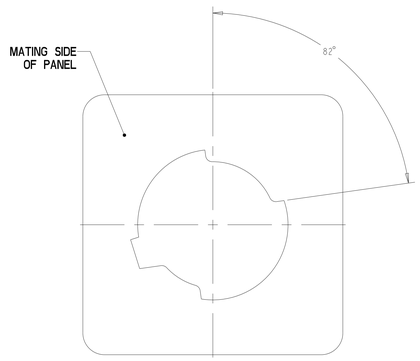


RECOMMENDED ANGLE FOR 2.29mm PANEL THICKNESS

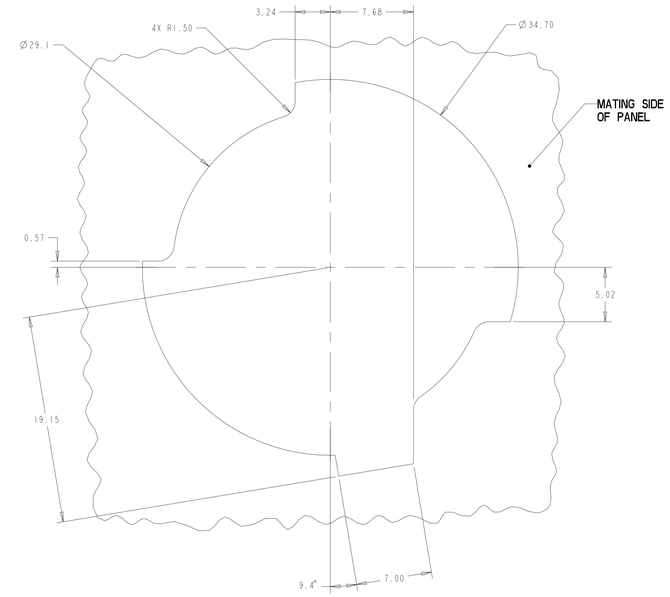

RECOMMENDED PANEL CUT-OUT 3 4

(RECOMMENDED CUTOUT DIMENSION TOLERANCES ±0.15)
0.76mm PANEL THICKNESS CUTOUT SHOWN ABOVE

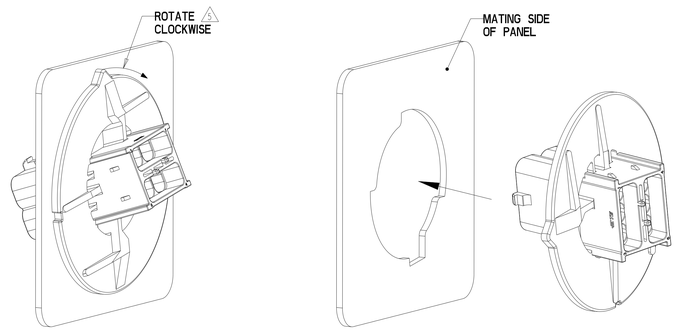

ASSEMBLY PROCEDURE 3 4

(0.76mm THICKNESS PANEL CUTOUT SHOWN ABOVE)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.50
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL

FINISH: NA

DWN	D. WEAVER	04APR2021
CHK	D. SWARTZ	04APR2021
APVD	V. SHETTAR	04APR2021

PRODUCT SPEC: 108-143081
APPLICATION SPEC: 114-143082
WEIGHT: -
CUSTOMER DRAWING

TE Connectivity

NAME: 2x3 POWER VERSA LOCK, CAP HOUSING ANGLED TWIST N LOCK

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A0	00779	C-2381608	

SCALE 5:1 | SHEET 2 OF 2 | REV A

4806 13/131