2-338313-2 ✔ ACTIVE

AMPLIMITE

TE Internal #: 2-338313-2

9 Position D-Shaped Connector, Receptacle, Cable-to-Board, Board Mount, Shell Size 1, 2.74 mm [.108 in] Centerline, Printed Circuit Board, Signal

View on TE.com >

Connectors > D-Shaped Connectors > D-Sub Receptacle Assembly: Vertical, Shell Size 1, 2.74mm



Number of Positions: **9**

Connector & Housing Type: **Receptacle**

Connector System: **Cable-to-Board**

Connector Mounting Type: **Board Mount**

Connector Shell Size: **1**

All D-Sub Receptacle Assembly: Vertical, Shell Size 1, 2.74mm (37)

Features

Product Type Features

Shell Material Configuration	Front Metal Shell
Connector & Housing Type	Receptacle
Connector System	Cable-to-Board
Connector Shell Size	1
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	9
Number of Rows	2
PCB Mount Orientation	Vertical

Body Features

Assembly Process Feature Material	Phosphor Bronze
Shell Plating Material	Tin
Primary Product Color	Black
Connector Profile	Standard

Contact Features

	30 µin
Contact Underplating Material	Nickel

Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin
Contact Shape & Form	Round
Contact Current Rating (Max)	6 A
Contact Options	Installed

Termination Features

Rectangular Termination Post & Tail Width	.45 mm[.017 in]
Rectangular Termination Post & Tail Thickness	.32 mm[.012 in]
Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	3.2 mm[.126 in]

Mechanical Attachment

Mounting Hole Diameter	5 mm
Assembly Process Feature Plating Material	Tin
Connector Mounting Type	Board Mount
PCB Mount Retention	With
PCB Mount Retention Type	Boardlock
Mating Retention	With
Mating Retention Type	Threaded Insert, M3

Housing Features

Housing Material	Polyester GF
Shell Material	Steel
Centerline (Pitch)	2.74 mm[.108 in]

Dimensions

PCB Thickness (Recommended)	1.6 mm[.063 in]
Row-to-Row Spacing	2.84 mm[.112 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]

Operation/Application

Durability Rating	200 Cycles
Shielded	No
Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	DIN 41652

Packaging Features

Packaging Quantity	55
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUL 2017 (174) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles'(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts




TE Part # CAT-AM7-248H3
IDC D-Sub: Plug Assembly, Wire to Wire, Signal, 2.77 mm



TE Part # 1-747944-5
09 SHLDG ENCL PLUG,LEAD FREE



TE Part # CAT-AM7-H3
IDC D-Sub: Plug Assembly, Low Profile, Signal, 2.77 mm

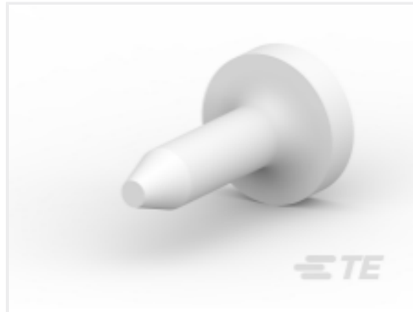

TE Part # 206509-1
SIZE 20 KEYING PLUG


Customers Also Bought




TE Part #816556-SF
RN214-2-02-4M2




TE Part #207684-3
AMPLIMITE,SKT CONT,SZ 22

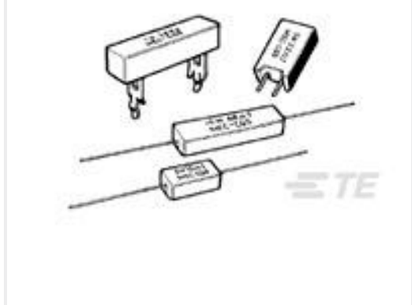

TE Part #1623804-8
SQZ10 3R3 5% WIRE

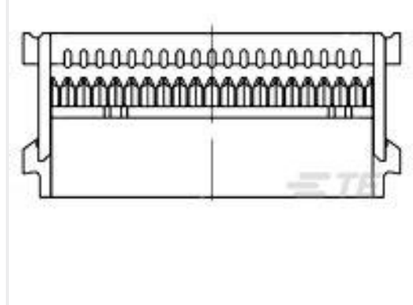

TE Part #2-1658526-9
609-1630LF=FSKT IDC S 16 30AU

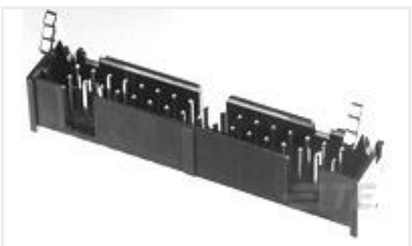


TE Part #2-1761606-6
IDC LOW PRO HDR 16P VERT LAT BLUE



TE Part #7-1879336-3
CPF 0603 1K3 1% 50PPM 1K RL



TE Part #1934225-1
Tin Man Recept Assy 4 Pair 16 Column

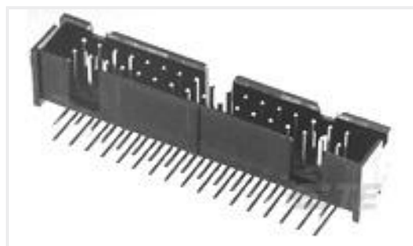

TE Part #5103311-1
A/L LOW PRO HDR 10P RA BLACK



TE Part #5226993-1
VERTICAL JACK, BNC PCB

TE Part #22987-4
SCREW,SELF TAPPING,PAN HD

Documents

Product Drawings

9P.HDP20 REC. ASSY

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-338313-2_E_c-2-338313-2-e.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-338313-2_E_c-2-338313-2-e.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-338313-2_E_c-2-338313-2-e.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Product Specification

English