2-965261-1 ✔ ACTIVE


AMP | Junior Power Timer, Timer Connector System


TE Internal #: 2-965261-1

12 V, 4 Position, Automotive Housing for Male Terminals, Wire-to-Wire, 5 mm [.196 in] Centerline, Sealable, Gray, Wire & Cable, Power, Hybrid

View on TE.com >

Automotive Parts > Automotive Connectors > Automotive Housings > Timer Connector Housing

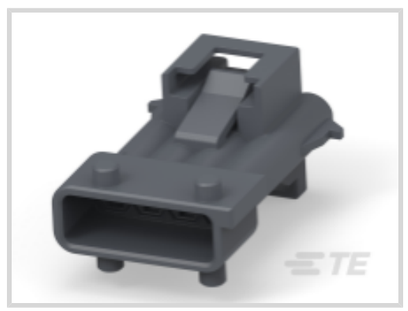

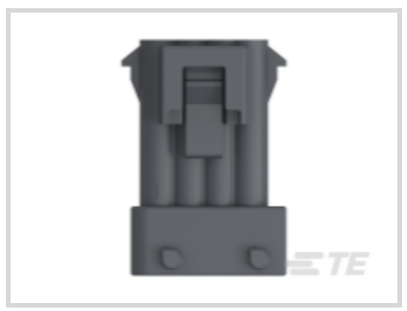



Nominal Voltage Architecture: **12 V**

Connector & Housing Type: **Housing for Male Terminals**

Number of Positions: **4**

Sealable: **Yes**

Operating Temperature Range: **-40 – 130 °C [-40 – 266 °F]**

All Timer Connector Housing (436)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Primary Locking Feature	Locking Lance
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	4
Number of Rows	1

Electrical Characteristics

Operating Voltage	14 VDC

Nominal Voltage Architecture	12 V

Body Features

Cable Exit Angle	180 °
Primary Product Color	Gray
Connector & Keying Code	B1

Contact Features

Contact Size	2.8mm
Contact Type	Tab
Mating Tab Width	2.8 mm[.11 in]
Contact Current Rating (Max)	30 A

Mechanical Attachment

Strain Relief	Without
Terminal Position Assurance	No
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF30
Centerline (Pitch)	5 mm[.196 in]

Dimensions

Product Width	39 mm[1.535 in]
Product Length	27.3 mm[1.075 in]
Connector Height	20.6 mm[.811 in]

Usage Conditions

Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]
Operating Temperature (Max)	130 °C[266 °F]

Operation/Application

Circuit Application	Power

Industry Standards

UL Flammability Rating	UL 94HB

Packaging Features

Packaging Method	Carton
Packaging Quantity	1500

Other

Serviceable	No
Connector Position Assurance Capable	No

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

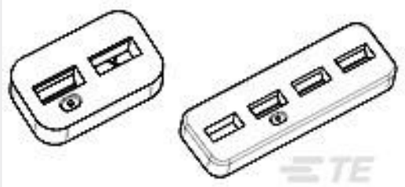


TE Part # 963208-2
SEALING FOR 4POS. JPT HSG ASSY



TE Part # 828905-1
SINGLE-WIRE-SEAL(5MM HOLE)




TE Part # 828904-1
SINGLE WIRE SEAL FOR J.P.T.CON

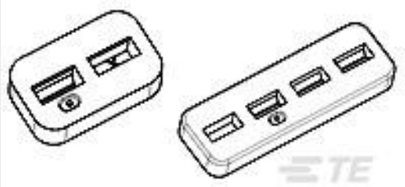

TE Part # 963208-1
DICHTUNG F4P JPT GH



TE Part # CAT-T4827-CH8172
Timer Connector Housing

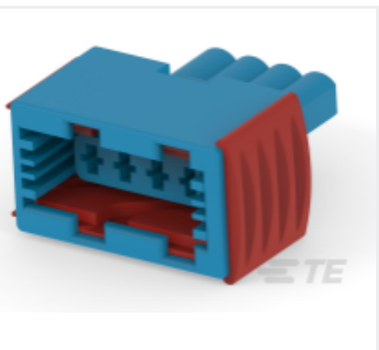

TE Part # 3-967059-1
J-P-T GEH KOMPL 4P




TE Part # 828922-1
2,5MM CAVITY PLUG FOR 5,4MM DI



TE Part # CAT-T4827-T273
TIMER, RECEPTACLE AND TAB

Also in the Series | Junior Power Timer

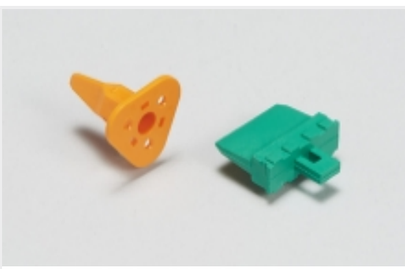

Automotive Connector Locks & Position Assurance(15)




Automotive Housings(186)




Automotive Seals & Cavity Plugs(32)



Automotive Signal & Power Connector Housings(136)

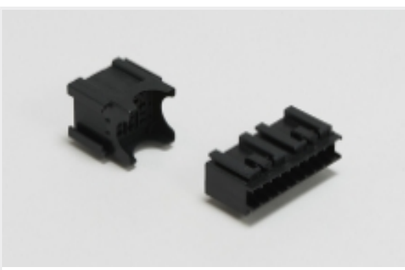


Module Components(1)

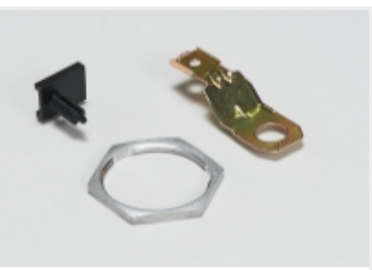

Other Automotive Connector Accessories(1)

Also in the Series | Timer Connector System

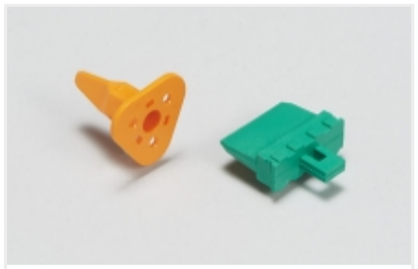

Automotive Connector Locks & Position Assurance(15)




Automotive Housings(186)



Automotive Seals & Cavity Plugs(32)



Automotive Signal & Power Connector Housings(136)

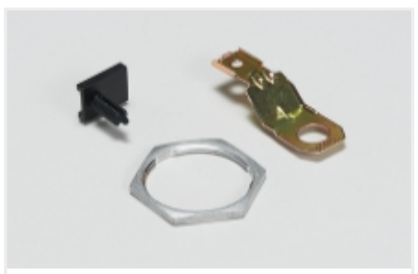


Other Automotive Connector Accessories(1)

Customers Also Bought



TE Part #ANT-GNRM-L1A-3
Antenna GNSS L1-L3 Ext Mag RG174 3M SMA



TE Part #213920-1
CPC SEAL KIT,UNASSM,SZ 17-16



TE Part #7-456404-1
CRIMPER, WIRE .070 F PREMIUM



TE Part #CAT-T4827-CH8172
Timer Connector Housing



TE Part #1703806-1
ADAPTER,SEALED,ASSY



TE Part #1-829261-4
HD FEMALE SCREWLOCK

TE Part #960783-1
CONNECTOR WITH DEAD END

Documents

Product Drawings

FLACHSTE-GEH2,8 4P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-965261-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-965261-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-965261-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

889759_3_Timer_Interconnection_System

English