te.com



MODEL 64B CRASH TEST ACCELEROMETER

Specifications

- Next Generation Crash Test Accelerometer
- Advanced Piezoresistive MEMS Sensor
- Excellent Accuracy in Crash Testing
- Compliant to SAE J211/J2570
- Compliant to ISO 6487
- ±50g to ±6000g Dynamic Range
- Mechanical Over Range Stops

Features

- Standard <3% Transverse Sensitivity
- Wide bandwidth to >8kHz
- Standard <20mV ZMO
- Linearity <1%
- 10,000g Shock Protection
- 2-10Vdc Excitation
- IP66 Environmentally Sealed
- Optimum Gas Damping
- <10sec Warm-Up Time

Applications

- Anthropomorphic Dummy Instrumentation
- Crush Zone Testing
- Pedestrian Impact Testing
- Auto Safety Testing Applications
- Shock and Impact Testing
- Transient Drop Testing

The TE Connectivity model 64B is an exceptional piezoresistive MEMS accelerometer designed for both crush zone and anthropomorphic dummy instrumentation. The accelerometer features a full bridge output configuration with ideal gas damping tailored for outstanding shock survivability and a flat frequency response to >8kHz. The model 64B accelerometer has a standard cross-talk accuracy of <3% (with option for <1%), a standard ZMO of <±25mV and a linearity accuracy specification of <±1.0%.

The model 64B crash test accelerometer is offered in ranges from ±50 to ±6000g and has a standard operating temperature range of -40°C to +121°C. The sensor is fully encapsulated in Stycast for IP66 environmental protection rating. The nominal 4000Ω bridge impedance limits current draw resulting in quick warm-up time and minimal drift, unlike lower impedance designs on the market which are subject to much longer warm-up time due to gage heating effects.

TE Connectivity also supplies the calibration data in a user friendly excel format which enables high volume users to quickly upload the calibration information for each sensor installed.

Performance Specifications

All values are typical at +24°C, 80Hz and 10Vdc excitation unless otherwise stated. TE Connectivity reserves the right to update and change these specifications without notice.

PARAMETERS

DYNAMIC							NOTES
Range (g)	±50	±100	±200	±500	±2000	±6000	
Sensitivity (mV/g)[1]	1.2-3.0	0.6-1.2	0.6-1.2	0.3-0.6	0.12-0.3	0.05-0.12	@10Vdc Excitation
Frequency Response (Hz)	0-1000 0-1400	0-1200 0-1600	0-1400 0-1900	0-2000 0-2800	0-6000 0-8000	0-6000 0-8000	±5% ±1dB
Natural Frequency (Hz)	4000	6000	8000	15000	26000	28000	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<1% on 'T' Option
Non-Linearity (%FSO)	±1	±1	±1	±1	±1	±1	
Damping Ratio	0.5	0.5	0.5	0.3	0.15	0.10	
Shock Limit (g)	10000	10000	10000	10000	10000	10000	

ELECTRICAL		
Zero Acceleration Output (mV)	<±25	Differential
Excitation Voltage (Vdc)	2 to 10	
Input Resistance (Ω)	3500-4500	
Output Resistance (Ω)	3500-4500	
Insulation Resistance (MΩ)	>100	@100Vdc
Residual Noise (µV RMS)	<10	
Ground Isolation	Isolated from mounting surface	
Warm-up Time	<10 seconds	@10Vdc Excitation


ENVIRONMENTAL		
Thermal Zero Shift (%FSO/°C)	±0.04	From 0 to +50°C
Thermal Sensitivity Shift (%/°C)	-0.20 ±0.05	From 0 to +50°C
Operating Temperature (°C)	-40 to +121	
Humidity	Epoxy Sealed, IP66	

PHYSICAL		
Case Material	Anodized Aluminum, Black	
Cable	4x #32 AWG Leads, PFA Insulated, Braided Shield, TPE Jacket	
Weight (grams)	1.0	Cable not included
Mounting	2x #0-80 x 1/4" Socket Head Cap Screws	


[1] Output is ratiometric to excitation voltage

Calibration supplied:	CS-FREQ-0100	NIST Traceable Amplitude Calibration from 20Hz to ±1dB Frequency Limit
Optional accessories:	MTG-E4	Triaxial Mounting Block
	121	3-Channel Precision Low Noise DC Amplifier
	140A	Auto-Zero Inline Amplifier


Typical Frequency Response

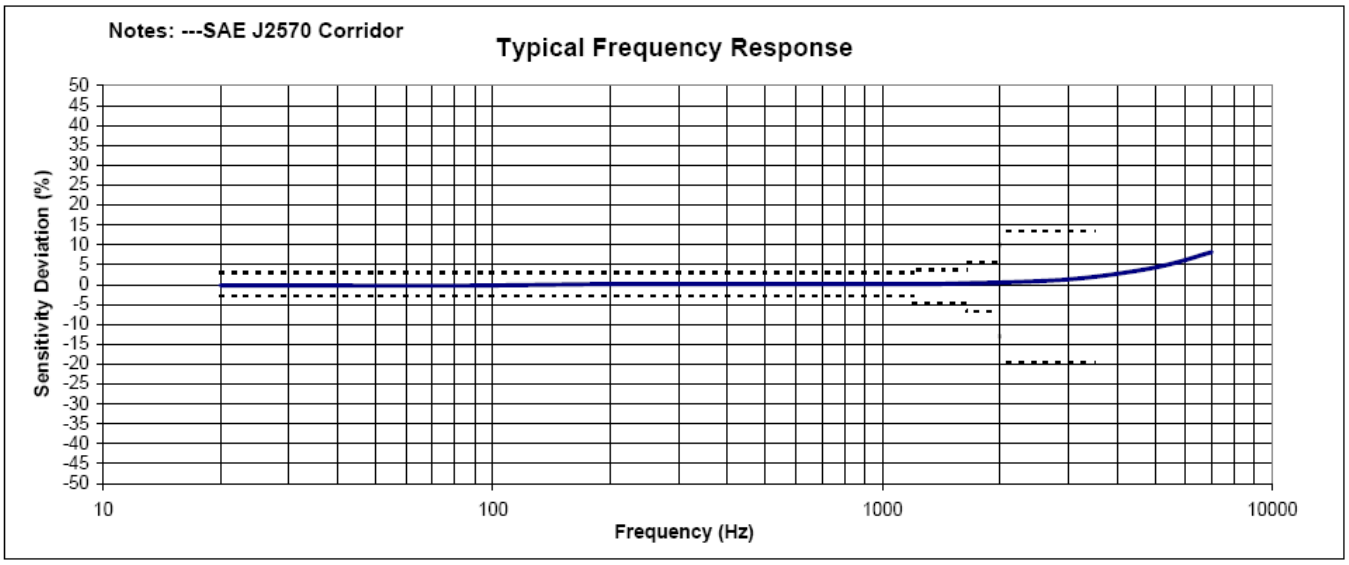


Schematic

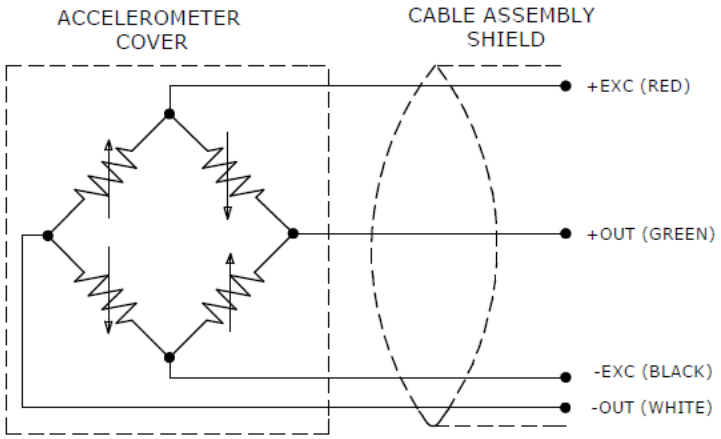

Dimensions

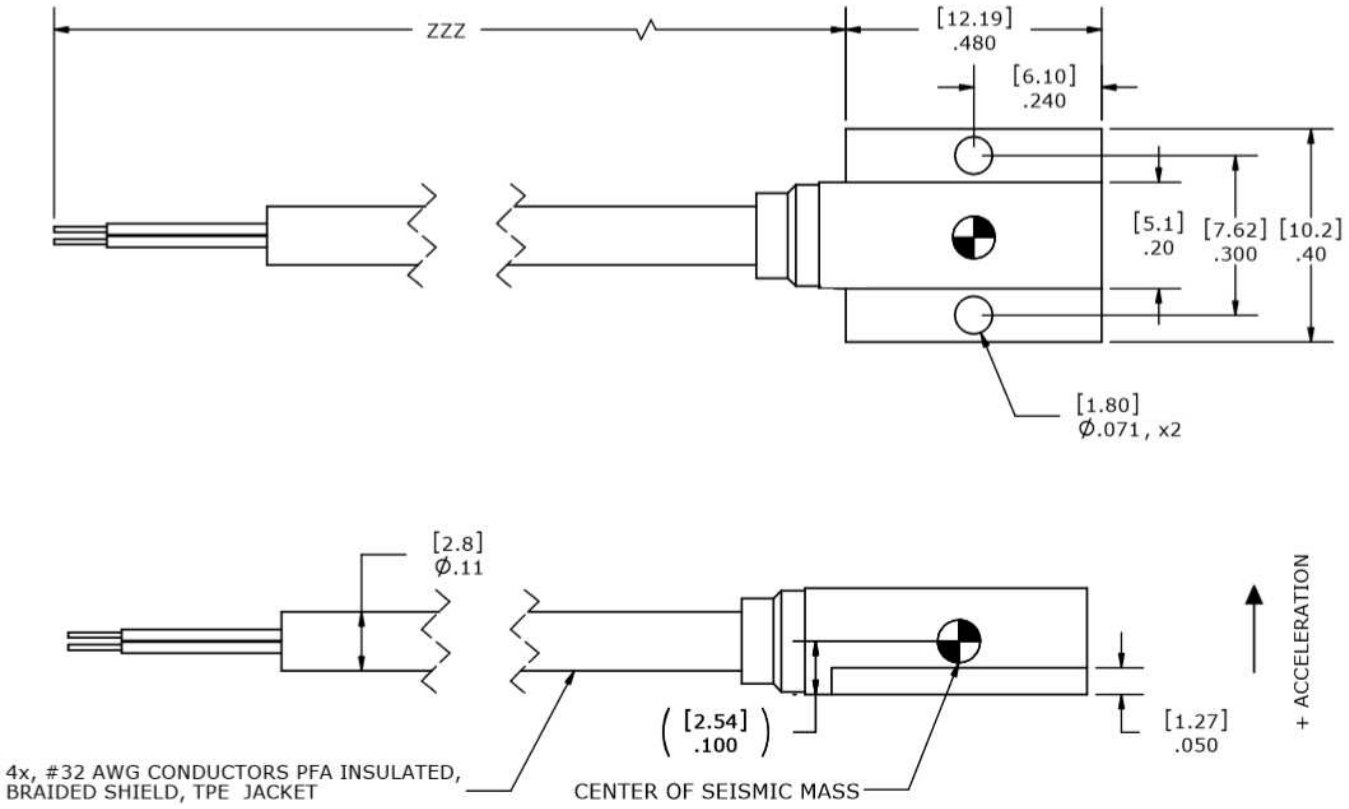

Triaxial Mounting Block

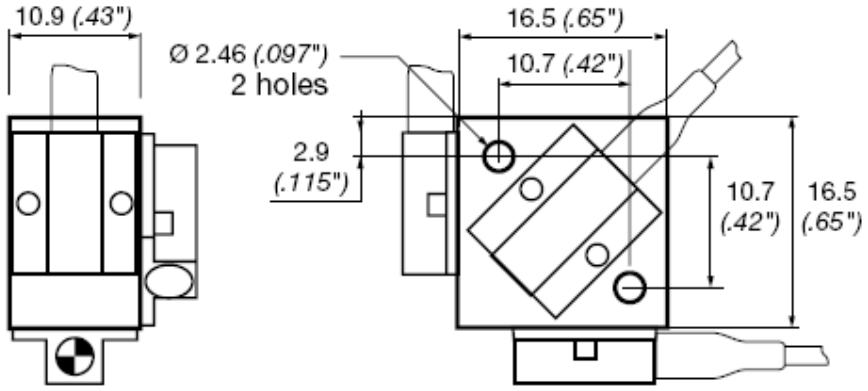

Ordering Information

64B	GGGG	ZZZ	T	XXX

Range
0050 = 50g
0100 = 100g
0200 = 200g
0500 = 500g
2000 = 2000g
6000 = 6000g

Cable length
240 = 240 inches
360 = 360 inches

197 = 197 inches, 5 meters
276 = 276 inches, 7 meters

Transverse Sensitivity Option
Blank = <3%
T = <1%

Excitation Voltage Option
Blank = 10Vdc
001 = 5Vdc
005 = 2Vdc

Example; 64B-2000-360
Model 64B, 2000g range, 360inch (30ft) cable length

Example; 64B-0500-276T-001
Model 64B, 500g range, 276inch (7m) cable length, <1% transverse sensitivity option, 5V calibration

NORTH AMERICA
Measurement Specialties, Inc.,
a TE Connectivity Company
Tel: 800-522-6752
customercare.hmpt@te.com

EUROPE
MEAS France SAS
a TE Connectivity Company
Tel: +31 73 624 6999
customercare.lcsb@te.com

ASIA
Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Tel: 0400-820-6015
customercare.shzn@te.com

te.com

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Corporation. All Rights Reserved.

Version # 10/2020