




Part Number : [2005062005](#)

Product Description : stAK50h 2 Bay Right-Angle Hybrid Header, 39 Circuits, Bay 1: 12 Circuits/Key 1/ Black; Bay 2: 27 Circuits/Key 1/Black; Tube

Series Number : 200506

Status : Active

Product Category : PCB Headers and Receptacles

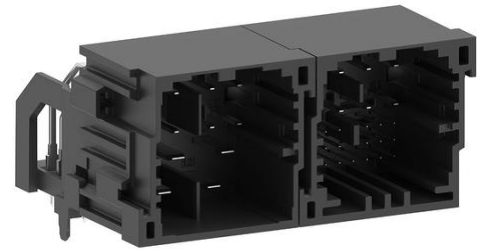

Documents & Resources

Drawings

[2005062005_sd.pdf](#)

3D Models and Design Files

[STEP AP242](#)

[SOLIDWORKS](#)

[Creo](#)

[Symbol and Footprint \(Multi-Format\)](#)

Specifications

[2005060000-AS-000.pdf](#)

[2005060000-AS-CH-000.pdf](#)

[1600140001-000.pdf](#)

[2005060001-PS-000.pdf](#)

[2005060001-PS-CH-000.pdf](#)

[2005000120-TS-000.pdf](#)

[2005000280-TS-000.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44; 34; 33
China RoHS	Not Relevant
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Low-Halogen per IEC 61249-2-21

REACH SVHC	Not Contained per D(2025)4165-DC (25 June 2025)
EU RoHS	Compliant per EU 2015/863

Compliance Statements

- EU RoHS
- REACH SVHC
- Low-Halogen

Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest

- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

Part Details

General

Status	Active
Category	PCB Headers and Receptacles
Series	200506
Description	stAK50h 2 Bay Right-Angle Hybrid Header, 39 Circuits, Bay 1: 12 Circuits/Key 1/Black; Bay 2: 27 Circuits/Key 1/Black; Tube
Application	Automotive, Power, Signal, Wire-to-Board
Component Type	PCB Header
Product Name	stAK50h
UPC	191128755634

Electrical

Current - Maximum per Contact	5.0A, 12.0A, 30.0A
Voltage - Maximum	14V DC

Physical

Breakaway	No
Circuits (Loaded)	39
Circuits (maximum)	39
Color - Resin	Black
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	SPS
Net Weight	21.215/g
Number of Rows	4, 5
Orientation	Right Angle
Packaging Type	Tube
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Pitch - Mating Interface	2.00mm, 4.00mm, 7.20mm
Pitch - Termination Interface	2.00mm, 4.00mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Yes
Stackable	Yes
Temperature Range - Operating	-40° to +105°C LV-214, -40° to +85°C GMW3191 June2012
Termination Interface Style	Through Hole

Mates With / Use With

Mates with Part(s)

Description	Part Number
stAK50h Hybrid Receptacle, 12 Circuits, Key 1, Black, Bag	<u>1600260001</u>
stAK50h Hybrid Receptacle, 27 Circuits, Key 1, Black, Bag	<u>1600290011</u>