



SD

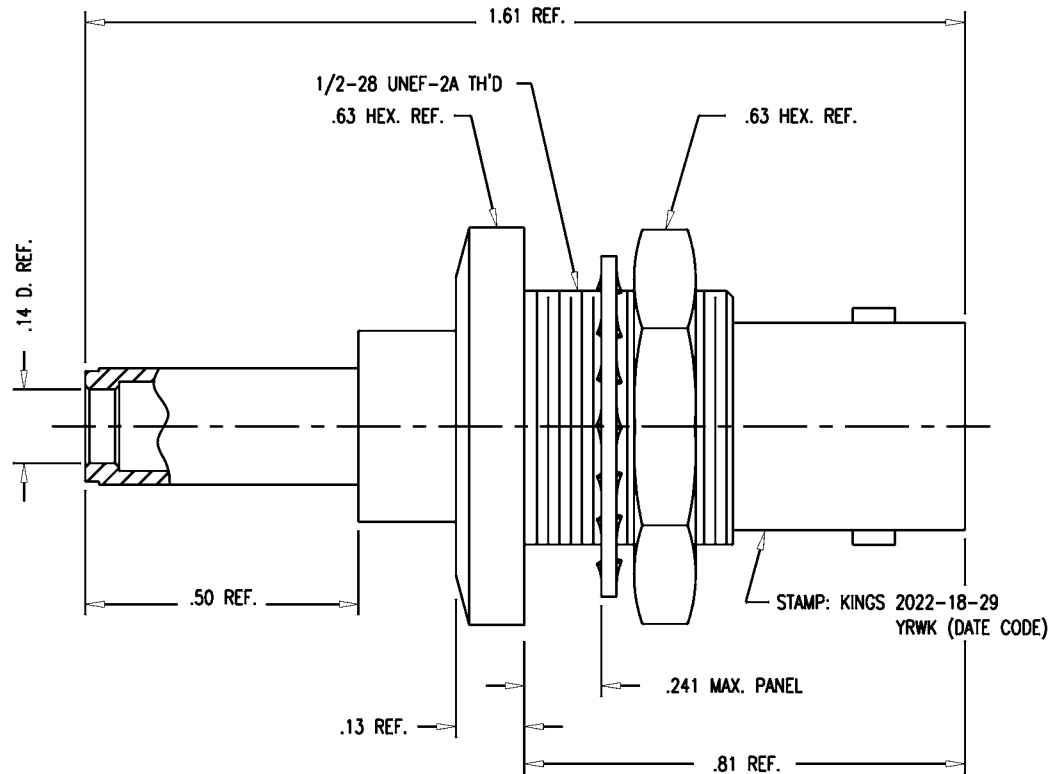

NOTES:

1. FOR USE WITH TYPE 735 CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-682 (BULK PACKAGING) OR 3-680 (BAG PACKAGING).
3. FOR CRIMPING USE DIE KTH-2185.
4. INTERFACE PER MIL-STD-348, 301-2 (AS APPLICABLE).
5. CENTER CONTACT AND SLEEVE SUPPLIED UNASSEMBLED.
6. MARK PACKAGE: KINGS 2022-18-29 YRWK (DATE CODE)

7. MATERIALS:
INSULATORS-TEFLON
K-GRIP SLEEVE-COM. BRONZE
CENTER CONTACT FEMALE-BER. COP.
LOCKWASHER: PHOSPHOR BRONZE
ALL OTHER METAL PARTS-BRASS
8. FINISHES:
CENTER CONTACTS-HARD GOLD PLATE
ALL OTHER METAL PARTS-NICKEL PLATE
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE-75 OHMS
WORKING VOLTAGE-500 VRMS
FREQUENCY RANGE-DC TO 4 GHz



MOUNTING HOLE

SD

2022-18-29

REVISIONS		
ISSUE	CHANGES	
2	ER 32590 KH 10/26/90	
3	CN 32875 C WJM 03/07/91	
4	CN 33077 A KH 05/21/91	
5	CN 33783 A KH 03/31/92	
6	CN 34941 D JCA 11/01/93	
7	CN 35000 B JCA 11/01/93	
8	CN 36727 A KH 12/21/95	
9	CN 37219 E KH 02/13/97	
10	CN 37667 E HVN 09/29/98	
11	CN 38069 C HVN 09/06/00	
2022-18-29SD		
SCALE 4:1		
APPROX SURFACE AREA		
WAS: E-16425		
USED ON		
REF:		
JK, BKHD, 75 BNC		
DRAWN	KH	DATE 10/26/90
DESIGN	JT	DATE 12/07/90
APPR.	VLS	DATE 12/10/90
KINGS ELECTRONICS CO., INC. ROCK HILL, SOUTH CAROLINA 29730		
2022-18-29		