



Connectors > RF Connectors > Coax Connectors



RF Interface: **SMA**
RF Connector Style: **Jack**
RF Connector Mated Outer Diameter (Approximate): **6.35 mm [.25 in]**
Impedance: **50 Ω**
RF Connector Coupling Mechanism: **Threaded**

Features

Product Type Features

Connector Product Type	Connector Assembly
RF Interface	SMA
RF Connector Style	Jack
Connector System	Cable-to-Panel
Sealable	No

Configuration Features

Number of Positions	1
Number of Coaxial Contacts	1

Electrical Characteristics

Impedance	50 Ω
-----------	------

Body Features

Body Material	Stainless Steel
Body Material Finish	Passivated
Body Plating Material	Gold



Contact Features

RF Connector Contact Configuration	Captivated
RF Connector Center Contact Underplating Material	Copper
RF Connector Center Contact Plating Material	Gold (Au)
RF Connector Center Contact Material	Beryllium Copper

Termination Features

Termination Method to Wire & Cable	Solder
------------------------------------	--------

Mechanical Attachment

Panel Mount Feature Type	Flange
Panel Attachment Style	Rear Mount
RF Connector Coupling Mechanism	Threaded
Connector Mounting Type	Panel Mount
RF Contact Captivation Method	Epoxy
Detent	Without

Housing Features

Body Orientation	Straight
------------------	----------

Dimensions

Product Length	27.41 mm[1.079 in]
RF Connector Mated Outer Diameter (Approximate)	6.35 mm[.25 in]

Usage Conditions

Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Operating Frequency Range	18 GHz
---------------------------	--------

Packaging Features

Packaging Method	Bag
------------------	-----

Other

Number of Panel Mounting Holes	2
Dielectric Material	Polytetrafluoroethylene (PTFE)

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>



EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (4.35% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Pin-in-Paste capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 1052066-1
2037 5006 00,SMA RA CABLE PLUG



TE Part # 1050547-1
2001 5032 00

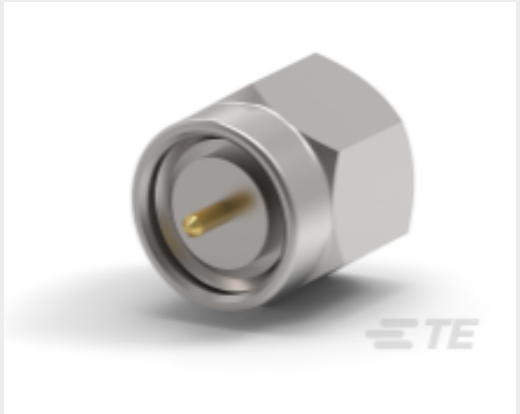

TE Part # 1050602-1
2001 5395 02



TE Part # 1-1478908-0
SMA STR PLG S/CLMP RG174 GSS



TE Part # 1056462-1
[2837 7388 02](#)



TE Part # 1056456-1
[2837 7316 02](#)



TE Part # 1050859-1
[2002 5016 00](#)



TE Part # 1051110-1
[2007 5054 02](#)



TE Part # 1052098-1
[2037 5100 02](#)



TE Part # 1050524-1
[2001 5003 00,SMA CABLE PLUG](#)



TE Part # 1-1478912-0
[SMA R/A PLG S/CLMP RG174 GSS](#)




TE Part # 1050525-1
[2001 5003 02,SMA CABLE PLUG](#)



TE Part # 1053265-1
[2058 5329 02](#)



TE Part # 1-1337433-0
[BNC RM BHJ Hex 50Ohm Nickel Pltd RG58C/U](#)

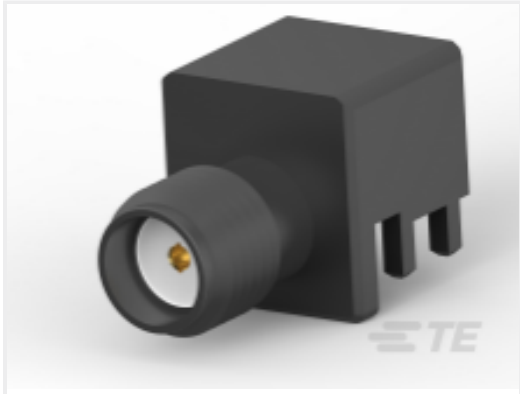

TE Part # 2081005-1
[ASSY. SMA JACK PCB EDGE MOUNT](#)



TE Part # 1053265-2
[2058 5329 02](#)



TE Part # 1-1478907-0
[SMA STR PLG S/CLMP RG58 GSS](#)



TE Part # 1050548-1
[2001 5032 02](#)




TE Part # 1051664-1
[2031 5012 00](#)



TE Part # 1-1337431-0
[BNC Str Plg Hex 75Ohm Nickel Pltd RG179B](#)

Also in the Series | SMA

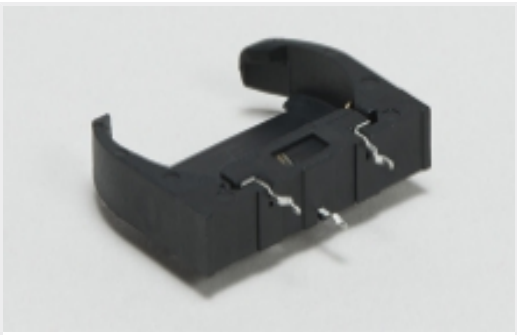


Battery Holders(1)



Connector Adapters & Connector Savers(8)




Connector Caps & Covers(3)

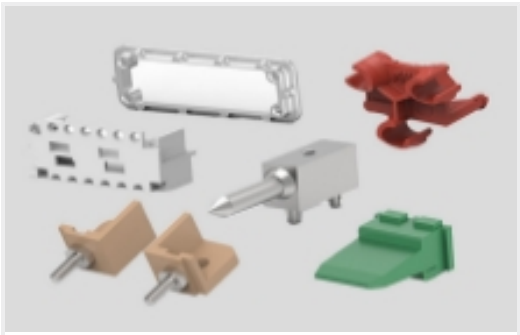

Connector Hardware(2)



[Connector Strain Relief\(1\)](#)

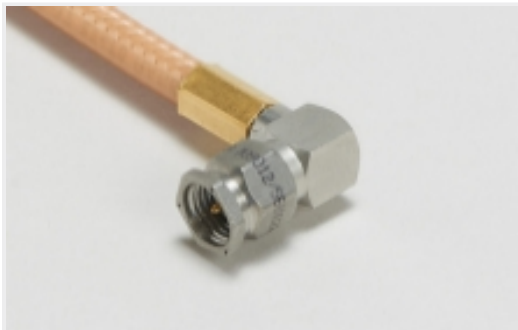

[RF Cable Assemblies\(121\)](#)



[RF Terminators\(1\)](#)

Customers Also Bought



TE Part #2-35149-1
[TERMINAL,PIDG R 12-10 6](#)



TE Part #5-146278-2
[02 MODII HDR SRST B/A .100CL](#)



TE Part #5-146281-5
[05 MODII HDR SRST B/A LF](#)




TE Part #5-146281-6
[06 MODII HDR SRST B/A .100CL](#)



TE Part #2-331677-6
[SOCKET,MIN-SPR W/H AU SER-3](#)



TE Part #1053354-1
[2062 0000 00,SMA PCB VERT JACK](#)

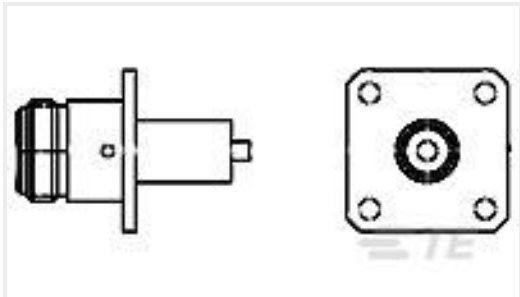

TE Part #1057290-1
[3052 1201 10,N SERIES FM PLUG](#)



TE Part #1057780-1
[3152 1201 10,TNC FLANGE JACK](#)



TE Part #2057417-1
[IMP100S,R,RA4P8C,UG,39](#)



TE Part #5227699-3
[BNC PCB VERTICAL](#)

Documents

Product Drawings

[2052 1352 02,SMA FM JACK RECPT](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_1052552-1_A.2d_dxf.zip](#)

English

[3D PDF](#)

1052552-1

SMA Connector, Jack, 50 ohm, Threaded, 18 GHz, Cable-to-Panel, 1 Position, Panel Mount, -65 – 125 °C [-85 – 257 °F], Solder, Straight, SMA



3D

Customer View Model

[ENG_CVM_CVM_1052552-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1052552-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SMA Connectors](#)

English