

Series 2100 MIL-Spec and Hermetically Sealed

Specifications





Dielectric — In accordance with specification MIL-R-6106E (ASG). Also withstands 1,000 Volts RMS at 60 Hz between non-connected terminals.


Other — AGASTAT Miniature Timing Relays also conform to applicable MIL-Spec. requirements covering: Moisture, Ozone, Humidity, Sunshine, Sand/Dust, Acoustic Noise, Salt Spray, and Prolonged Storage.




AGASTAT timing relays perform to military specifications in patriot missiles.

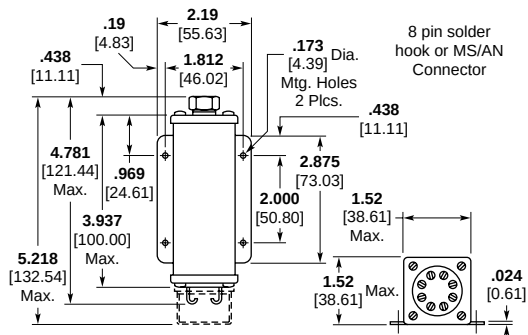


Panel Mount —H1, —H3

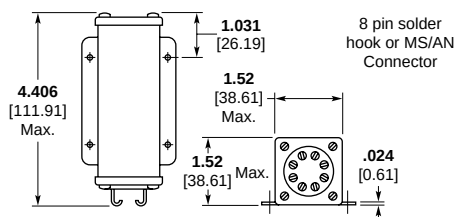

Panel Mount —9

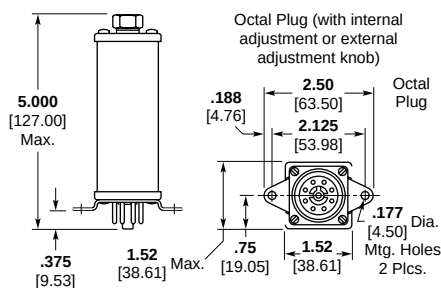

Chassis Mount —H2

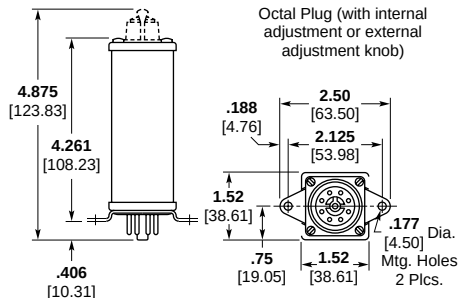

Chassis Mount —4, —5

Ordering Information — MIL-Spec & Hermetically Sealed

Model Series	Operation	Contact Arrangement	Operating Current	Physical Characteristics	Timing Range	Coil Voltage
2100 Timing Relay	1 — On-Delay 2 — Off-Delay	2 — Double Pole Double Throw	A — AC D — DC	Enclosure MIL-Spec. H1 Hermet. Seal H2 Hermet. Seal H3 Hermet. Seal 4 — Unsealed 5 — Unsealed 9 — Unsealed	Timing Range A — .03 to .1 sec. B — .1 to .3 sec. C — .15 to 1.0 sec. D — .375 to 3.0 sec. E — .750 to 10.0 sec. F — 1.0 to 30.0 sec. G — 2.0 to 60.0 sec. H — 5.0 to 120.0 sec. J — 5.0 to 180.0 sec. K — 1.5 to 30.0 cyc. L — 3.0 to 120.0 cyc.	Coil Voltage M — 12 VDC N — 28 VDC P — 48 VDC R — 110 VDC S — 120 VAC 60 Hz T — 240 VAC 60 Hz U — 115 VAC 400 Hz Y — 125 VDC
				Adjustment Ext. Screw Ext. Screw Ext. Screw Ext. Knob Internal Key Internal Key		
				Connector Solder Hook Octal Plug "AN" Conn. Octal Plug Octal Plug Solder Hook		
				Mounting Panel Mount Chassis Mount Panel Mount Chassis Mount Chassis Mount Solder Hook		