



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Type: **PCB Mount Plug**

Connector System: **Board-to-Board**

Number of Positions: **5**

Number of Rows: **1**

Centerline (Pitch): **2 mm [.079 in]**

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Type	PCB Mount Plug
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Columns	5
Number of Loaded Positions	5
Connector Contact Load Condition	Fully Loaded
Number of Positions	5
Number of Rows	1



PCB Mount Orientation	Vertical
Board-to-Board Configuration	Orthogonal, Parallel
Number of Power Positions	5

Electrical Characteristics

Insulation Resistance	10000 MΩ
-----------------------	----------

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

PCB Contact Termination Area Plating Material Thickness	4 – 6 μm[157.48 – 236.22 μin]
Contact Layout	Inline
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Tab
Contact Current Rating (Max)	18 A
PCB Contact Termination Area Plating Material	Tin

Termination Features

Termination Method to PCB	Surface Mount
---------------------------	---------------

Mechanical Attachment

Panel Mount Feature	Without
Mating Retention	Without
PCB Mount Alignment Type	Locating Posts
Mating Alignment Type	Polarization
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	Without

Housing Features

Mating Entry Location	Top
Centerline (Pitch)	2 mm[.079 in]
Housing Material	Liquid Crystal Polymer (LCP)

Dimensions

Connector Width	5.85 mm[.23 in]
-----------------	-----------------



Connector Height	14.3 mm[.563 in]
Connector Length	12.15 mm[.478 in]
Stack Height	9 mm[.354 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	220
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: FEB 2026 (253) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

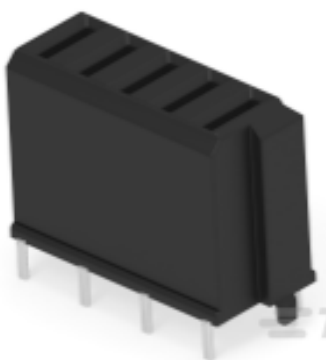
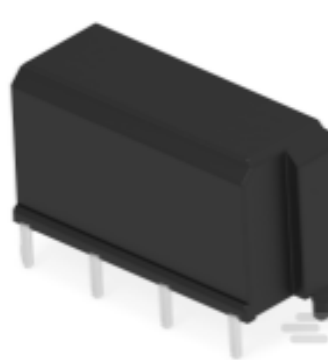
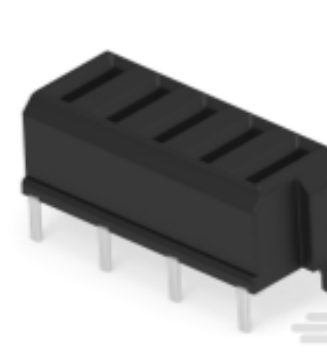
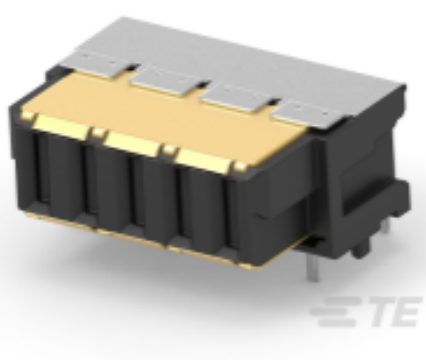
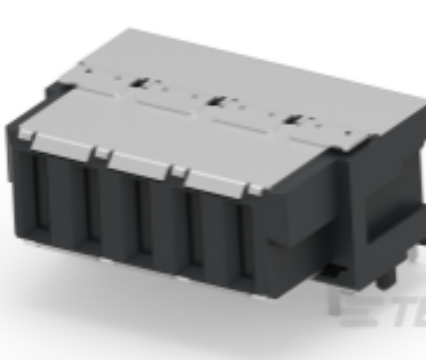
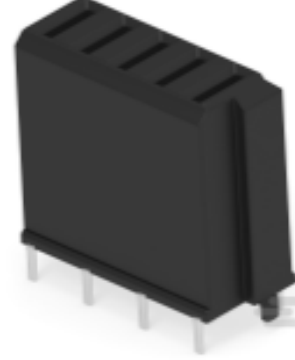
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products





will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 214914-E MSPPM 5 F SMDTHR F8 * A V 137 094 * E008	 TE Part # 214547-E MSPPM 5 F SMD F6 * A V 137 094 * E008 J	 TE Part # 214548-E MSPPM 5 F SMD F8 * A V 137 094 * E008 J	 TE Part # 474698-E MSPPM 5 F SMDTHR F8 * A V 137 094 KP E00
 TE Part # 214549-E MSPPM 5 F SMD F10 * A V 137 094 * E008 J	 TE Part # 214913-E MSPPM 5 F SMDTHR F6 * A V 137 094 * E008	 TE Part # 214356-E MSPPM 5 F SMD F4 * A V 137 094 * E008 J	 TE Part # 214912-E MSPPM 5 F SMDTHR F4 * A V 137 094 * E008
 TE Part # 364710-E MSPPM 5 F SMDTHR * 90 A V 137 094 * E008	 TE Part # 394571-E MSPPM 5 F THR * 90 A V 137 094 * E008 J	 TE Part # 214915-E MSPPM 5 F SMDTHR F10 * A V 137 094 * E00	 TE Part # 364709-E MSPPM 5 F SMD * 90 A V 137 094 * E008 J


Also in the Series | ERNI MicroSpeed Power Modules

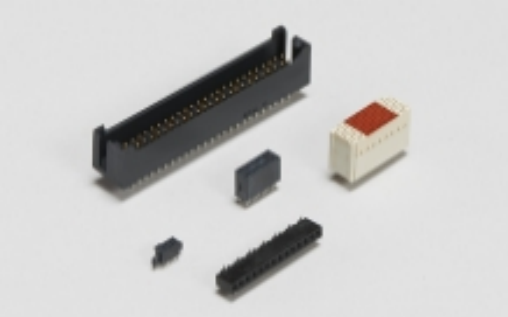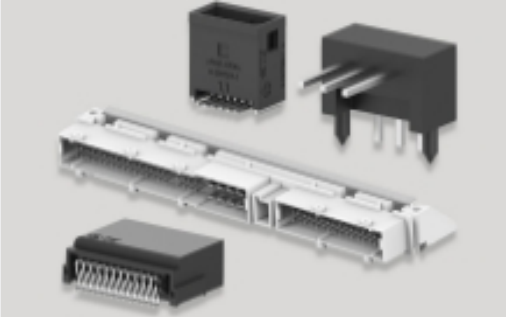 Board-to-Board Headers & Receptacles(41)	 PCB Headers & Receptacles(41)	 Rectangular Power Connectors(41)
---	---	---

Customers Also Bought



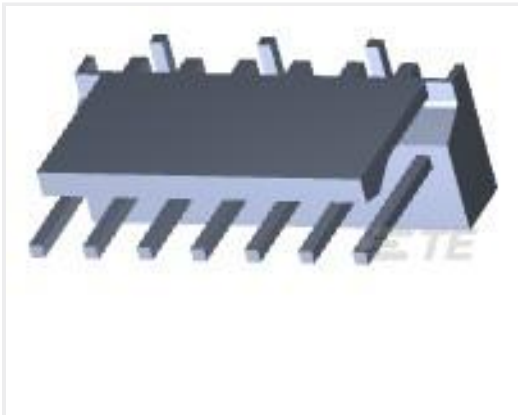TE Part #207609-6
[SKT HDR ASSY,3 POSN,METRIMATE](#)



TE Part #3-647166-7
[7P MTA100 HDR ASSY,SM,FL,LF](#)



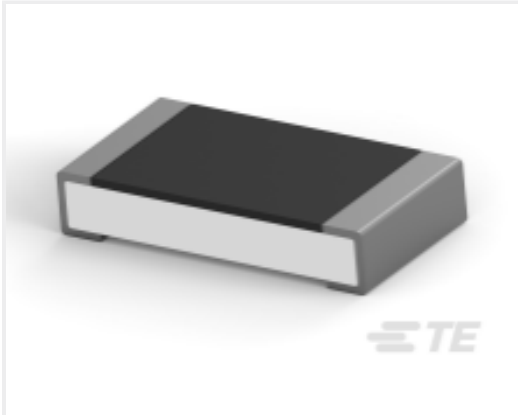
TE Part #1-770166-1
[02P MINI UMNL ASSY VO SNAU LF](#)



TE Part #6-1622825-8
[RL73K 2B R18 5% 5K RL](#)




TE Part #3-2176327-4
[CRGP 0805 5K6 1%](#)




TE Part #5-2176388-3
[RQ 1206 34R8 0.1% 10PPM 5K RL](#)



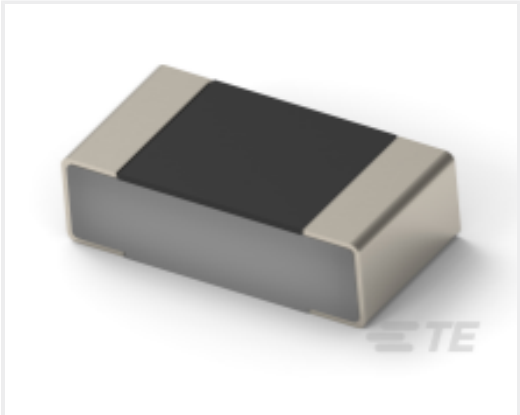TE Part #2176430-6
[MPT35 R68 5%](#)



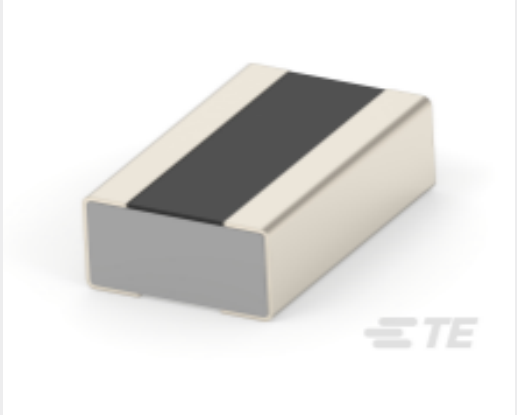TE Part #2176467-2
[TLRP 1206 1.0W R010 1% 50PPM 5K RL](#)



TE Part #2-2176535-1
[RLW73 A2 1% R47 200ppm 5k RL](#)



TE Part #5406721-2
[MJ,RJ45,SM,TGRAY,13" REEL](#)

Documents

Product Drawings

[MSPPM 5 M SMD M9 * A V 137 094 * E008 J](#)

German

CAD Files

Customer View Model

[ENG_CVM_CVM_214551-E_1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_214551-E_1.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_CVM_214551-E_1.2d_dxf.zip](#)

English

[3D PDF](#)

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



ERNI MicroSpeed Power

English

ERNI MicroSpeed Power

German