2292113-1 ✔ ACTIVE

AMP | 0.64/025 Connector System

TE Internal #: 2292113-1

Horizontal, Wire-to-Board, 40 Position, 2 Row, 3mm [.118in] Centerline, Tin (Sn), Printed Circuit Board, Signal, Black, 0.64/025 Connector System

View on TE.com >

Automotive Parts > Automotive Connectors > Automotive Headers







PCB Mount Orientation: **Horizontal**

Termination Method to PCB: **Through Hole - Screw**

Sealable: **No**

Centerline (Pitch): **3 mm [.118 in]**

Connector System: **Wire-to-Board**

Features

Product Type Features

Mixed & Hybrid Header	No
Header Type	Fully Shrouded
Connector Shape	Rectangular
Connector Product Type	Connector Assembly
Sealable	No
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Horizontal
Number of Positions	40
Number of Rows	2

Body Features

Primary Product Color	Black

Contact Features

Mating Tab Thickness	.64 mm[.025 in]
Contact Type	Tab
Mating Tab Width	.64 mm[.025 in]
Contact Mating Area Plating Material	Tin (Sn)

Termination Features

Termination Method to PCB	Through Hole - Screw

Mechanical Attachment

Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	With
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	3 mm[.118 in]

Dimensions

PCB Thickness (Recommended)	1.6 mm[.063 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Operation/Application

Circuit Application	Signal

Packaging Features

Packaging Method	Tube
Packaging Quantity	9

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250)

	Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles'(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Also in the Series | 0.64/025 Connector System




Automotive Connector Caps & Covers (6)




Automotive Housings(180)



Automotive Signal & Power Headers (172)

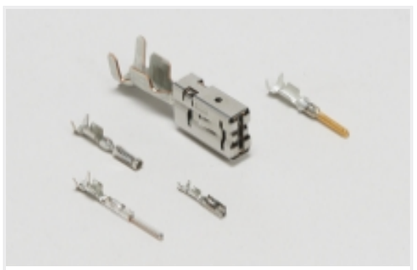

Automotive Terminals(21)

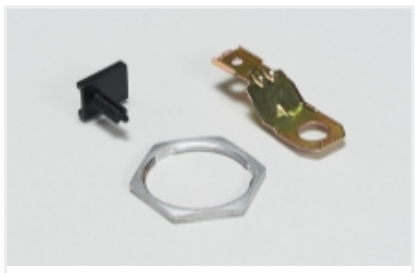

Other Automotive Connector Accessories(5)

Customers Also Bought



TE Part #2-33462-1
TERM, SOLIS, R, 8, M8(5/16)



TE Part #42913-2
RING TONGUE 10-6 AWG BR



TE Part #927768-1
JPT REC 2.8 Contact SRC Sn



TE Part #1241408-1
AMP MCP 6.3/4.8K, CONTACT



TE Part #1564324-1
AMP MCP 1.5K, CONTACT, SWS



TE Part #2214869-1
MiniSAS HD, 1x2 Rec Assy w/ weld



TE Part #2227580-1
1X1 R/A ASSY, MINI SAS HD INTERNAL



TE Part #2304168-9
4P MATE-AX, HDR ASSY,90 DEG,COD Z



TE Part #1-2333508-1
AMP MCP 2.8 SOCKET HSG 21 POS SEALED



TE Part #2348764-1
HD MATEnet 1+12 REC HSG ASSY, GRP E

Documents

Product Drawings

0.64 SERIES 40 POSITION CAP ASSY H-TYPE

Japanese

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2292113-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2292113-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2292113-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

Crimping of 025 Receptacle Contact

Japanese

Application Specification

Japanese

Application Specification

Japanese