2363638-2 ✔ ACTIVE


LUMAWISE | LUMAWISE Endurance S

TE Internal #: 2363638-2

Connector, Black, 27.4 mm Height, Keyed / Not Vented, UL, 4 Position, Sealable, Wire & Cable, -40 – 90 °C [-40 – 194 °F], LUMAWISE Endurance S

View on TE.com >

Connectors > Lighting Connectors > Street Lighting Controls > Street Lighting Connectors

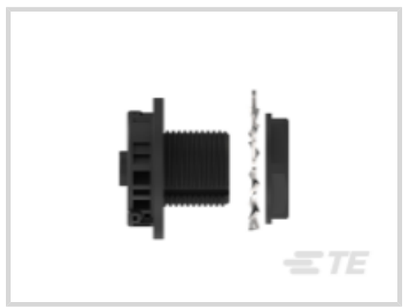


Lighting Product Type: **Connector**

Primary Product Color: **Black**

Product Height: **27.4 mm**

Lighting Connector Features Included: **Keyed, Not Vented**

Compatible With Agency/Standards Products: **UL**

Features

Product Type Features

Lighting Product Type	Connector
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Lighting Connector Features Included	Keyed, Not Vented
Number of Positions	4

Body Features

Primary Product Color	Black

Contact Features

Contact Current Rating (Max)	1.5 A

Dimensions

Product Diameter	36.5 mm
Product Height	27.4 mm

Usage Conditions

Operating Temperature Range	-40 – 90 °C[-40 – 194 °F]

Industry Standards

IP Rating	IP66
Compatible With Agency/Standards Products	UL

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 1-2343404-1
MODULE ASSY,80MM LUMAWISE S, KEYED,vented



TE Part # 1-2445583-1
LUMAWISE MOTION - LOGIC OUTPUT, CIRC.



TE Part # 2341474-2
SEALING CAP, RCPT, LUMAWISE ENDURANCE S



TE Part # 2341474-1
SEALING CAP, RCPT, LUMAWISE ENDURANCE S




TE Part # 2382635-1
LUMAWISE POWER INPUT TERMINAL BLOCK (TB)



TE Part # 2-2343404-1
MODULE, 80MM LUMAWISE ENDURANCE S,KEYED




TE Part # 2445583-1
LUMAWISE MOTION - LOGIC OUTPUT, RECT.



TE Part # 2396687-5
SEALING CAP, RCPT, LUMAWISE ENDURANCE S

TE Part # 2343405-1
MODULE,40MM LUMAWISE ENDURANCE S. KEYED

Also in the Series | LUMAWISE Endurance S

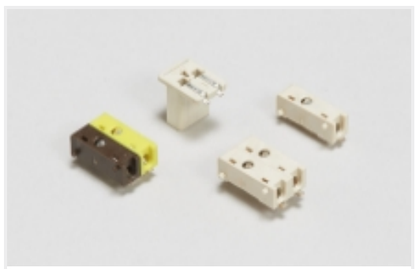

Poke-In Connectors(1)



Street Lighting Connectors(47)



Street Lighting Power Management(5)


Customers Also Bought




TE Part #5426974001
LSTT-25.4-0-SP




TE Part #5052954017
RNF-100-3/32-2-SP



TE Part #215877-1
8/8 PCB MOD.JACK SE



TE Part #9-966140-6
MESSERLEISTE 21P



TE Part #1217080-1
FASTON 205/250 PCB MOUNTED TPBR



TE Part #5-1625885-3
1W SM M/OX 5% 2K2



TE Part #2213831-2
BASE ASSY, 80MM, VENTED, SEALED



TE Part #2328823-1
LUMAWISE S 80MM DIA DOME SMOKE GRAY LOW



TE Part #1-2328823-1
LUMAWISE S 80MM DIA DOME CLEAR LOW



TE Part #5520251-4
MJ,R/A,8P,PNL STOPS

Documents

Product Drawings

Recept, LUMAWISE Endurance S2 Kit,KeyA

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2363638-2_A1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2363638-2_A1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2363638-2_A1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

Datasheet - Lumawise Z10

English

Lumawise Endurance S Modules

English

Product Specifications

Application Specification

English

Agency Approvals

CB_CERT_IEC_61984_US_34131_M1_UL_C1

English

UL_EU_CERT_EN_61984_UL_EU_01778_M1_C1

English

CB_CERT_US_34131_M1_UL_4788988643_TR_C1

English