2376865-4 ✔ ACTIVE

LUMAWISE | LUMAWISE Dimming Receptacle


TE Internal #: 2376865-4


Connector, Not Rotatable, Wire-to-Component, 7 Position, Sealable, Power & Signal, LUMAWISE Dimming Receptacle, ANSI Street Lighting Receptacles

View on TE.com >

Connectors > Lighting Connectors > Street Lighting Controls > Street Lighting Receptacles >

LUMAWISE Endurance N Poke-In: Streetlight Dimming Receptacles

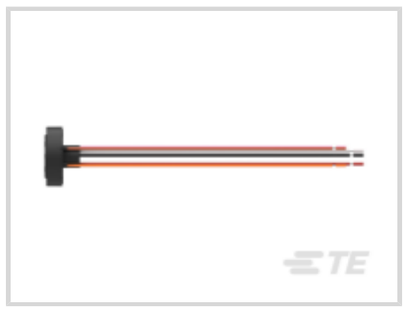Lighting Product Type: **Connector**

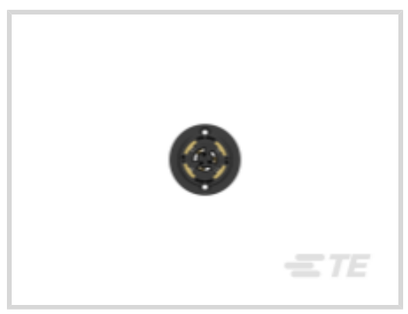Lighting Connector Features Included: **Not Rotatable**

Connector System: **Wire-to-Component**

Number of Positions: **7**

Sealable: **Yes**

All LUMAWISE Endurance N Poke-In: Streetlight Dimming Receptacles (33)

Features

Product Type Features

Connector & Contact Terminates To	Wire & Cable
Lighting Product Type	Connector
Connector System	Wire-to-Component
Sealable	Yes

Configuration Features

Lighting Connector Features Included	Not Rotatable
Number of Positions	7

Electrical Characteristics

Operating Voltage	600 VDC

Body Features

Primary Product Color	Black

Contact Features

Contact Current Rating (Max)	15 A
Contact Mating Area Plating Material	Gold (Au)

Dimensions

Wire Size	18 – 14 AWG

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]

Operation/Application

Circuit Application	Power & Signal

Industry Standards

Compatible With Agency/Standards Products	ANSI

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # 1-2325661-1
LUMAWISE ENDURANCE N SHRTG CAP BASE VENT



TE Part # 2213730-1
LIGHT CONTROLLER BASE ASSEMBLY, 76MM DIA



TE Part # 2336396-1
ASSEMBLY, LIGHT CONTROLLER BASE, W/VENT



TE Part # 2336396-2
ASSEMBLY, LIGHT CONTROLLER BASE, W/VENT



TE Part # 2325661-1
LUMAWISE ENDURANCE N SHRTNG CAP BASE ASM



TE Part # 2314786-1
LUMAWISE N ENHANCED BASE, FM ON, ZC YES




TE Part # 2382635-1
LUMAWISE POWER INPUT TERMINAL BLOCK (TB)



TE Part # 2213871-2
LIGHT CONTROLLER BASE ASSY, 81MM DIA,7POS


TE Part # 2213871-3
LIGHT CONTROLLER BASE ASSY, 81MM DIA,7POS

Also in the Series | LUMAWISE Dimming Receptacle

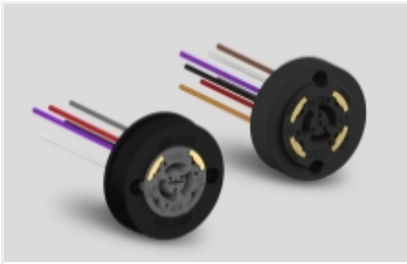

Street Lighting Receptacles(22)

Customers Also Bought

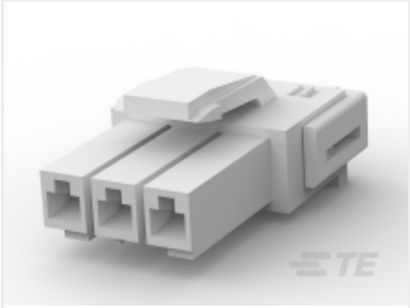

TE Part #5-177899-1
POWER DBL LOCK PLUG HSG 3P (GWT)



TE Part #179594-1
AMP POWER D/LOCK TAB CONT. L/P



TE Part #1744544-2
EP II TPA 02P, BLACK



TE Part #2213627-4
ASSEMBLY, ROT DIM REC 49.22MM 7 POS 105C



TE Part #2321919-3
FRONT TPA PLUG HOUSING, 3 POS




TE Part #CAT-526SDL-SEALTM
Sealed Connector: Terminals, Signal Double Lock, 2.5 mm



TE Part #2321922-3
REAR WIRE SEAL 3PIN



TE Part #2321924-3
RECEPTACLE HOUSING FREE HANGING 3PIN

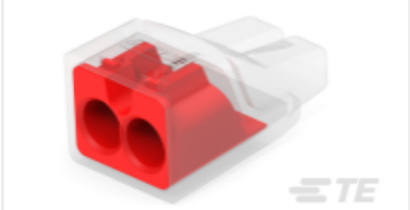

TE Part #2388553-2
PUSH-IN CONNECTOR, 2 POS

Documents

Product Drawings

Rcpt Assy, w/ intg gasket, PC, dimm 3/4

English

CAD Files

Customer View Model

ENG_CVM_CVM_2376865-4_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2376865-4_A.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_2376865-4_A.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

LUMAWISE Endurance N ANSI C136.41 Dimming Receptacle With Integrated Seal

English

LUMAWISE STREET LIGHT DIMMING AND CONTROL QUICK REFERENCE GUIDE

English

Product Specifications

Application Specification

English

Agency Approvals

UL_CERT_CB_4789600659_TR_C1

English

UL_CERT_CB_US_37285_C1

English