

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY- TOGGLE SWITCH

CATALOG LISTING
23AT3-S

23AT3-S

M

DRAWING
NUMBER

6

ISSUE

REPLACES

RELEASE NO. PR-10691

CHECK

REVISIONS

A

PR-10691

G J W

29 OCT 81

B

CO

50566-B

W J M

6 MAY 82

C

CO-64947

D C G

2 MAR 89

D

CO

66089

G R T

8 OCT 90

E

205422

J L H

22 APR 02

CHECK

30 OCT 51

CHECK

30 OCT 51

CHECK

30 OCT 51

CHECK

30 OCT 51

CHECK

30 OCT 51

CHECK

30 OCT 51

CHECK

30 OCT 51

CHECK

30 OCT 51

CHECK

30 OCT 51

CHECK

30 OCT 51

CHECK



30 OCT 51

CHECK

30 OCT 51

CHECK

30 OCT 51

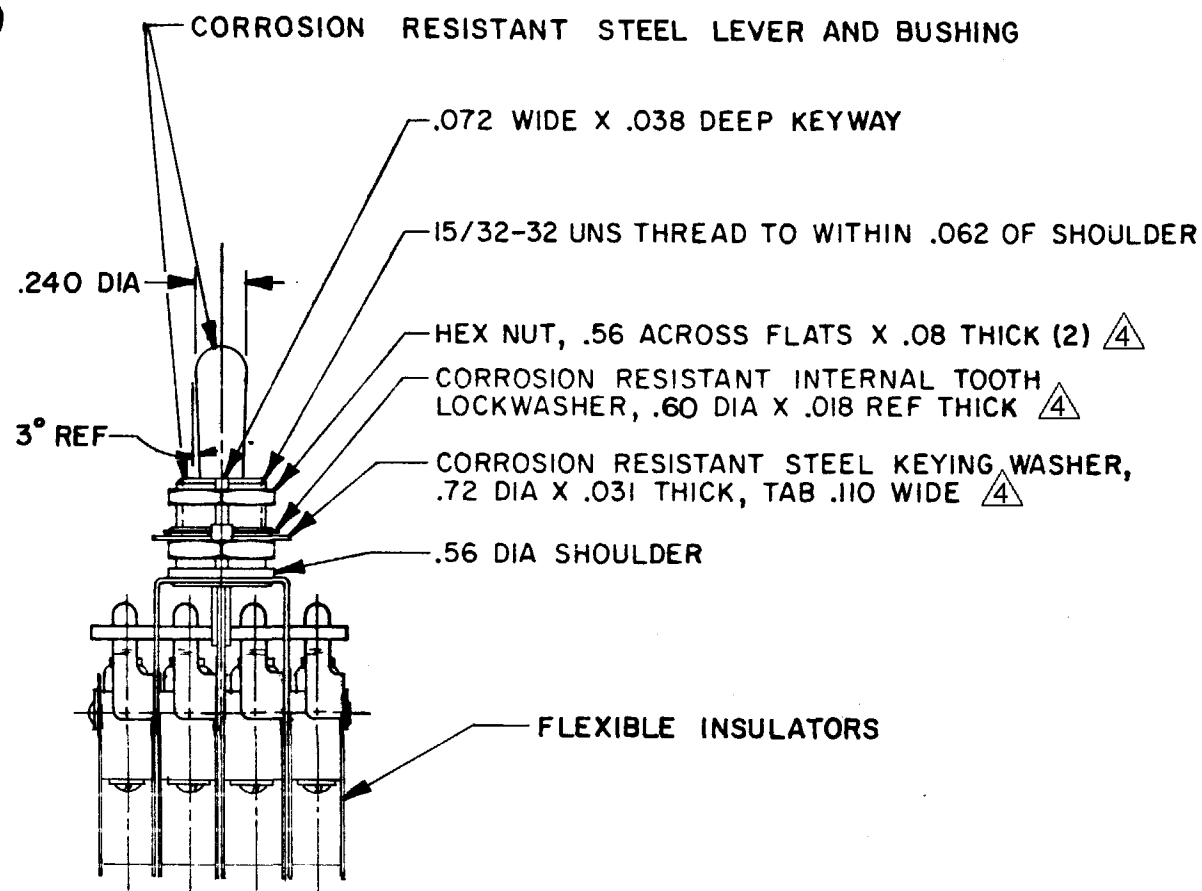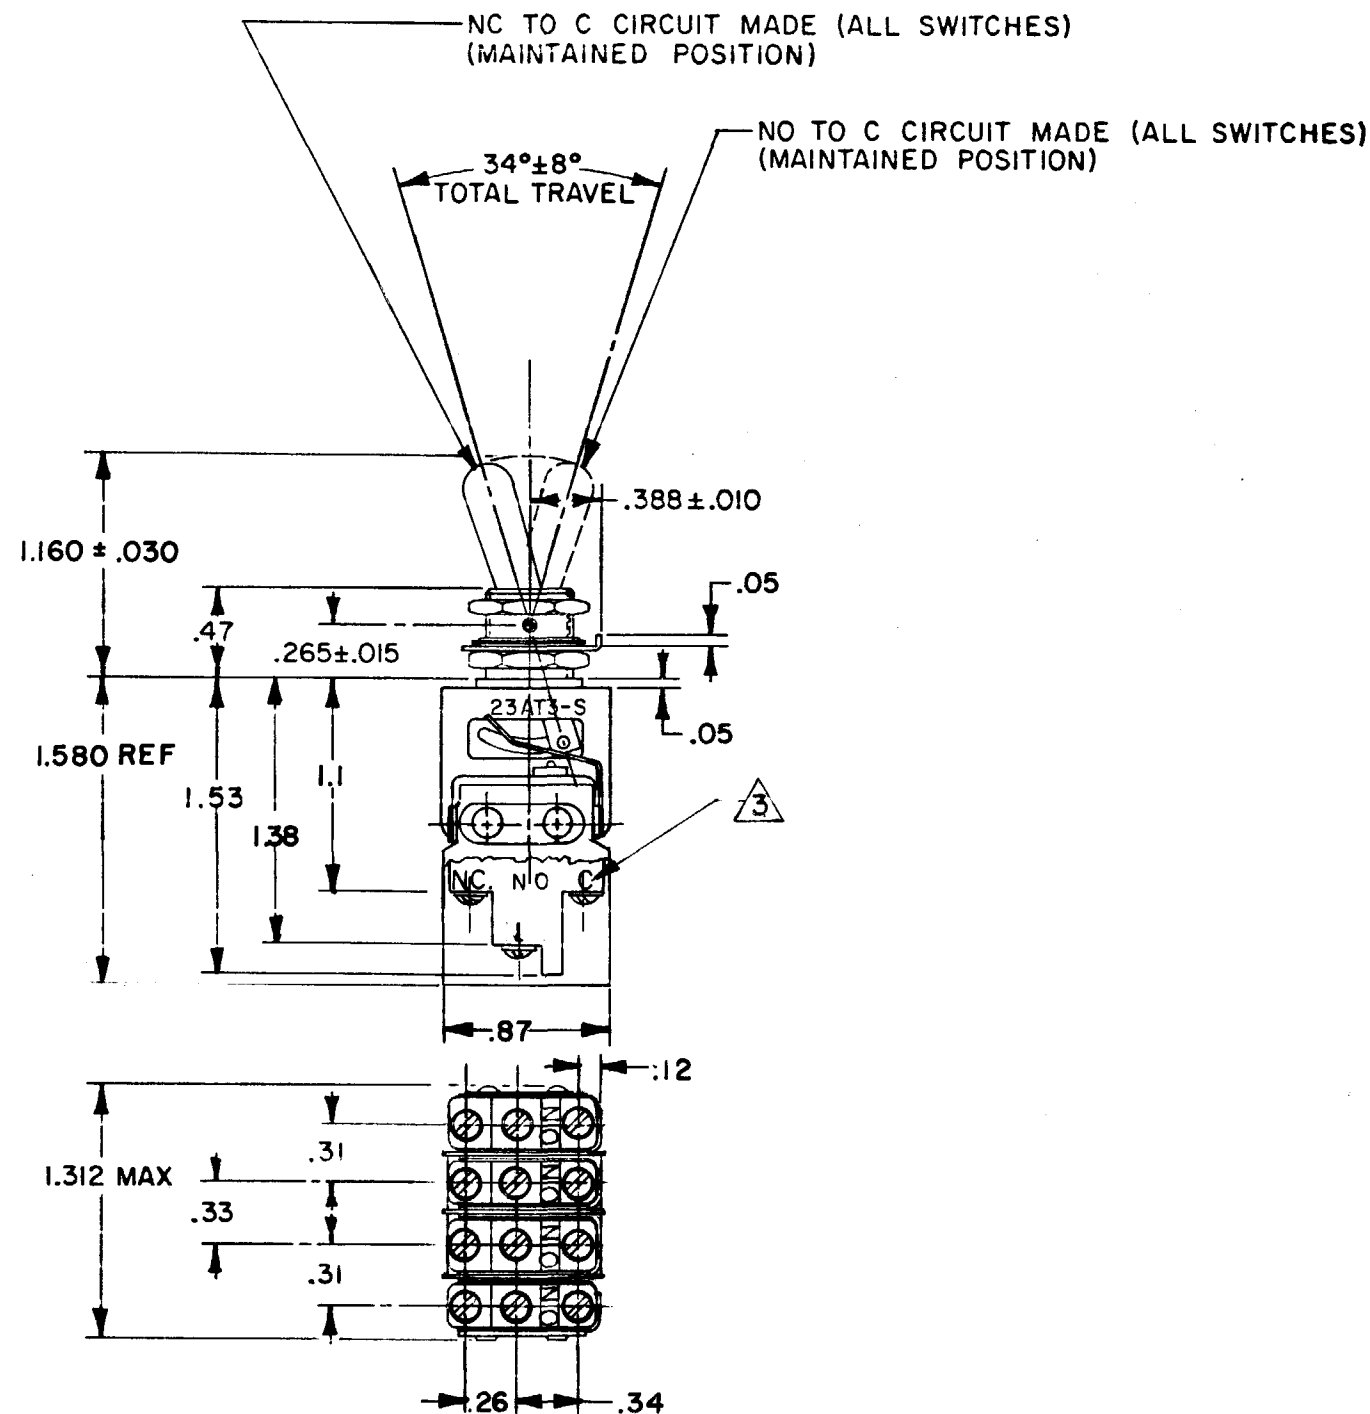

NOTES

- 1 UNIT INCLUDES (4) CAT. LIST. 1SM3-S TYPE BASIC SWITCH
- 2 SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 3 TERMINAL DESIGNATION STAMPED ON SIDE OF SWITCH
- 4 HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET PER MIL-PRF-8805
- 5 - REPLACEMENT MOUNTING HARDWARE PACKET 15PA312-AT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

ELECTRICAL DATA

CONTACT ARRANGEMENT

S P D T (4)

125 OR 250 VAC ----- 5 AMP

30 VOLTS DC RATING

INDUCTIVE ----- SEA LEVEL --- 3 AMP

50,000 FT --- 2.5 AMP

RESISTIVE ----- SEA LEVEL --- 5 AMP

50,000 FT --- 5 AMP

MAXIMUM INRUSH ----- 24 AMP

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	17.04	X	0.670
ONE PLACE	X.X	0.4/0.18	X.X	0.016/0.007
TWO PLACES	X.XX	0.16/0.008	X.XX	0.006/0.0005
THREE PLACES	X.XXX		X.XXX	
ANGLES				

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

THIRD ANGLE PROJECTION

WEIGHT

FO-5235 1-B

DRAWN

G J W

29 OCT 81