



Automotive Parts > Automotive Connectors > Automotive Headers > AMPSEAL Robust Headers



PCB Mount Orientation: **Right Angle**
Contact Current Rating (Max): **8 A**
Termination Method to PCB: **Through Hole - Solder**
Sealable: **Yes**
Centerline (Pitch): **4 mm [.157 in]**

[All AMPSEAL Robust Headers \(8\)](#)

Features

Product Type Features

Header Type	Fully Shrouded
Sealable	Yes
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Right Angle
Number of Positions	14
Number of Rows	3

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Type	Pin
Contact Current Rating (Max)	8 A



Contact Mating Area Plating Material	Tin (Sn)
--------------------------------------	----------

Termination Features

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Mechanical Attachment

Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	With
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	4 mm[.157 in]
--------------------	---------------

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Tray
------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) SVHC > Threshold: Pb (.35% in Component) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.



Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE’s information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) ‘Guidance on requirements for substances in articles’(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of ‘complex object’, the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA “Guidance on requirements for substances in articles” (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Part # 776273-1
14POS,AMPSEAL,SOC HSG ASSY,SLD,
COD 1

Also in the Series | AMPSEAL

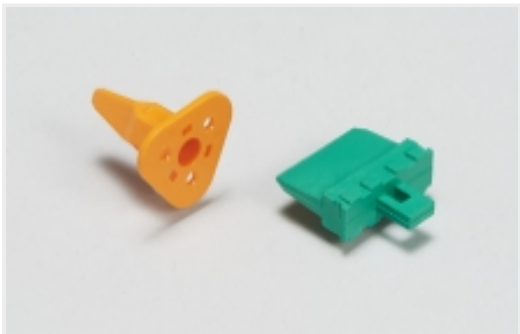


Automotive Connector Locks & Position Assurance(1)



Automotive Housings(34)



Connector Seals & Cavity Plugs(2)

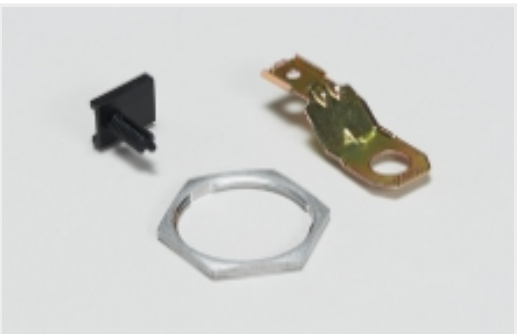

Other Automotive Connector Accessories(2)

Customers Also Bought






TE Part #1-2327025-1
3POS,8MM HV,REC HSG,180 DEG, ASSY,SLD,V0



TE Part #2404135-2
FAMILY SEAL,HVA 280,2P CABLE SEAL,SIZE B

TE Part #1-2310469-4
CABLE SEAL RTNR, SIZE B, HVA280-2PI, V0

TE Part #2334467-2
8POS,1.6X0.6,TAB HSG ASSY,SLD, COD 1

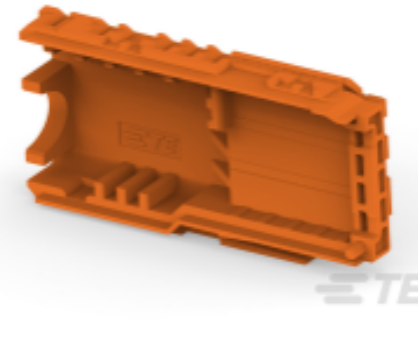

TE Part #2362414-1
CU ALLOY,SHIELD,PCON21,CONN HSG,180DEG

TE Part #1-2400820-1
2POS,CSJ1800,REC OUTER HSG ASSY, 90DEG

TE Part #1-2400820-2
2POS,CSJ1800,REC OUTER HSG ASSY, 90DEG

TE Part #1-2403323-2
2POS,PCON18,REC OUTER HSG ASSY,180,B,W

TE Part #1-2407050-1
2POS,HVA280,REC OUTER HSG ASSY, 180DEG

TE Part #2481575-2
PROP,GASKET

Documents

Product Drawings
14POS,PIN DIA 1.3,HDR ASSY,90DEG
English

CAD Files
Customer View Model
ENG_CVM_CVM_2492564-1_A.2d_dxf.zip
English
3D PDF
3D
Customer View Model
ENG_CVM_CVM_2492564-1_A.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_2492564-1_A.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications



Application Specification

English

Agency Approvals

UL Report

English