



Automotive Parts > Automotive Connectors > Automotive Housings > DT-XT 18-way Plug Connectors



Nominal Voltage Architecture: 12 V

Connector & Housing Type: Plug

Number of Positions: 18

Sealable: Yes

Operating Temperature Range: -55 – 125 °C [-67 – 257 °F]

[All DT-XT 18-way Plug Connectors \(5\)](#)

Features

Product Type Features

Connector Shape	Rectangular
Mixed & Hybrid Connector	No
Connector & Housing Type	Plug
Sealable	Yes
Primary Locking Feature	Integrated in Housing
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	18
Number of Rows	3

Electrical Characteristics

Nominal Voltage Architecture	12 V
------------------------------	------

Body Features



Primary Product Color	Black
Connector & Keying Code	A

Contact Features

Contact Size	Size 16
Mating Pin Diameter	1.55 mm[.061 in]

Mechanical Attachment

Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Centerline (Pitch)	4.66 mm[.183 in]
--------------------	------------------

Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operating Temperature (Max)	125 °C[257 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Packaging Features

Packaging Quantity	400
--------------------	-----

Other

Connector Position Assurance Capable	No
--------------------------------------	----

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: FEB 2026 (253) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC



Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2600046-1

18CCT RECEP BLACK KEYING A W /SEAL

Also in the Series | DEUTSCH DT-XT



Automotive Housings(12)

Customers Also Bought



TE Part #NB53762001

BISS-NO.4-0-STK




TE Part #1060-16-1222

PIN, SF, SIZE 16, 12-16, NI/SN



TE Part #NB17012001

DWP-125-1-1/2-0-STK

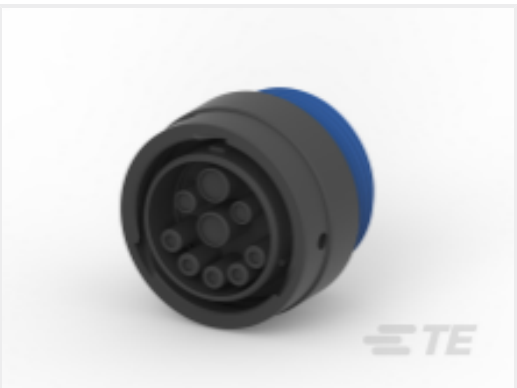

TE Part #YHDP26-24-91SEL024

PLG, 9P, BLK, E, WTHD, 8/12/16, S






TE Part #ADP-SMAM-SMBF-G
SMA Plug to SMB Jack




TE Part #DT06-12SB
PLG, 12P, BLK, N, B



TE Part #1010-070-0606
SEAL, INTF, 6P, RED-ORG, SL RET, DT

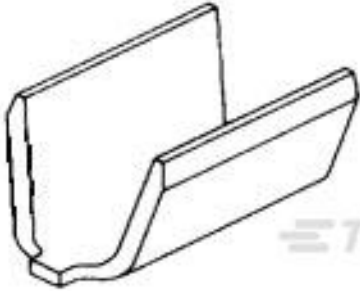

TE Part #60997-1
SPLICE 12000-18000 .025 BR



TE Part #9-2370624-1
CU ALLOY, OUTER FERRULE, DATA DT



TE Part #2-2270024-1
PIN CONN. KITS, PV4-S1M4.0/PV4-S1M6.0

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2600047-1_1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2600047-1_1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2600047-1_1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English