

Single relay - REL-MR- 24DC/21-21 - 2961192

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug-in miniature power relay, with power contact, 2 PDTs, input voltage 24 V DC

Why buy this product

- ✓ RT III-proof (wash-proof)
- ✓ Switching current of up to 8 A

RoHS

Key Commercial Data

Packing unit	1 STK
Minimum order quantity	10 STK
GTIN	 4 017918 158019
GTIN	4017918158019
Weight per Piece (excluding packing)	22.260 g
Custom tariff number	85364190
Country of origin	Austria

Technical data

Dimensions

Width	12.7 mm
Height	29 mm
Depth	15.7 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

Single relay - REL-MR- 24DC/21-21 - 2961192

Technical data

Coil side

Nominal input voltage U_N	24 V DC
Typical input current at U_N	17 mA
Typical response time	7 ms
Typical release time	3 ms
Coil resistance	1440 $\Omega \pm 10\%$ (at 20 °C)
Power dissipation for nominal condition	0.41 W

Contact side

Contact type	2 PDT
Type of switch contact	Single contact
Contact material	AgNi
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	5 V (at 10 mA)
Min. switching current	10 mA (At 5 V)
Maximum inrush current	25 A (20 ms)
Limiting continuous current	8 A
Interrupting rating (ohmic load) max.	190 W (at 24 V DC)
	85 W (at 48 V DC)
	60 W (at 60 V DC)
	44 W (at 110 V DC)
	60 W (at 220 V DC)
	2000 VA (for 250 V AC)
Switching capacity in acc. with DIN VDE 0660/IEC 60947	2 A (at 24 V, DC13)
	0.2 A (at 250 V, DC13)
	3 A (at 24 V, AC15)
	3 A (at 120 V, AC15)
	3 A (at 250 V, AC15)

General

Test voltage relay winding/relay contact	5 kV AC (50 Hz, 1 min.)
Test voltage relay contact/relay contact	2.5 kV AC (50 Hz, 1 min.)
Operating mode	100% operating factor
Degree of protection	RT III (wash-proof)
Mechanical service life	3 x 10 ⁷ cycles
Mounting position	any
Assembly instructions	Can be aligned without spacing (> 70 °C $\geq$ 2.5 mm)

Standards and Regulations

Connection in acc. with standard	CUL
----------------------------------	-----

Single relay - REL-MR- 24DC/21-21 - 2961192

Technical data

Standards and Regulations


Standards/regulations	IEC 60664
	EN 50178
	EN 61810-1
Insulation	Basic insulation
Degree of pollution	3
Overvoltage category	III

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Drilling diagram

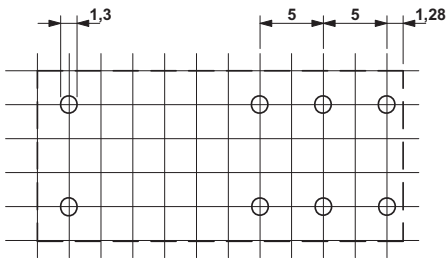

Basic pitch 2.5 mm


Diagram

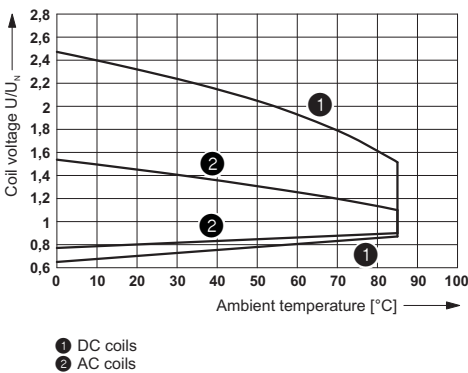


Operating voltage range

Single relay - REL-MR- 24DC/21-21 - 2961192

Diagram

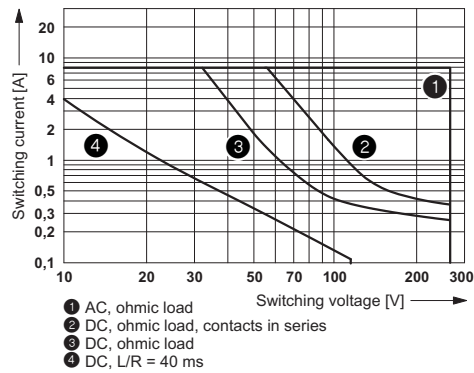


Diagram

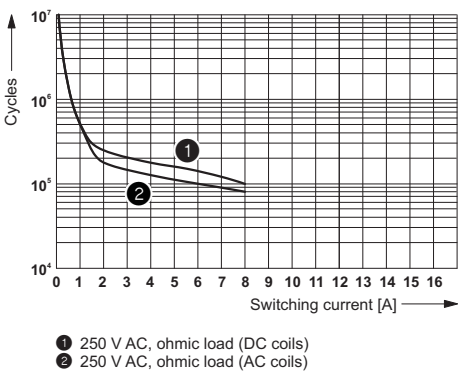

Interrupting rating


Diagram

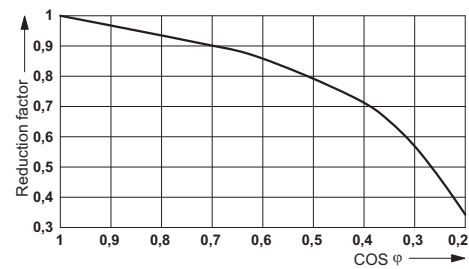


Service life reduction factor with various cos phi

Electrical service life

Dimensional drawing

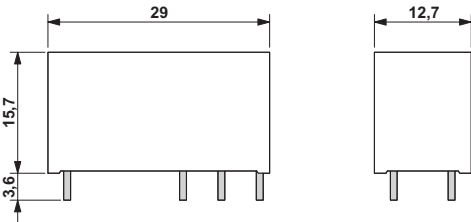

Circuit diagram

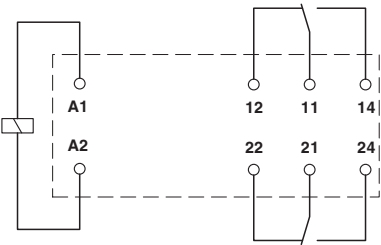

Approvals

Approvals

Single relay - REL-MR- 24DC/21-21 - 2961192

Approvals

Approvals

UL Recognized / cUL Recognized / GL / EAC / EAC / UL Recognized / cUL Recognized / PRS / VDE approval of drawings / cULus Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 228652
cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 228652
GL		http://exchange.dnv.com/tari/	46016-03 HH
EAC			RU C- DE.A*30.B.01082
EAC			EAC-Zulassung
UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 228652
cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 228652

Single relay - REL-MR- 24DC/21-21 - 2961192

Approvals

PRS



<http://www.prs.pl/>

TE/2109/880590/16

VDE approval of drawings



[http://www.vde.com/en/Institute/OnlineService/
VDE-approved-products/Pages/Online-Search.aspx](http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx)

40007758

cULus Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>