

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929


SWITCH-BASIC


CATALOG LISTING
2MN6
S

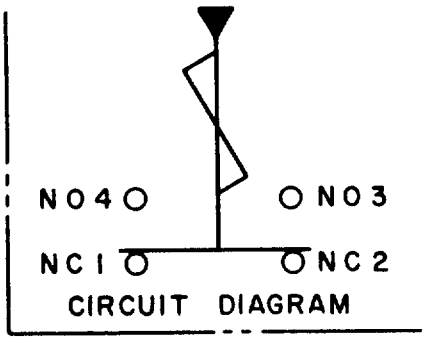


CIRCUIT DIAGRAM

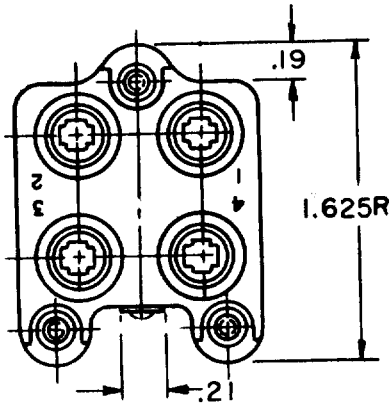

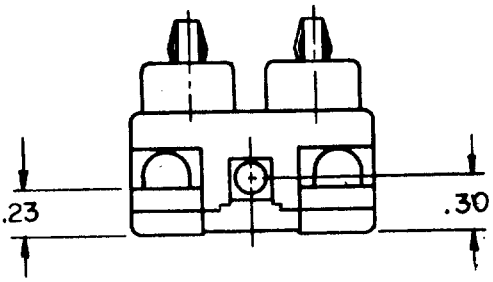

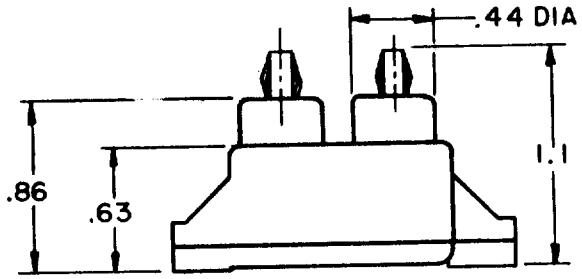

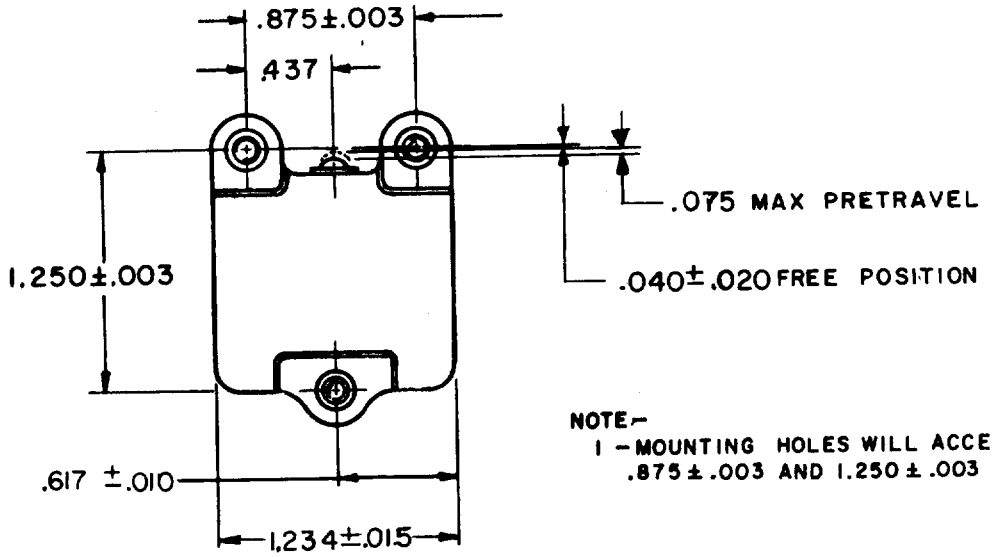

NOTE-
1 - MOUNTING HOLES WILL ACCEPT NO.4 SCREWS ON .875±.003 AND 1.250±.003 CENTER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — 16-24 OZ
RELEASE FORCE — — — — — 10 OZ MIN
DIFFERENTIAL TRAVEL — — — — — .011 -.020
OVERTRAVEL — — — — — — — .017 MIN
RELEASE TRAVEL — — — — — — .022 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SEE CIRCUIT DIAGRAM

10 A-120, 240, OR 480 VAC, 1/2 HP-120 VAC
1 HP-240 VAC; 0.8 A-115 VDC; 0.4 A-230 VDC
0.1 A-550 VDC
PILOT DUTY: 600 VAC MAX

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

2MN6
M
ISSUE 6
DRAWING NUMBER
RELEASE NO.
REPLACES

REVISIONS

A	C015200	WEG 22 JUNE 65
B	C023123	ORD 21 MAR 68
C	C025152	GES 11 FEB 69
D	C057992	MAM 24 SEP 85

DRAWN WEG 22 JUNE 65
CHECK LSD 22 JUN 65
CHECK DEO 22 JUN 65
CHECK

FO-50376